



Catalogue 2025

**NOVY**

# Welcome to Novy

For over 50 years, Novy has approached each project with the same goal: to combine quality, craftsmanship and design with the finest materials and expertise to bring silence to your kitchen. Creating enduringly beautiful appliances that perform day after day, year after year, all Novy products are supplied with a 2+3 years parts and labour warranty.

Enhanced by the trend for open plan living, extraction and surface cooking itself has become a defining feature of the modern kitchen. Novy provides subtle, elegant and high design statement products that always complement the architectural character of the space. We believe a beautifully designed and crafted kitchen is a statement of quality and there is no better way to make a lasting impression than with Novy. Novy is for every kitchen where performance matters, whether your home is a rural retreat or modern city sleek.

5  
YEARS  
WARRANTY

## 5 years warranty



2 year manufacturer warranty and extra 3 year warranty after registerion on [www.novy.com/en-gb/service/information/register-your-device](http://www.novy.com/en-gb/service/information/register-your-device). This covers all the costs of any repair (parts, call out fees and labour) on Novy cooker hoods, worktop extractors, induction hobs, gas burners and design lighting. You do not need to sign a maintenance agreement or contract for this, all you have to do is register.

## Price list

View the  
price list  
online here



\* The warranty period begins on the date of purchase (billing date). If no invoice can be presented, the date of production shall apply. You can find the full terms and conditions on [www.novy.com/en-gb](http://www.novy.com/en-gb).  
Novy Ltd does not cover expenses or consequential losses that may incur. The warranty provision excludes accidental damage and misuse.

Novy, your kitchen's secret ingredient

02



ABOUT  
NOVY

Cooker hood guidelines

24



COOKER  
HOOD  
GUIDELINES

Venting hobs

34



VENTING  
HOBS

Ceiling units

80



CEILING  
UNITS

Built-in cooker hoods for deep cabinets

126



BUILT-IN  
COOKER  
HOODS

Telescopic cooker hoods for shallow cabinets


144



TELESCOPIC  
COOKER  
HOODS

Wall-mounted cooker hoods

168



WALL-  
MOUNTED  
COOKER  
HOODS

Island cooker hoods

188



ISLAND  
COOKER  
HOODS

Cooker hood accessories

216



COOKER  
HOOD  
ACCESSORIES

Hobs

228



HOBS

Designer lighting

258



DESIGNER  
LIGHTING

Info

280



INFO



# Welcome to the world of Novy

With a rich history and more than 110 years on the clock, Novy has since become a leading brand specialising in high-quality cooker hoods hobs and designer lighting for kitchens and living rooms.

NOVY

When 'good' is simply not enough and only 'the best' will do, Novy brings you advanced, whisper-quiet and efficient worktop extractors and fume hoods. Years of craftsmanship and persistent innovation are our absolute driving forces. From the beginning, the highest standards were set in terms of design, ease of use, durability and, of course, silence. We also offer an exclusive collection of designer lighting, equipped with pioneering and award-winning control technology and perfectly matched to our innovative worktop extractor.

Novy products exude quality and contemporary minimalism and are still developed and manufactured with extreme precision and according to strict quality standards at our facility in West Flanders, Belgium. Today, our products still stand for quality, craftsmanship and innovation. Several products have already won international awards such as Red Dot Award, iF Design Award, Kitchen Design Award, etc.

We are also proud to be part of the Middleby family. In addition to leading brands such as AGA, La Cornue, Rangemaster and Viking, Novy now also belongs to Middleby Residential, a division of The Middleby Corporation.

## Middleby Residential

Middleby Corporation, a world leader in foodservice equipment, through its various brands and strategic acquisitions, has an extensive portfolio that includes not only residential kitchen equipment, but also commercial and industrial equipment for food preparation, processing, cooking and baking.

Middleby Residential targets the premium kitchen equipment market and offers a wide range of innovative, high-quality appliances for residential kitchens. Its products integrate advanced technology and design and target the premium segment of the market.

Some of Middleby Residential's brands include :

**NOVY**  
Your kitchen's secret ingredient

**VIKING**

**LA CORNUE**

**AGA**

**LYNX**

**U-LINE**

**MARVEL**

**KAMADOJOE**

**MASTERBUILT**

**Char-Griller**

**ēvo**

---

Power, silence and connectivity.

We are the secret ingredient in your kitchen. The silent power of our expertise is incorporated in everything we make. Our cooker hoods and hobs are extremely silent in use and the lighting minimalistic in design, created to bring peace to the heart of your kitchen. Powerful too, built with an eye for precision and perfection. And designed so that you can comfortably cook, thanks to smart technology that lets your kitchen appliances communicate. Power, silence and connectivity. And all this behind the scenes.

**Novy, your kitchen's secret ingredient**

---



# POWER

Power is driven by passion. As pioneers, we use this unadulterated energy to push our boundaries further and further. This will to improve, to continue to refine, is for us the basis of everything we create. Every cooker hood, hob and designer lighting is the result of avant-garde technology and years of craftsmanship. Because pure power is what drives us. And that's no different for our appliances.


**Novy, your kitchen's secret ingredient**

---

# The power you feel but don't see

Performance is always our first goal. The constant question "Can it be done differently and better?" has led to the development of numerous innovations. Whether it's peripheral extraction, adjustable-height extraction, or automatic power regulation – all Novy range hoods are designed to be quieter than cooking sounds, where efficiency and ease of use are just as important. To achieve this, we combine powerful, highly efficient motors in an optimised casing. Whether you choose a classic exhaust system or the energy-saving recirculation version – unpleasant odors are reliably, quietly, and quickly removed from the kitchen.

- High-quality materials and workmanship
- Integrated motor or remote motor
- Innovative extraction
- Multi-layer grease filter
- Extraction or recirculation

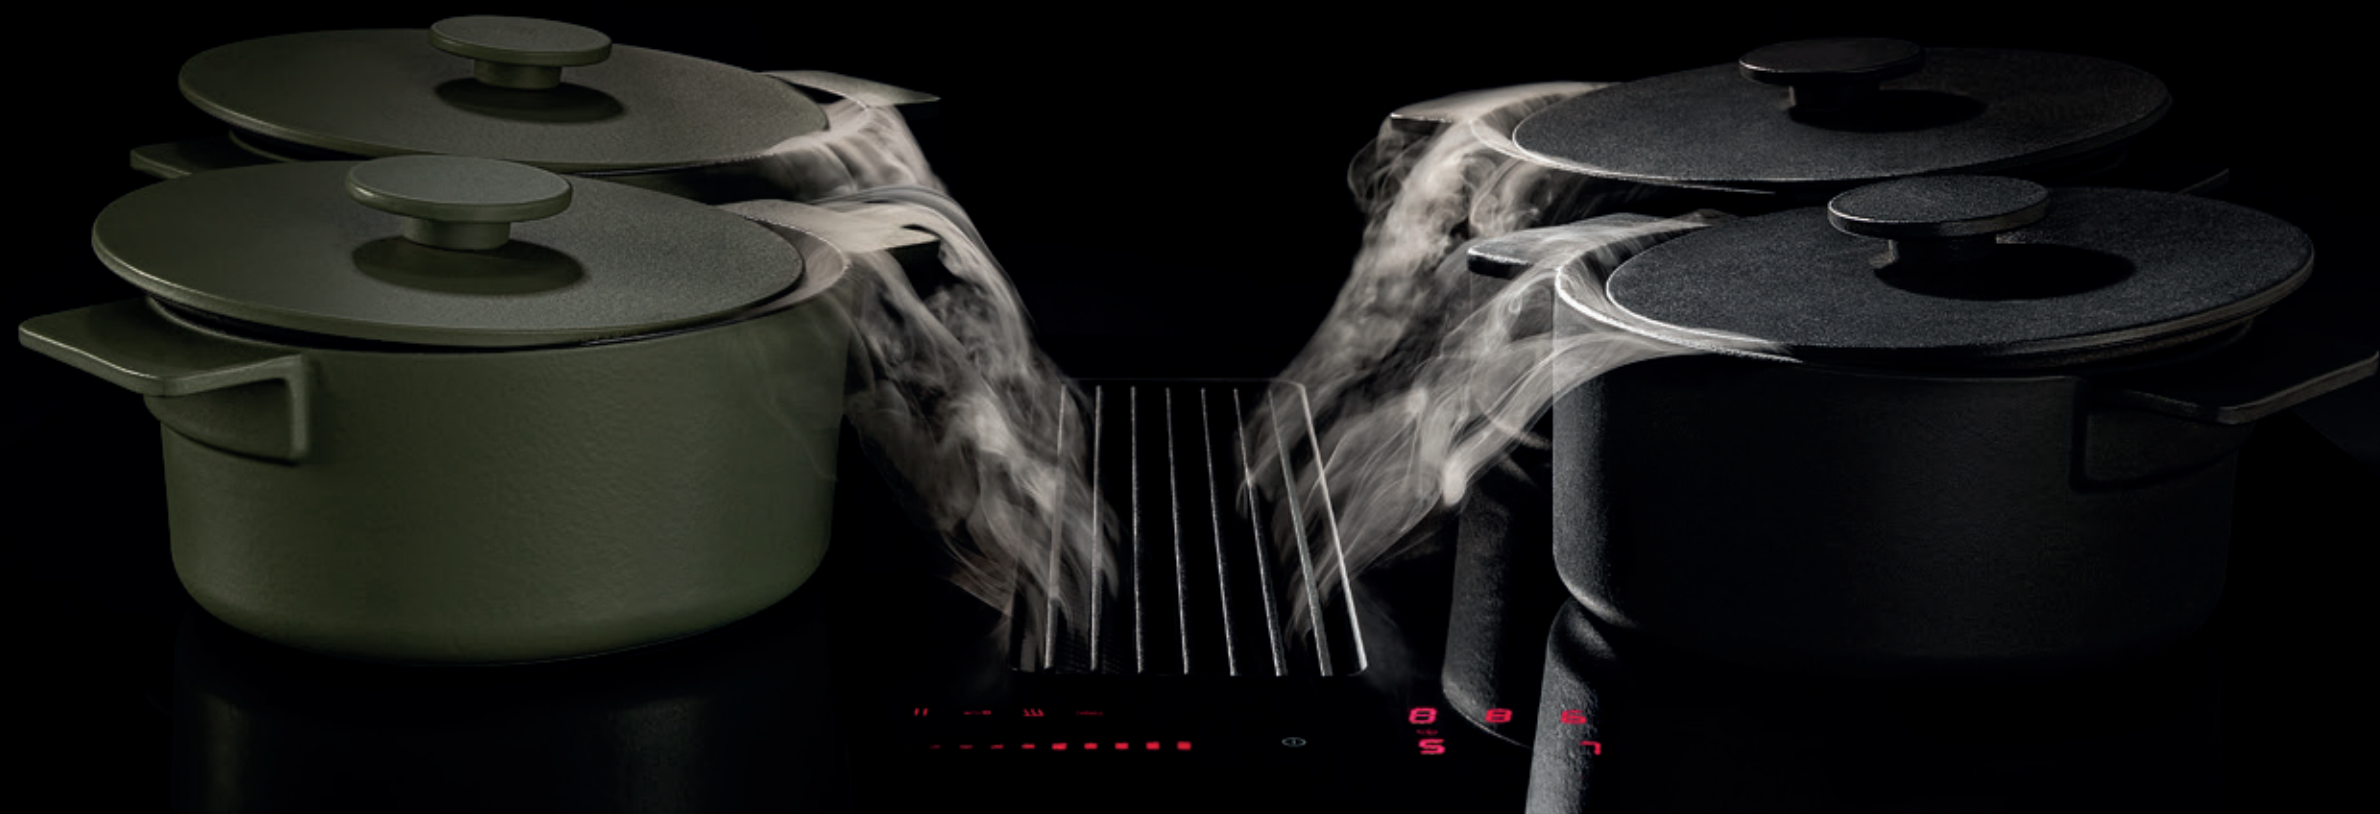





# Craftsmanship with a soul

Our strength lies in solid and well-considered work. In extremely silent, yet high-performance motors. In technology, driving to the limit. In wanting to excel. In commitment. But also in our hands.

For us, craftsmanship is the starting point for delivering quality. We share this knowledge and form the connecting factor between pure design, a well-considered choice of sustainable materials and perfect execution. Our thinking is reflected in every cooker hood and hob developed and produced in Belgium.

Because that finesse is what turns cooking into an art.





# SILENCE

Silence is what you need to achieve perfection. That's why, at best, there's a whisper in the wings, and why the finishing touch is added to the board with the utmost precision. It's also why our cooker hoods, hobs and designer lighting are remarkably discreet, shrouded in minimalism and visual tranquillity. We make it our mission to make appliances that are ultra-quiet, without disturbing noise. The result is a design that is pure - nothing but the essence - and a cooker hood that is always quieter than what you cook.

**Novy, your kitchen's secret ingredient**

---





## We bring silence to your kitchen

We bring peace to your kitchen so you can put passion in your cooking. We polish our designs to pure lines that combine subtlety with performance. Discreet, silent and strong in their abstraction. Because for us, every detail is a consideration, every choice made to give you freedom.

We understand the power of subtlety. That is why our designs are resolutely geared towards a calm interplay of lines and an eye for detail. Sophisticated design leads the way, combined with comfort in every action.


## Strikingly inconspicuous

Our cooker hoods are designed to be quieter than what you are cooking. We've developed an advanced noise reduction system and a double-walled base plate: optimised aerodynamics that reduce resistance. Therefore: less noise, less distraction and also energy efficient.

- Quiet motor
- Advanced silencing system
- Double-walled insulated base plate
- Ventilation tower with adjustable heights
- Recirculation or ducted to the outside
- Adjustable lighting

## Visual perfection

Our desire for perfection translates into appliances that blend in seamlessly with their surroundings. We extend this visual tranquillity into every detail to create the timeless elegance.









## MODERN DESIGN

# Novy Mineral Black

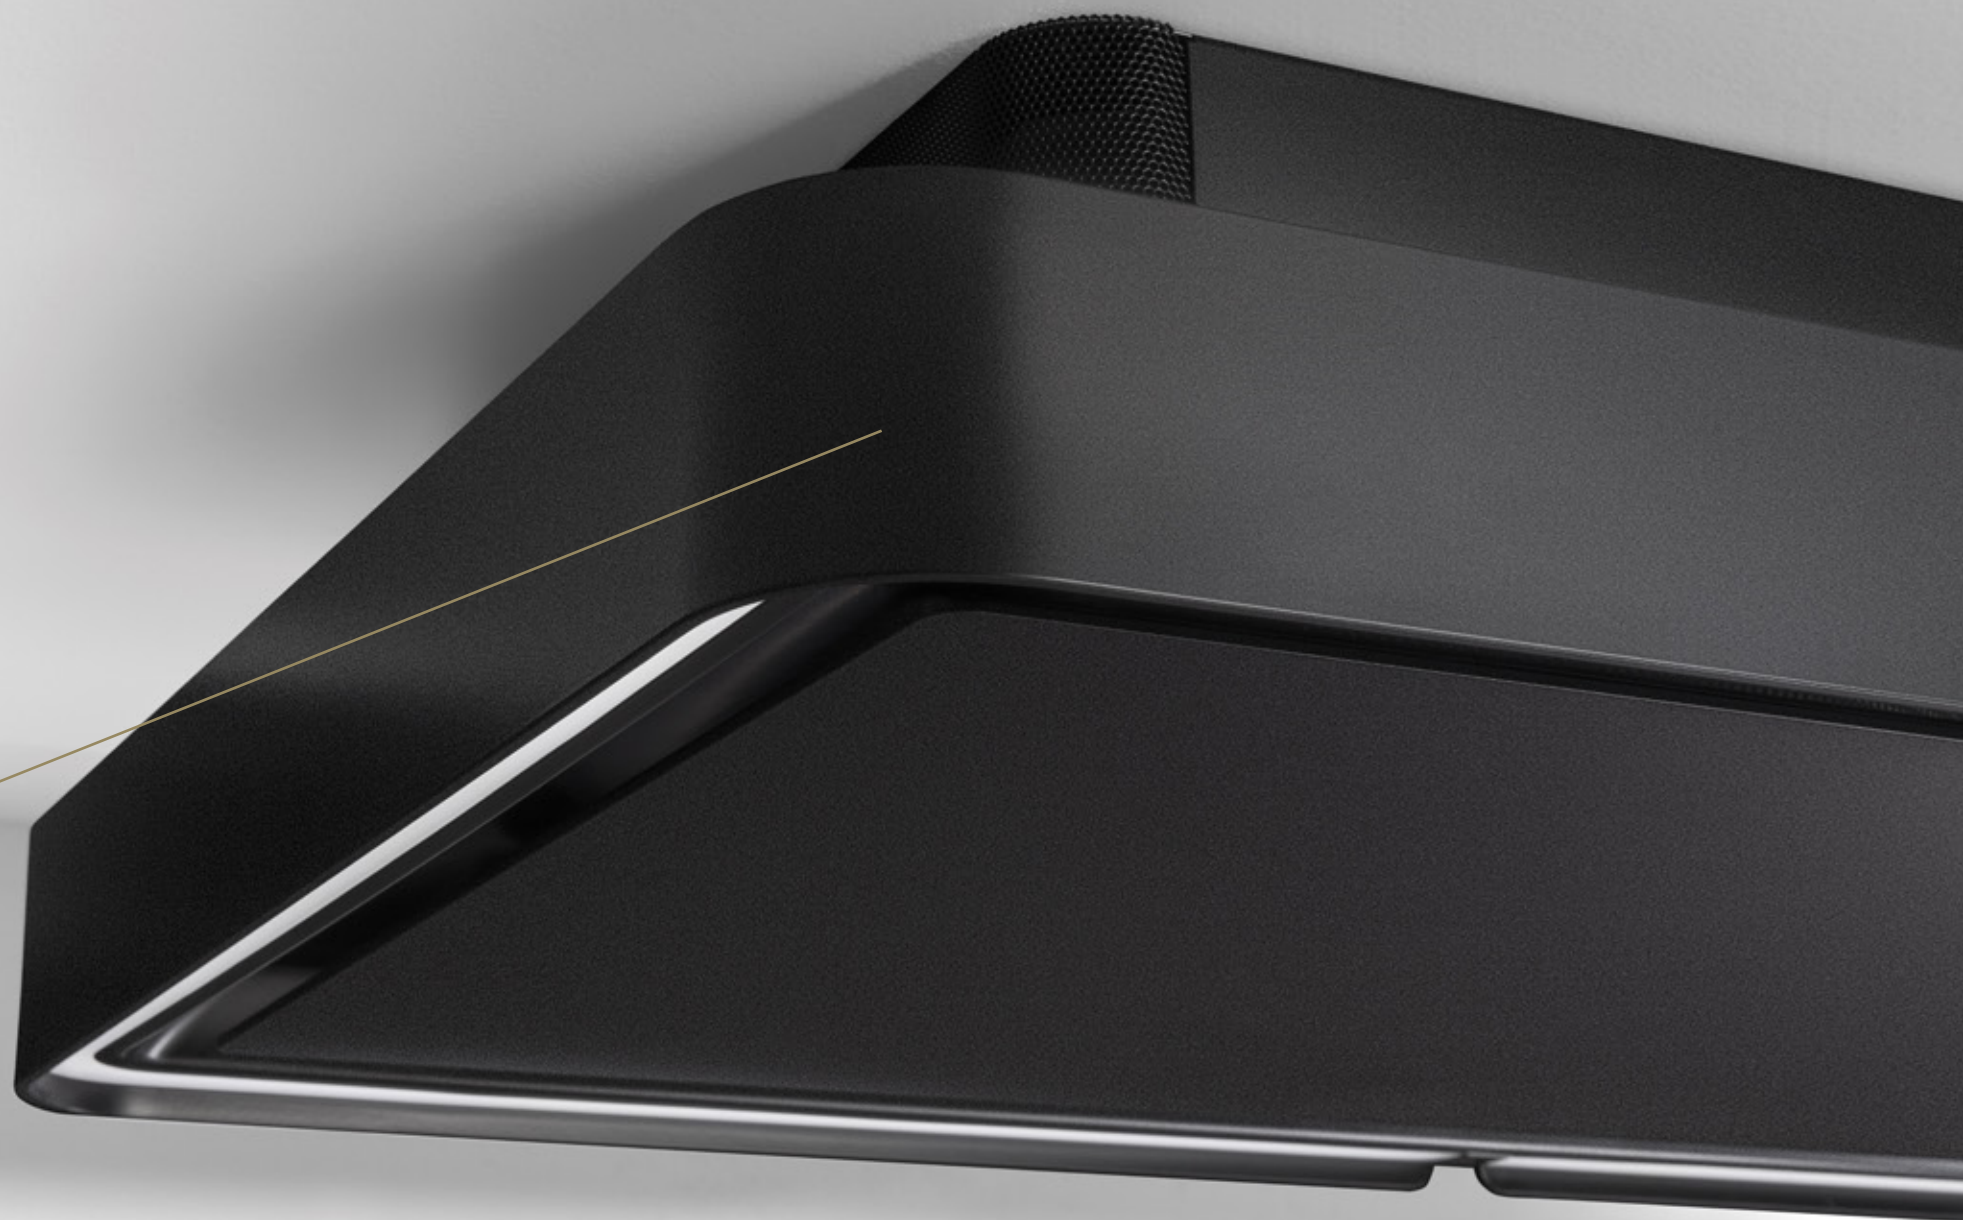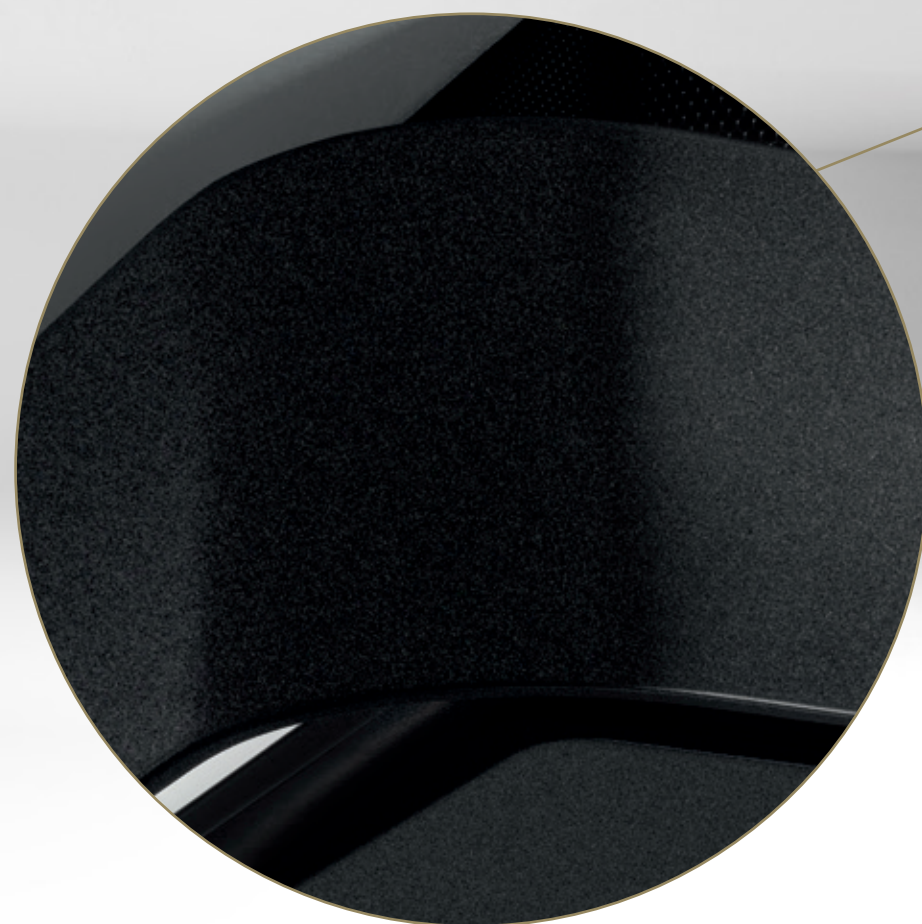

### Stylish design effect

Trends come and go in the kitchen, but black will always remain. However, not all black is the same. Mineral Black, a matte black that stands out because of its subtle structure.

### Low-maintenance

Besides the aesthetic element, there is also a practical advantage. Thanks to its structure, Mineral Black is very easy to maintain and less sensitive to fingerprints.

The following devices are available in Mineral Black :

- **Novy Cloud**
- **Novy Pureline Pro (Compact)**
- **Novy Pureline Compact**
- **Novy Mini Pureline**
- **Novy Flatline wall-mounted and island**
- **Novy Pureline Frame**
- **Novy Phantom**
- **Novy Mood**
- **Exhaust boxes**
- **Designer lighting**





# CONNECT

Intuition is the guiding principle in the kitchen. Our smart technology is designed to let you cook comfortably and to follow your own intuition. By simplifying your life, we give you the freedom to create, to improvise. That's why we continue to refine our technology so that your cooking becomes an experience, a combination of elegance and delicacy. For us, it's all about connection: between people, but also between the cooker hood and hob. Because working together is simply stronger.

**Novy, your kitchen's secret ingredient**

---

## Connect in a snap

Our smart features let you become one with your kitchen. Thanks to innovative technology, your pots and pans no longer boil over. Moreover, they always stay at the right temperature, even when you move them. And now you're even alerted when your filters need maintenance so you can continue to enjoy optimum performance. That's how Novy becomes the secret ingredient in your kitchen: a smart tool that makes cooking easier for you.

### Intuitively operated

As a specialist, we've developed a new generation of cooker hoods and hobs. Efficient and designed with the desire to take your cooking to the next level. Above all, it's intuitive, so every command is at your fingertips. How do we make it happen? With the InTouch technology and the Novy Connect App.

The **InTouch technology** allows you to operate the cooker hood from your induction hob. All functions are at your fingertips: handy, simple and intuitive. Moreover, there is no need for extra cabling.

In the **Novy Connect App**, the communication between cooker hood, hob and yourself gets more depth. You can easily adjust the settings regarding extraction and lighting according to your own wishes and needs. Those settings can be saved so that your cooker hood can work in a completely personalised way. What's more, you are guided through the maintenance of the various filters.



Connectivity matters to us:  
between people around the  
cooking island, and between the  
cooker hood and the hob.

**Video**  
With Novy, you can enjoy the ultimate cooking  
experience thanks to the Novy Connect technology.







## Pure technology

Using technology to make your life easier, that's our goal. That's why we develop practical applications that immediately improve the quality of your cooking experience. Smart technology knows when you put a pot on the hob, and even when you move it.

Temperature settings ensure that the water does not boil over. This way, cooking becomes pure intuition, a mix of creativity and freedom.

Our recirculation systems are as durable as they are effective. They eliminate the strongest odours from your kitchen without extracting hot air to the outside. This allows you to recover heat and save energy. And it doesn't stop there, a hood with recirculation provides greater flexibility and is easier to install.

- **Intuitive operation**
- **Combined smart technology**
- **Convenient flexzones**
- **Pot Move function**
- **InTouch technology**
- **Pleasant indoor climate**




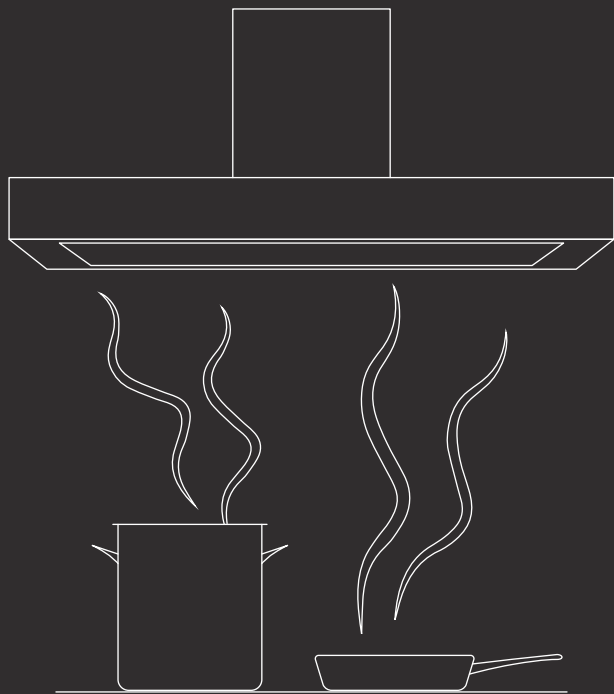


# Cooker hood guidelines

The best extraction solution for your kitchen often depends on the architecture of the property you live in, and the style of cooker hood that suits you and your requirements. The following step-by-step plan will help you select the correct kitchen ventilation solution for you.

## Step 1 How wide should your cooker hood be?


Cooking vapours do not rise straight up, but at an angle between 10 and 15 degrees. For proper operation, the cooker hood must be at least the full width of the hob. For an island arrangement, choose a wider model for efficient extraction. The maximum height of your cooker hood also plays a role. These can be found via the symbol  on the product pages.



## Step 2 Extraction to the outside or recirculation?

The choice between extraction to the outside or recirculation depends on the architecture of your property, your wishes and possibilities. It has a major impact on the installation of the kitchen.

Is extraction to the outside (via the roof or facade) possible?

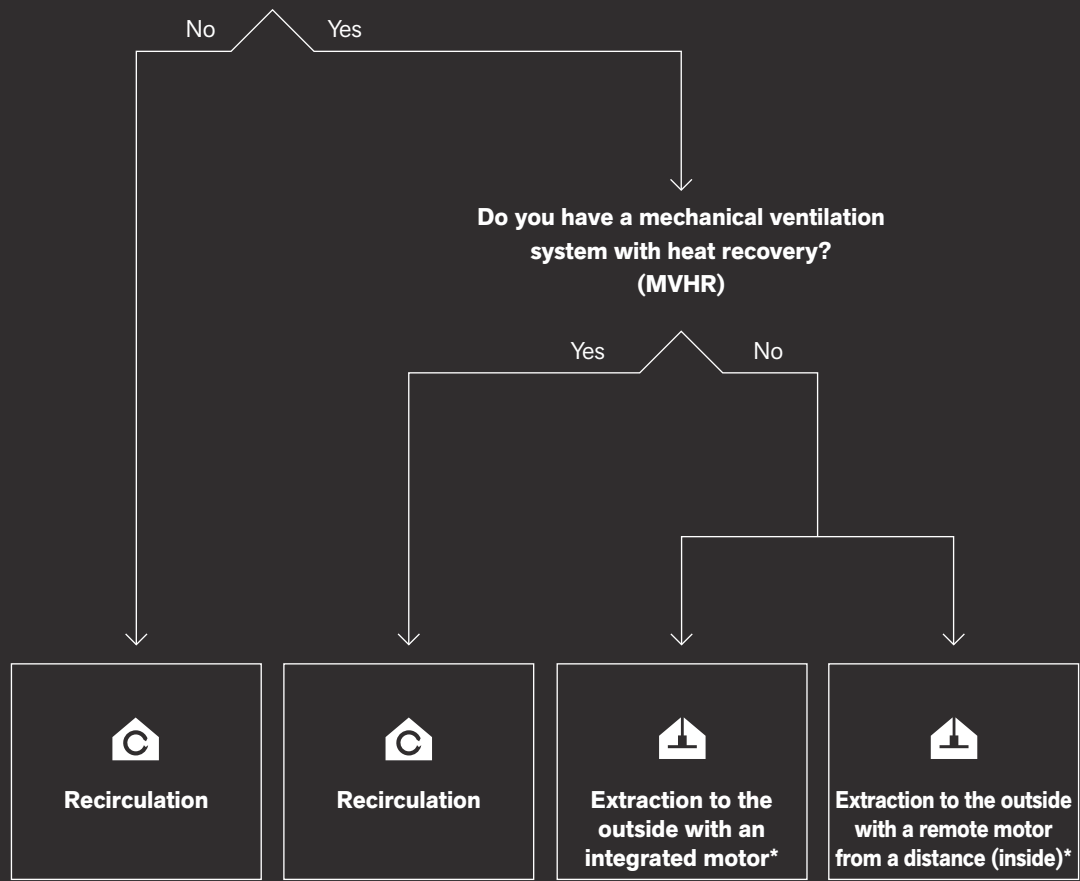

Extraction to the outside is the best solution, but recirculation is an option provided there is sufficient ventilation (to be provided by the customer).

A remote motor enables a limited built-in height for the Pureline and Mini Pureline.

### \* No outlet without an inlet

A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).





## Step 3

Where should  
you place the  
cooker hood?

How wide  
is your hob?



In the worktop




Above a cooking  
island



Integrated  
in a ceiling or recess



Telescopic  
built-in or under  
the cabinet

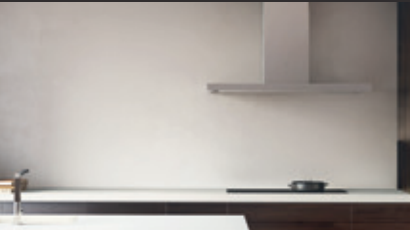

Wall-mounted  
with a decorative  
cooker hood

65 cm

**Venting hobs, see p. 34**  
Novy Easy 65

**Select a cooker hood of at least 90 cm**  
**Ceiling units, see p. 80**  
Novy Cloud  
Novy Maxi Pureline  
Novy Pureline (Pro) (Compact)  
**Island cooker hoods, see p. 188**  
Novy Phantom Frame & Cable  
Novy Pureline Frame  
Novy Mood  
Novy Flatline

**Select a cooker hood of at least 60 cm**  
**Ceiling units, see p. 80**  
Novy Pureline Pro (Compact)  
Novy Pureline (Compact)  
**Built-in cooker hoods, see p. 126**  
Novy Mini Pureline  
Novy Crystal  
Novy Canopy Essence

**Select a cooker hood of at least 60 cm**  
**Telescopic cooker hoods, see p. 144**  
Novy Fusion  
Novy Fusion Pro  
Novy Telescopic stainless steel  
Novy Telescopic Essence

**Select a cooker hood of at least 75 cm**  
**Wall-mounted cooker hoods, see p. 168**  
Novy Vision  
Novy Flatline  
Novy Salsa

80 cm

**Venting hobs, see p. 34**  
Novy Easy 80

**Select a cooker hood of at least 90 cm**  
**Ceiling units, see p. 80**  
Novy Cloud  
Novy Maxi Pureline  
Novy Pureline (Pro) (Compact)  
**Island cooker hoods, see p. 188**  
Novy Phantom Frame & Cable  
Novy Pureline Frame  
Novy Mood  
Novy Flatline

**Select a cooker hood of at least 90 cm**  
**Ceiling units, see p. 80**  
Novy Pureline Pro (Compact)  
Novy Pureline (Compact)  
**Built-in cooker hoods, see p. 126**  
Novy Mini Pureline  
Novy Crystal  
Novy Canopy Essence

**Select a cooker hood of at least 90 cm**  
**Telescopic cooker hoods, see p. 144**  
Novy Fusion  
Novy Fusion Pro  
Novy Telescopic stainless steel  
Novy Telescopic Essence

**Select a cooker hood of at least 90 cm**  
**Wall-mounted cooker hoods, see p. 168**  
Novy Vision  
Novy Flatline  
Novy Salsa

90 cm

**Venting hobs, see p. 34**  
Novy Easy 90 Prestige  
Novy Panorama 90  
Novy Up

**Select a cooker hood of at least 100 cm**  
**Ceiling units, see p. 80**  
Novy Cloud  
Novy Maxi Pureline  
Novy Pureline (Pro) (Compact)  
**Island cooker hoods, see p. 188**  
Novy Phantom Frame & Cable  
Novy Pureline Frame  
Novy Mood  
Novy Flatline

**Select a cooker hood of at least 100 cm**  
**Ceiling units, see p. 80**  
Novy Pureline Pro (Compact)  
Novy Pureline (Compact)  
**Built-in cooker hoods, see p. 126**  
Novy Mini Pureline  
Novy Crystal  
Novy Canopy Essence

**Select a cooker hood of at least 90 cm**  
**Telescopic cooker hoods, see p. 144**  
Novy Fusion  
Novy Fusion Pro  
Novy Telescopic stainless steel  
Novy Telescopic Essence

**Select a cooker hood of at least 90 cm**  
**Wall-mounted cooker hoods, see p. 168**  
Novy Vision  
Novy Flatline  
Novy Salsa

100 cm

**Select a cooker hood of at least 120 cm**  
**Ceiling units, see p. 80**  
Novy Maxi Pureline  
Novy Pureline (Pro) (Compact)  
**Island cooker hoods, see p. 188**  
Novy Phantom Frame & Cable  
Novy Pureline Frame  
Novy Flatline

**Select a cooker hood of at least 120 cm**  
**Ceiling units, see p. 80**  
Novy Pureline Pro (Compact)  
Novy Pureline (Compact)

**Select a cooker hood of at least 100 cm**  
**Telescopic cooker hoods, see p. 144**  
Novy Fusion Pro

**Select a cooker hood of at least 120 cm**  
**Wall-mounted cooker hoods, see p. 168**  
Novy Vision  
Novy Flatline

≤ 120 cm

**Venting hobs, see p. 34**  
Novy Panorama 120

**Select a cooker hood of at least 150 cm**  
**Ceiling units, see p. 80**  
Novy Maxi Pureline

**Select a cooker hood of at least 150 cm**  
**Ceiling units, see p. 80**  
Novy Maxi Pureline

**Select a cooker hood of at least 120 cm**  
**Telescopic cooker hoods, see p. 144**  
Novy Fusion Pro

**Select a cooker hood of at least 120 cm**  
**Wall-mounted cooker hoods, see p. 168**  
Novy Vision  
Novy Flatline

## COOKER HOOD NOVY

# Silent power in the kitchen



The best cooker hood is one that does not attract unnecessary attention. Its inconspicuousness is what turns it into a small secret. Cleanly designed, quiet, and technologically advanced. Tranquillity itself.

- **Silent motor**
- **Extensive soundproofing**
- **Purified indoor air**

## Progressive design

The ultimate package for the best results. That's the Novy cooker hood. Its high-performance technology ensures efficient extraction of cooking fumes and odours. The motor is also equipped with a sound-absorbing system and the finish is the highest quality. Most of all, the design is discreet and beautiful.

## Smart functions



### InTouch

Operate your cooker hood from your hob with wireless RF communication.

### Variable lighting

Customise the lighting: vary between warm and cold tones and dim when you want. The soft on/off button gradually turns the light on or off.



## A rule of thumb for a good ducting

Ducting is crucial for the functioning of a cooker hood with outward air extraction, and in some cases, with recirculation too. The key to optimum efficiency and silent operation is choosing the right materials.

### Here are a few points to consider

#### Short and powerful

A cooker hood loses suction capacity with each additional metre of ducting. That is why you should keep the ducting as short as possible. Generally speaking, flat channel ducting should be no more than 13 metres long and have a diameter of 150 mm. In addition, each 90-degree bend in the ducting is equivalent to an extra 3 metres of ducting, and each 45-degree bend is equivalent to an extra 2 metres.

Example 1:

If a 90° bend and a 45° bend are used, the straight exhaust duct may be a maximum of 8 metres long ( $13 - 3 - 2 = 8$ )



Maximum 13 metres



90° bend: minus 3 metres



45° bend: minus 2 metres

Example 2 (Drawing see p. 31):

If two 90° bends are integrated into the exhaust duct, the straight duct may be max. 7 metres long ( $13 - 3 - 3 = 7$ )




Maximum 13 metres



90° bend: minus 3 metres



90° bend: minus 3 metres

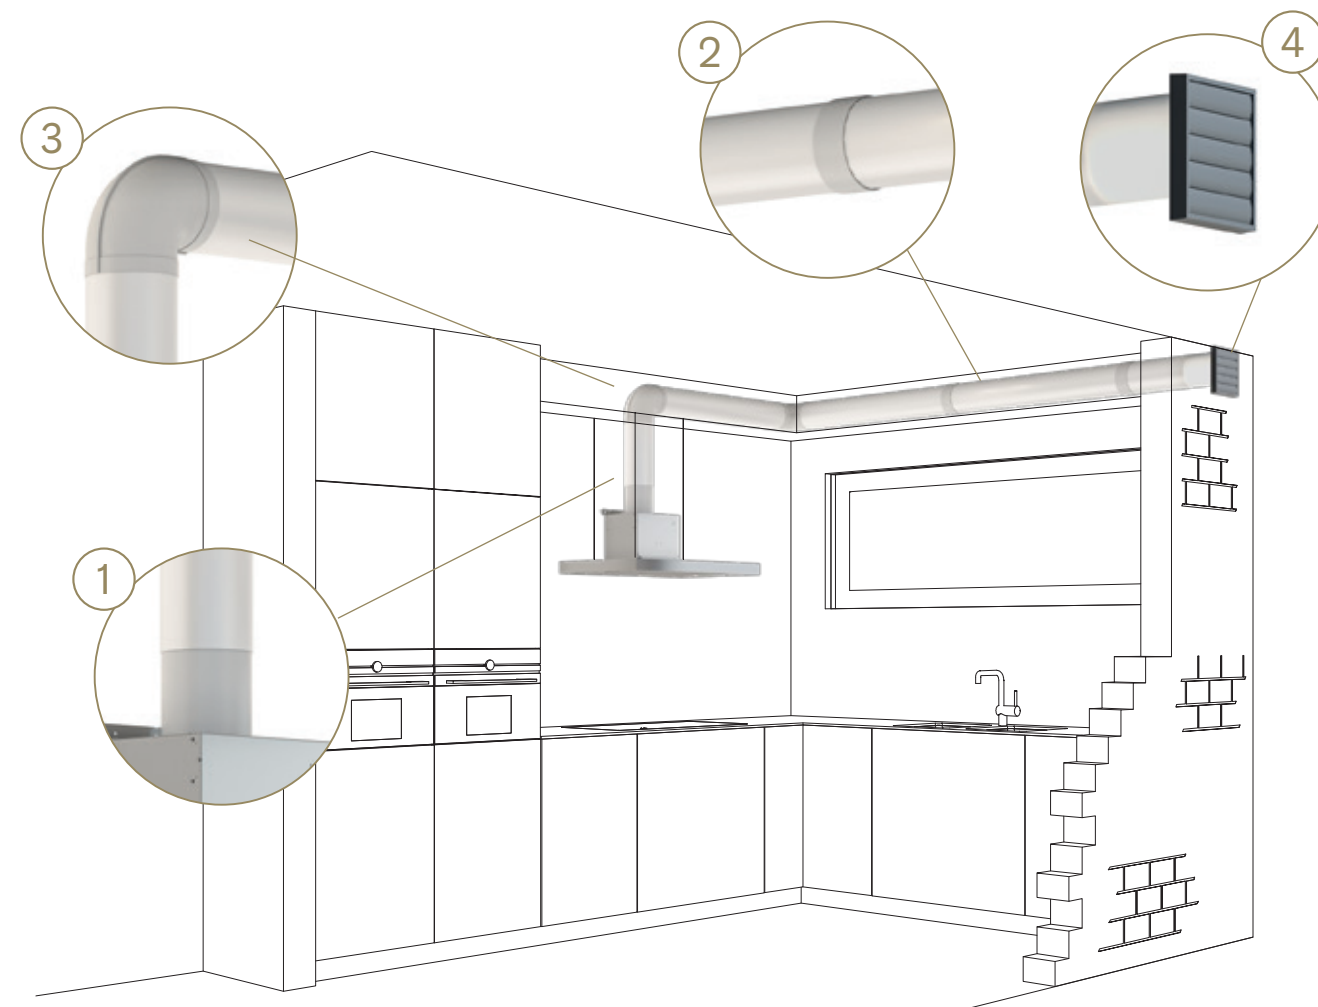

#### The perfect diameter

The ducting should have the same diameter as the connection on the cooker hood. You should limit the use and length of flexible ducting hoses as far as possible and extend hoses as far as possible. (1)

#### Absolutely airtight

Tape or a hose clamp are the perfect tools for making ducting completely airtight. (2)

#### Good air conduction

Corners or bends in ducting impact the conduction of air. Rounded bends promote good air conduction whereas squared-off bends have the opposite effect. (3)

#### An external wall grille is essential

An external grille that allows sufficient air to pass through promotes optimum air conduction. It also means the cooker hood is silent and efficient. (4)

#### Ensure an adequate supply of air



Whether the kitchen is compact or spacious, the quantity of air extracted can never be greater than the quantity of air supplied. In other words, if you do not have an adequate supply of air, the cooker hood will work less efficiently even when it is recirculating air.

# Pure kitchen air

Our **Novy Pure 3.0** technology ensures a pleasant indoor climate. You can count on effective recirculation that keeps even the strongest odours out of your kitchen, without unnecessarily extracting warm, purified air to the outside.

## Easy maintenance

Under normal cooking conditions, the carbon filter must be replaced after 3-5 years or 450/900 hours of cooking (depending on the models). This makes the replacement cost minimal compared to other systems.

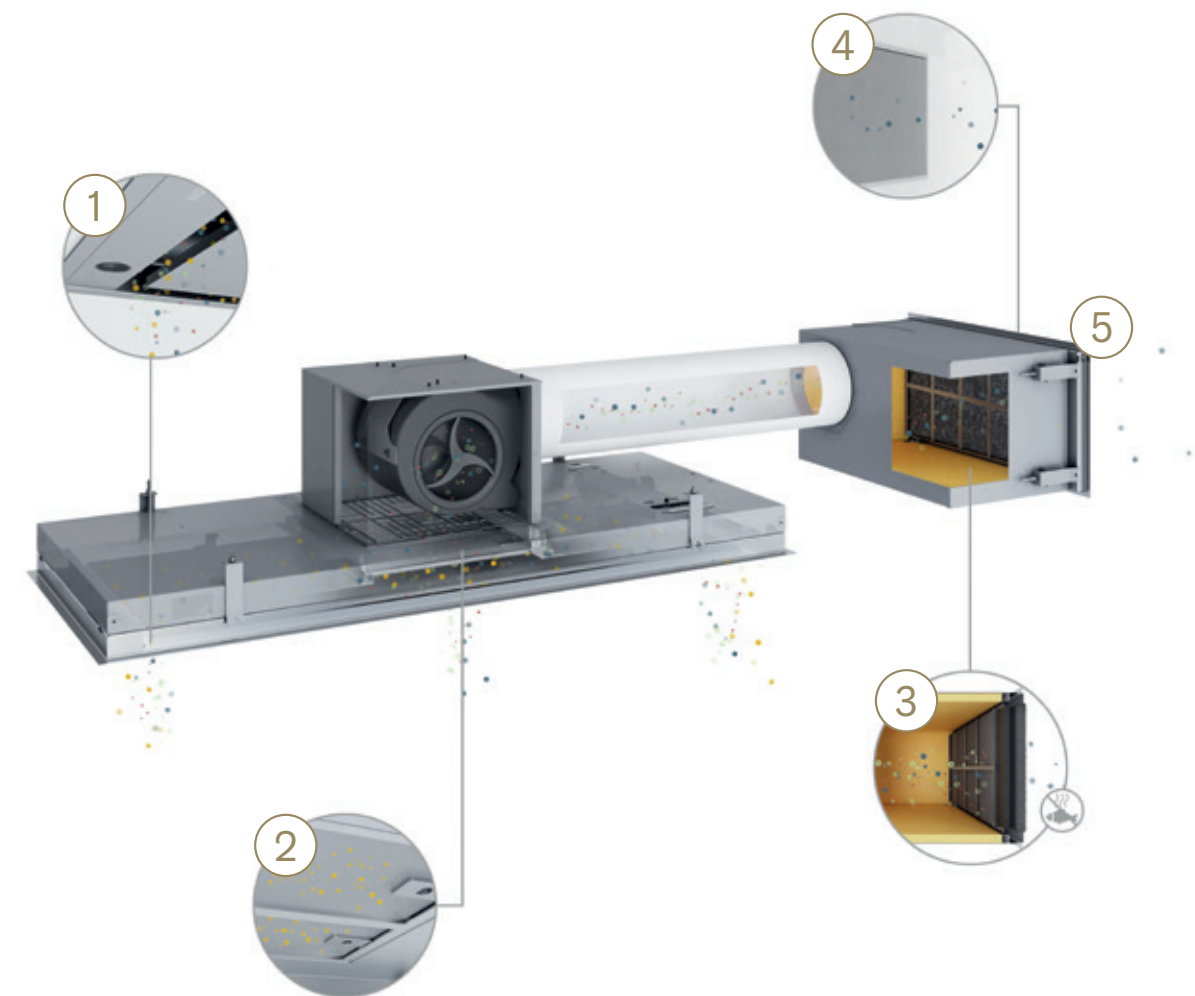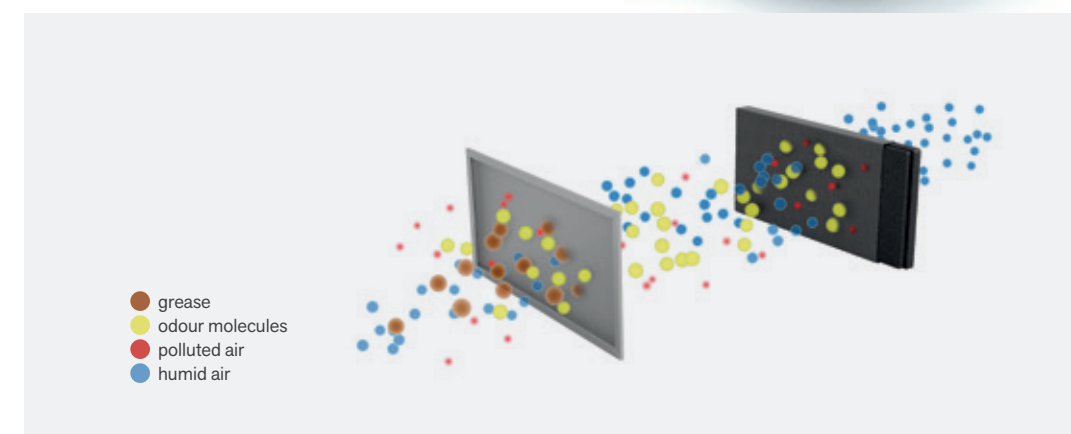

- 1 Cooking vapours are immediately extracted thanks to the **high-performing, silent motor**.
- 2 The efficient **multilayer grease filter** captures all the grease particles that are released during cooking.
- 3 The carbon particles in the **monoblock filter** have a natural coating, exclusively made by Novy. This neutralises the strongest odours - even fish - from 95% up to 100%.
- 4 The **closed, sound-absorbing airflow system** accompanies the hot cooking fumes and prevents moisture from accumulating in the ceiling or cabinet.
- 5 The purified hot air is reintroduced into the kitchen, which guarantees **perfect recirculation** and heat recovery.

**Video**  
Why choose Novy Pure recirculation technology?





# Venting hobs

Novy  
Panorama 90

Novy  
Panorama 120



Novy  
Easy 65



Novy  
Easy 80



Novy  
Easy 90  
Prestige



Novy  
Up



## Cooking profile

Use							
-----	--	--	--	--	--	--	--

## Width (incl. hob) (cm)

Dimensions	88	118	65	80	90	49 (incl. 1 Domino hob) 87 (incl. 2 Domino hobs) 136 (incl. 3 Domino hobs) 174 (incl. 4 Domino hobs)
------------	----	-----	----	----	----	---

## Number of cooking zones

2						
3						
4						
5						
6						
8						

## Adjustable height of the extraction tower (cm)

Height	Freely adjustable (10 - 30)	Freely adjustable (10 - 30)	0	0	0	0 / 10
--------	-----------------------------	-----------------------------	---	---	---	--------

p. 38

p. 44

p. 50

p. 56

p. 64

p. 72

Normal use, basic cooking functions, casseroles/  
low pots/high pots with lids

Normal use, extensive cooking functions,  
casseroles/low pots and high pots with lids

Intensive use, extensive cooking functions,  
casseroles/low pots/high pots





## NOVY DOWNDRAFT EXTRACTION

# Opting for freedom of movement

Space in the kitchen is a luxury. Imagine that you can make optimum use of every surface, without disturbing visual elements. Our worktop extraction system rises to capture fumes immediately at the source, and is concealed back within the surface after use. For those who appreciate both refinement and efficiency.

- Extraction at the source with adjustable heights
- Recirculation or ducted to the outside
- Visually incorporated

## Specialised ventilation tower

The most effective way to capture odours and fumes is to catch them directly as they arise. A ventilation tower with an adjustable height is our advanced solution, so that cooking vapours are extracted at source – directly next to the pans.

## Recirculation or extraction to the outside

There are two options for extracting fumes and odours: a traditional outlet ducted to the outside or recirculation of the purified air.

The latter option is ideal for energy-efficient homes, or in kitchens where it is not possible to extract the air outside. The built-in recirculation box is equipped with a monoblock filter. This slows down the airflow, which ensures the maximum time for unpleasant odours to be absorbed.







NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Panorama 90

- Direct extraction at source, thanks to fixed height: 10, 20 and 30 cm. The height can be adjusted during cooking
- Height of the tower can be freely adjusted via the Novy Connect app or the control on the hob
- Preset extraction function
- Semi-transparent extraction tower disappears invisibly into the hob
- 3 or 4 cooking zones + bridging functions
- Unique and elegant design
- Easy to maintain
- Surface and flush installation possible
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours

Novy Panorama 90 / Venting hobs



38 – 39



**Tower exhaust system**  
Optimal extraction at the height of the pots



**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.



**Recirculation**  
Recirculation is optional.



**Novy Connect**  
Operation and settings possible via smartphone or tablet.



1821



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Pro	88×52	4		4× 200×240	4× 3700	7400	1821 £4,694
Venting induction hob Power	88×52	3		Ø280, 2× 200×240	2× 3000, 1× 1850	6700	1831 £4,214
Venting induction hob Power	88×52	4		Ø185, Ø210 2× 200×240	1× 1400, 2× 3000, 1× 1850	7400	1841 £4,329

	Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)	
						Minimum	Maximum
Extraction	Integrated	Black	81	B	691	37	57

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Panorama 90



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOBS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



DESIGNER  
LIGHTING






DESIGNER  
LIGHTING



INFO

### Technical specifications

	Novy Panorama 90 1821	Novy Panorama 90 1831	Novy Panorama 90 1841
<b>Controls</b>			
Type of controls hob	Slider touch control	Touch control	Touch control
Type of controls cooker hood	Slider touch control / Novy Connect	Touch control / Novy Connect	Touch control / Novy Connect
Control Colour	White	Red	Red
<b>Glass built-in / Finish</b>			
Finish	Round border	Round border	Round border
Surface / Flush	• / •	• / •	• / •
Black opaque glass	•	•	•
<b>Induction hob functions</b>			
Number of power levels	9 + Power + Super Power	9 + Power	9 + Power
Automatic pot detection	•		
Flexzones	• (2 ×)	• (1 ×)	• (1 ×)
Automatic bridge function Flexzone	•		
Manual bridge function Flexzone	•	•	•
Stop & Go	•		
Safety lock hob	•	•	•
Timer on each zone	•	•	•
Count-up timer	•	•	•
Automatic cooking	•		
Keep-warm function (°C)	42, 70 and 94°		
Grill function	•		
<b>Cooking zones</b>			
Cooking zone 1	Left	Left	Left
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	Ø 280 / 2300 (3000)	Ø 185 / 1100 (1400)
Cooking zone 2	Left central	Central	Left central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 2100 (3000)	Ø 210 / 2300 (3000)
Cooking zone 3	Right central	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 1600 (1850)	200×240 / 2100 (3000)
Cooking zone 4	Right		Right
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)		200×240 / 1600 (1850)
			
<b>Cooker hood functions</b>			
Preset extraction function	•	•	•
Manual suction function	•	•	•
Number of speed settings	5+ 3 intensive	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	•	•	•
Cleaning indicator for recirculation filter	•	•	•
Safety lock cooker hood	•	•	•
Extraction height tower (cm)	10, 20, 30	10, 20, 30	10, 20, 30
Extraction height tower freely adjustable	•	•	•
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards	2 up, 2 downwards
<b>Dimensions (mm)</b>			
Dimensions device (W×D×H)	880×520×65	880×520×65	880×520×65
Dimensions cooker hood (W×D×H)	818×165×760–840	818×165×760–840	818×165×760–840
Exhaust opening diameter	89×222	89×222	89×222
Exhaust position	Central under (rear/front)	Central under (rear/front)	Central under (rear/front)
Opening	See p. 256-257	See p. 256-257	See p. 256-257
<b>Technical characteristics</b>			
Integrated motor	•	•	•
Weight cooker hood / motor casing (kg)	50.1	50.1	50.1
Electrical connection value cooker hood (W)	250	250	250
Electrical connection value induction hob (W)	7400	6700	7400
Supply voltage	2 power supplies	2 power supplies	2 power supplies
Cooker hood	230 V	230 V	230 V
Induction hob	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N


### Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
1821	Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65
1831	Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65
1841	Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawing

Novy Panorama 90
1821 / 1831 / 1841

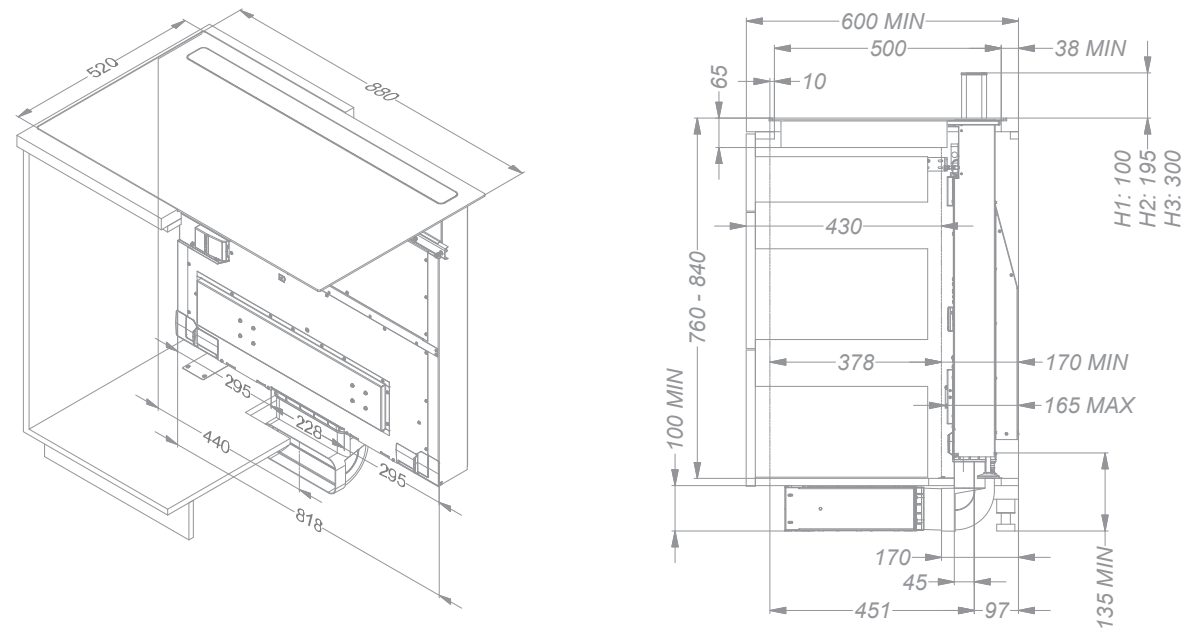


Comment  
Built-in lower cabinet from 90 cm without post and with removable back plate.  
If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.

Video  
Installation video



Accessories

	Reference	Price/pc	1821	1831	1841
<b>Miscellaneous</b>					
Grease filter left	1821.521	£89	•	•	•
Grease filter right	1821.537	£89	•	•	•
Side profiles kit for hob	1700.092	£69	•	•	•
Grill plate (240×415 mm)	1700.093	£309	•		
Teppanyaki plate (240×415 mm)	1700.095	£309	•		
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•		
Installation kit for cabinet	1821.400	£159	•	•	•
Input / output module	990.036	£204	•	•	•

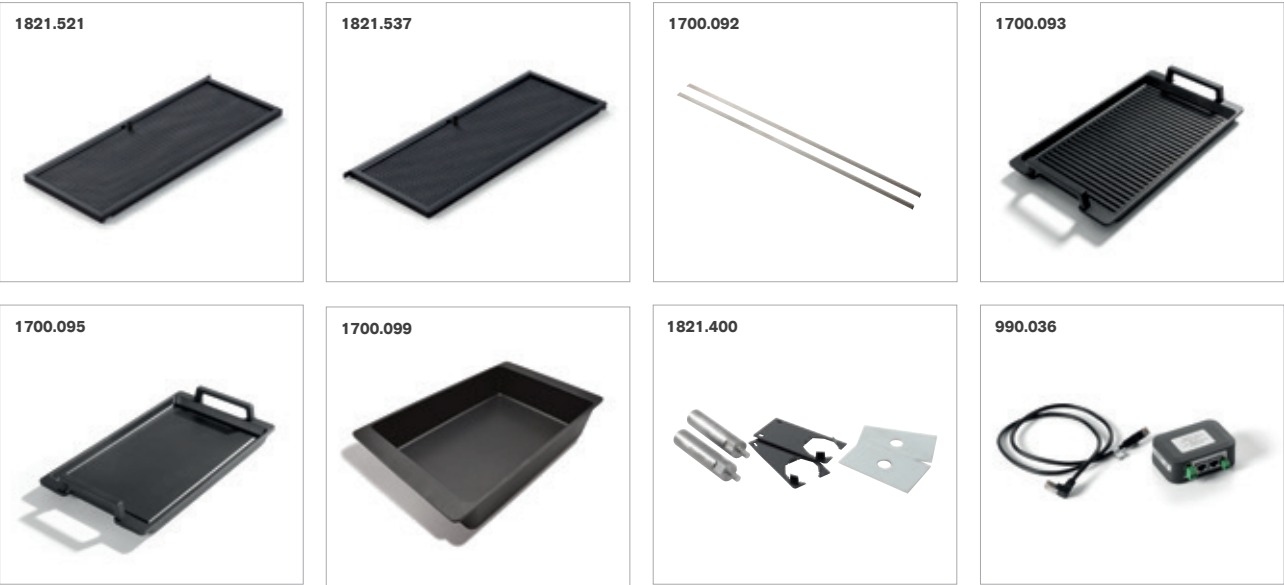

Accessories

	Reference	Price/pc	1821	1831	1841
<b>Recirculation with exhaust box</b>					
Built-in box (98 mm high) with monoblock filter (818×289×98 mm)					
White (≈RAL 9003)	7921.400	£459	•	•	•
Mineral Black (≈RAL 9005)	7922.400	£459	•	•	•
Grey (≈RAL 7030)	7923.400	£459	•	•	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•	•	•
Technical details recirculationboxes see p. 220-221					



**Video**  
Video recirculation



Drawer of 40 cm possible with a cabinet of 60 cm



Drainage of the outside



Recirculation





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Panorama 120

- Direct extraction at source, thanks to the adjustable height: 10, 20 and 30 cm. The height can be adjusted during cooking
- Height of the tower can be freely adjusted via the Novy Connect app or the control on the hob
- Preset extraction function
- Semi-transparent extraction tower disappears invisibly into the hob
- 4 or 5 cooking zones + bridging functions
- Unique and elegant design
- Easy to maintain
- Surface and flush installation possible
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours

Novy Panorama 120 / Venting hobs



44 – 45



**Tower exhaust system**  
Optimal extraction at the height of the pots.



**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.



**Recirculation**  
Recirculation is optional.



**Novy Connect**  
Operation and settings possible via smartphone or tablet.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Pro	118×52	4	Ø280, Ø230, 2× 200×240	4× 3000	7400 *	42110	£5,089
Venting induction hob Pro	118×52	5	Ø280, 4× 200×240	5× 3000	10400 *	42120	£5,299

	Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)	
						Minimum	Maximum
Extraction	Integrated	Black	110	B	1009	35	61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

\* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video  
Novy Panorama 120



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOBS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOBS





DESIGNER  
LIGHTING



INFO

## Technical specifications

	Novy Panorama 120 42110	Novy Panorama 120 42120
<b>Controls</b>		
Type of controls hob	Slider touch control	Slider touch control
Type of controls cooker hood	Slider touch control / Novy Connect	Slider touch control / Novy Connect
Control Colour	White	White
<b>Glass built-in / Finish</b>		
Finish	Round border	Round border
Surface / Flush	▪ / ▪	▪ / ▪
Black opaque glass	▪	▪
<b>Induction hob functions</b>		
Number of power levels	9 + Power + Super Power	9 + Power + Super Power
Automatic pot detection	▪	▪
Flexzones	▪ (1 ×)	▪ (2 ×)
Automatic bridge function Flexzone	▪	▪
Manual bridge function Flexzone	▪	▪
Stop & Go	▪	▪
Safety lock hob	▪	▪
Timer on each zone	▪	▪
Independent cooking timer	▪	▪
Automatic cooking	▪	▪
Keep-warm function (°C)	70°	70°
Count-up timer	▪	▪
Grill function	▪	▪
<b>Cooking zones</b>		
Cooking zone 1	Left	Left
Dimensions (mm) / Power (Boost) W	Ø 280 / 2300 (3000)	200×240/ 2100 (3000)
Cooking zone 2	Left central	Left central
Dimensions (mm) / Power (Boost) W	Ø 230 / 2300 (3000)	200×240/ 2100 (3000)
Cooking zone 3	Right central	Central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	Ø 280 / 2300 (3000)
Cooking zone 4	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	200×240/ 2100 (3000)
Cooking zone 5		Right
Dimensions (mm) / Power (Boost) W		200×240/ 2100 (3000)
		
<b>Cooker hood functions</b>		
Preset extraction function	▪	▪
Manual suction function	▪	▪
Number of speed settings	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	▪	▪
Cleaning indicator for recirculation filter	▪	▪
Safety lock cooker hood	▪	▪
Extraction height tower (cm)	10, 20, 30	10, 20, 30
Extraction height tower freely adjustable	▪	▪
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards
<b>Dimensions (mm)</b>		
Dimensions device (W×D×H)	1180×520×65	1180×520×65
Dimensions cooker hood (W×D×H)	1100×162×760–840	1100×162×760–840
Exhaust opening diameter	89×222	89×222
Exhaust position	2×Central under (rear/front)	2×Central under (rear/front)
Opening	See p. 256-257	See p. 256-257
<b>Technical characteristics</b>		
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	56.0	56.4
Electrical connection value cooker hood (W)	450	450
Electrical connection value induction hob (W)	7400, 5750 - 1400	10400, 7400 - 1400
Supply voltage	2 power supplies	2 power supplies
Cooker hood	230 V	230 V
Induction hob	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N / 3N


## Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
Type			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
42110	Integrated motor	1530	237 / 28	650 / 191	1009 / 416	22 / 35	48 / 61	56 / 70
42120	Integrated motor	1530	237 / 28	650 / 191	1009 / 416	22 / 35	48 / 61	56 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

## Technical drawing

<b>Novy Panorama 120</b>
42110 / 42120

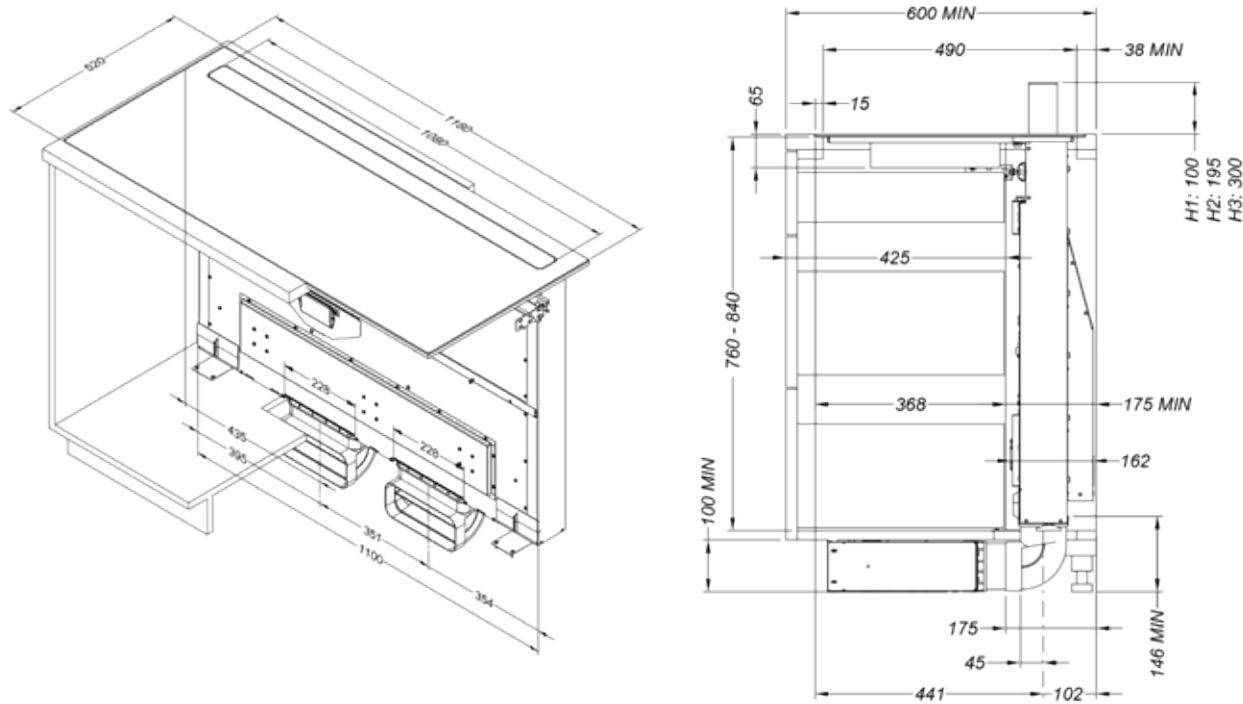

Comment  
Built-in lower cabinet from 120 cm without post and with removable back plate.  
If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.

**Video**  
Installation video





Accessories

	Reference	Price/pc	42110	42120
<b>Miscellaneous</b>				
Grease filter left	42120.521	£104	•	•
Grease filter right	42120.535	£104	•	•
Side profiles kit for hob	1700.092	£69	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•
Installation kit for cabinet	1821.400	£159	•	•
Input / output module	990.036	£204	•	•



42120

Accessories

	Reference	Price/pc	42110	42120
<b>Recirculation with exhaust box</b>				
Built-in box (98 mm high) with monoblock filter (1100×290×98 mm)				
White (≈RAL 9003)	7941.400	£699	•	•
Mineral Black (≈RAL 9005)	7942.400	£699	•	•
Grey (≈RAL 7030)	7943.400	£699	•	•
Monoblock replacement filter (set)	98.001	£469	•	•
Technical details recirculationboxes see p. 220-221				



Drawer of 40 cm possible with a cabinet of 60 cm



Drainage of the outside



Recirculation





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Easy 65

(Available from Q2 2025)

- Compact 65 cm downdraft for optimal space usage, perfect for installation in 60 cm kitchen cabinets
- Optimised airflow due to elegant finish
- Easy maintenance
- 4 cooking zones and useful functions
- Surface and flush installation possible
- Monoblock filter with a life span of up to 450 cooking hours (1881)

Novy Easy 65 / Venting hobs

50 – 51



**Integrated extraction**  
Powerful extraction by integrated cooker hood.



**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.



**Recirculation**  
Recirculation (1881)



1871



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob with extraction	65×52	4	2× 210×220, 2× Ø175	2× 3000, 2× 2100	7568 *	1871	£2,599

Venting induction hob - recirculation model (incl. Monoblock filter)	65×52	4	2× 210×220, 2× Ø175	2× 3000, 2× 2100	7568 *	1881	£2,649
--	-------	---	---------------------	------------------	--------	------	--------

				Sound level during normal use in dB(A) (re 1 pW)			
Motor	Colour	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum	
Extraction	Integrated	Black	A+	584	48	68	

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

\* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video  
Novy Easy 65



ABOUT  
NOVY

COOKER  
HOOD  
GUIDELINES

VENTING  
HOBS

CEILING  
UNITS

BUILT-IN  
COOKER  
HOODS

TELESCOPIC  
COOKER  
HOODS

WALL-  
MOUNTED  
COOKER  
HOODS

ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES

HOBS

DESIGNER  
LIGHTING

INFO

Technical specifications


	Novy Easy 65 1871 (extraction)	Novy Easy 65 1881 (recirculating)
<b>Controls</b>		
Type of controls	Slider touch control	Slider touch control
Control Colour	Red	Red
<b>Glass built-in / Finish</b>		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
<b>Induction hob functions</b>		
Number of power levels	9 + Power	9 + Power
Automatic pot detection	•	•
Flexzones	• (1 ×)	• (1 ×)
Automatic bridge function Flexzone	•	•
Manual bridge function Flexzone	•	•
Stop & Go	•	•
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Automatic cooking	•	•
Keep-warm function (°C)	70°	70°
Grill function	•	•
<b>Cooking zones</b>		
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) W	210×220 / 2100 (3000)	210×220 / 2100 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	210×220 / 2100 (3000)	210×220 / 2100 (3000)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) W	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) W	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)
<div>   </div>		
<b>Cooker hood functions</b>		
Number of speed settings	9 + Power	9 + Power
Automatic speed control	•	•
Run-on timer (min.)	10	30
Cleaning indicator for grease filter	•	•
Clearing indicator for recirculation filter		•
Collection container for cleaning	2 –fold	2 –fold
<b>Dimensions (mm)</b>		
Dimensions appliance (W×D×H)	650×520×248	650×520×248
Exhaust opening diameter	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 256-257	See p. 256-257
<b>Technical characteristics</b>		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	17,9	18,5
Electrical connection value (W)	7568, 5918 – 1568	7568, 5918 – 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1871	Integrated motor	750	196 / 44	488 / 282	584 / 478	36 / 48	56 / 68	60 / 72
1881	Integrated motor	750	126 / -	428 / -	445 / -	36 / 48	52 / 64	53 / 65

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

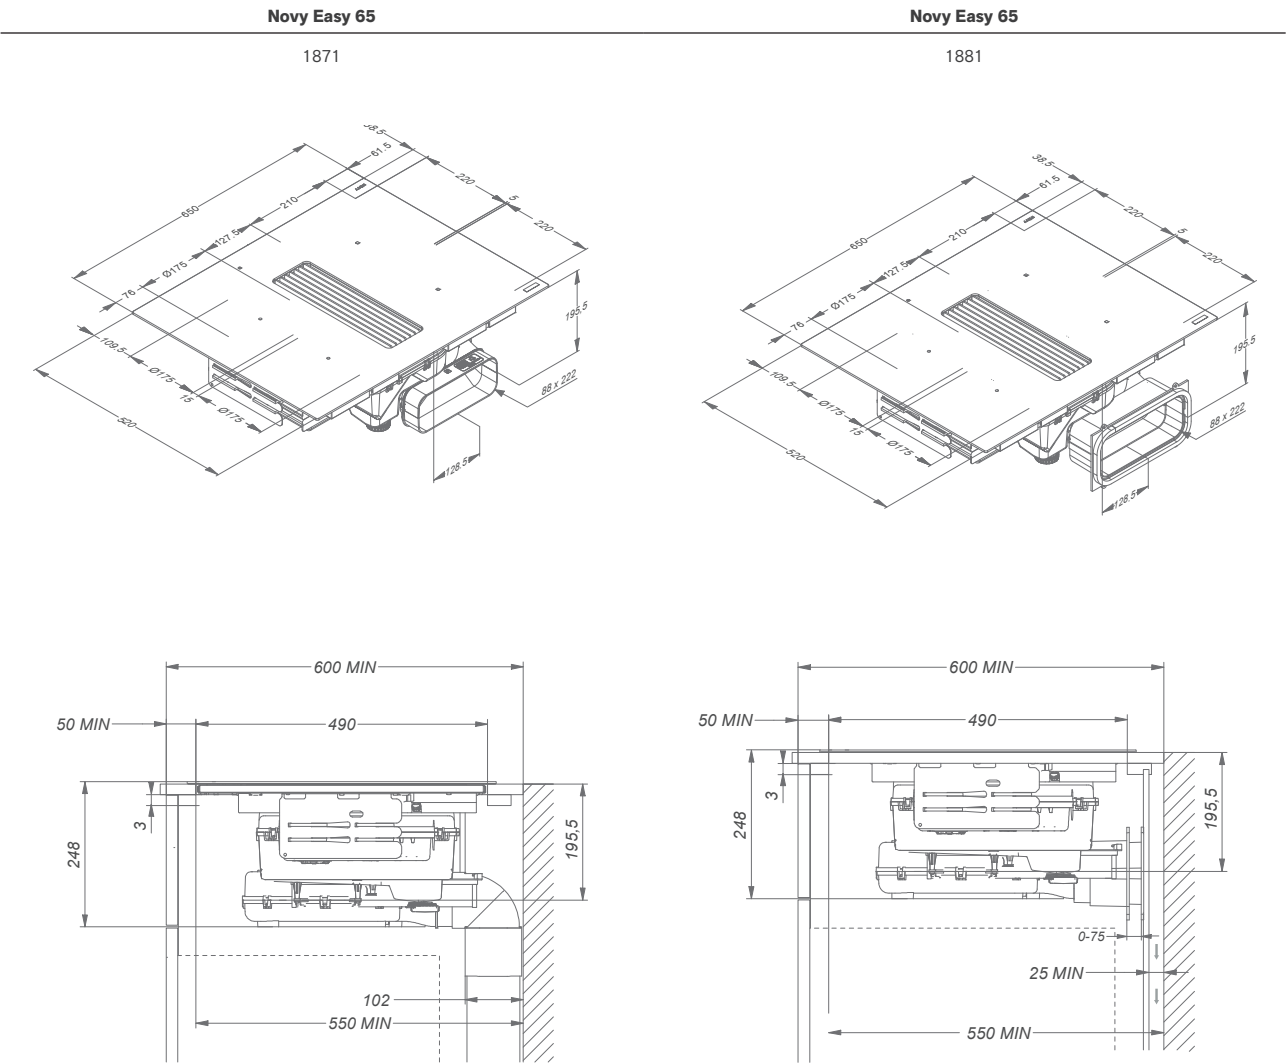

Video  
 Installation video



Accessories

	Reference	Price/pc	1871	1881
<b>Miscellaneous</b>				
Grease filter	99.005	£204	•	•
Side profiles kit for hob	1700.092	£69	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•




Accessories

	Reference	Price/pc	1871	1881
<b>Recirculation</b>				
Monoblock replacement filter	98.005	£149	•	
Installation kit with monoblock filter*	1861.820	£169		•

\* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404



Technical drawing

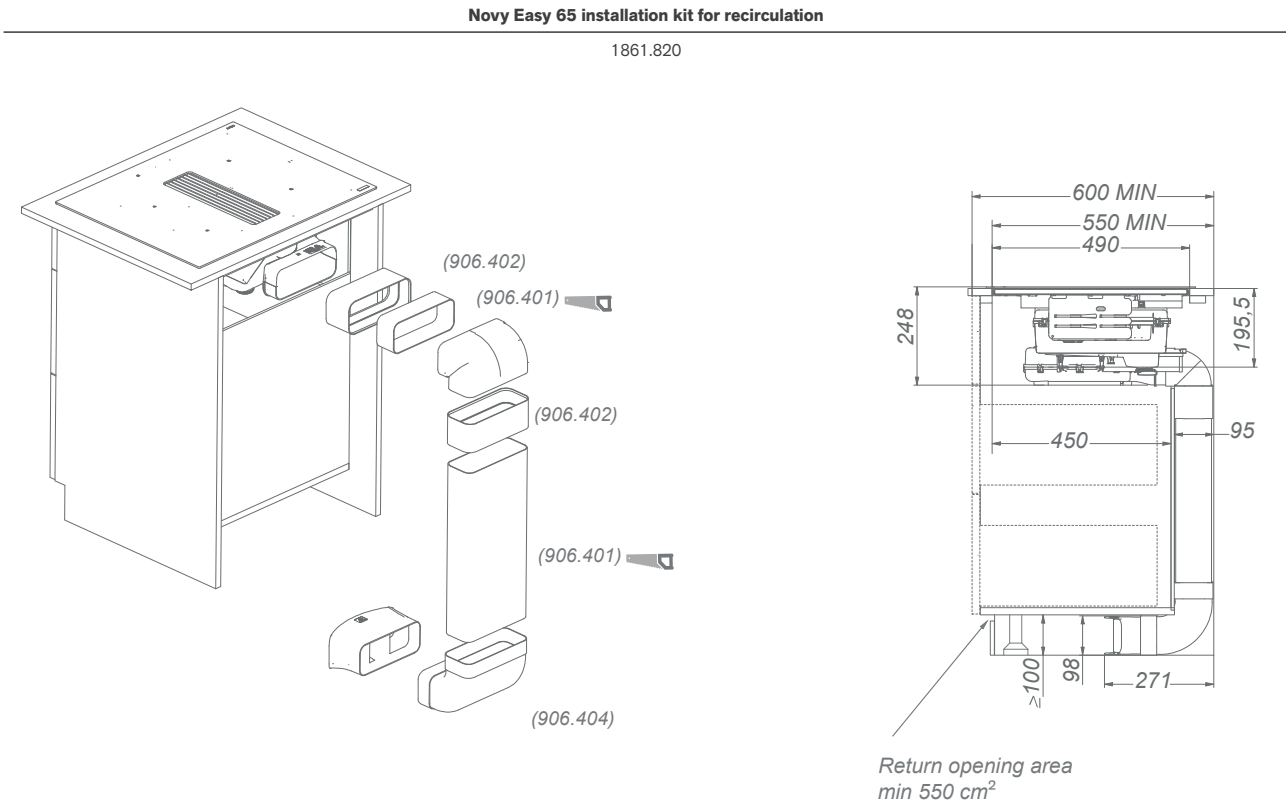





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Easy 80

- Optimised airflow due to elegant finish
- Easy maintenance
- Extra large cooking surface
- 4 cooking zones and useful functions
- Surface and flush installation possible
- Monoblock filter with a life span of up to 450 cooking hours (1861)



**Integrated extraction**  
Powerful extraction by integrated cooker hood.



**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.



**Recirculation**  
Recirculation (1861)



1851



	Outside dimensions (WxD) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob with extraction	80x52	4	4x 240x210	4x 3000	7568 *	1851	£2,969
Venting induction hob - recirculation model (incl. Monoblock filter)	80x52	4	4x 240x210	4x 3000	7568 *	1861	£3,179

				Sound level during normal use in dB(A) (re 1 pW)			
Motor	Colour	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum	
Extraction	Integrated	Black	A+++	610	47	66	


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

\* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video  
Novy Easy 80



### Technical specifications


	Novy Easy 80 1851 (extraction)	Novy Easy 80 1861 (recirculating)
<b>Controls</b>		
Type of controls	Slider touch control	Slider touch control
Control Colour	Red	Red
<b>Glass built-in / Finish</b>		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
<b>Induction hob functions</b>		
Number of power levels	9 + Power	9 + Power
Automatic pot detection	•	•
Flexzones	• (2×)	• (2×)
Automatic bridge function Flexzone	•	•
Manual bridge function Flexzone	•	•
Stop & Go	•	•
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Automatic cooking	•	•
Keep-warm function (°C)	70°	70°
Grill function	•	•
<b>Cooking zones</b>		
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
		
<b>Cooker hood functions</b>		
Number of speed settings	9 + Power	9 + Power
Automatic speed control	•	•
Run-on timer (min.)	10	30
Cleaning indicator for grease filter	•	•
Clearing indicator for recirculation filter		•
Collection container for cleaning	2 –fold	2 –fold
<b>Dimensions (mm)</b>		
Dimensions appliance (W×D×H)	800×520×215	800×520×215
Exhaust opening diameter	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 256-257	See p. 256-257
<b>Technical characteristics</b>		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	18,3	18,9
Electrical connection value (W)	7568, 5918 – 1568	7568, 5918 – 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V

### Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1851	Integrated motor	750	220 / 46	520 / 263	610 / 452	34 / 47	54 / 66	58 / 70
1861	Integrated motor	750	172 / -	472 / -	537 / -	32 / 44	53 / 65	55 / 67

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawing

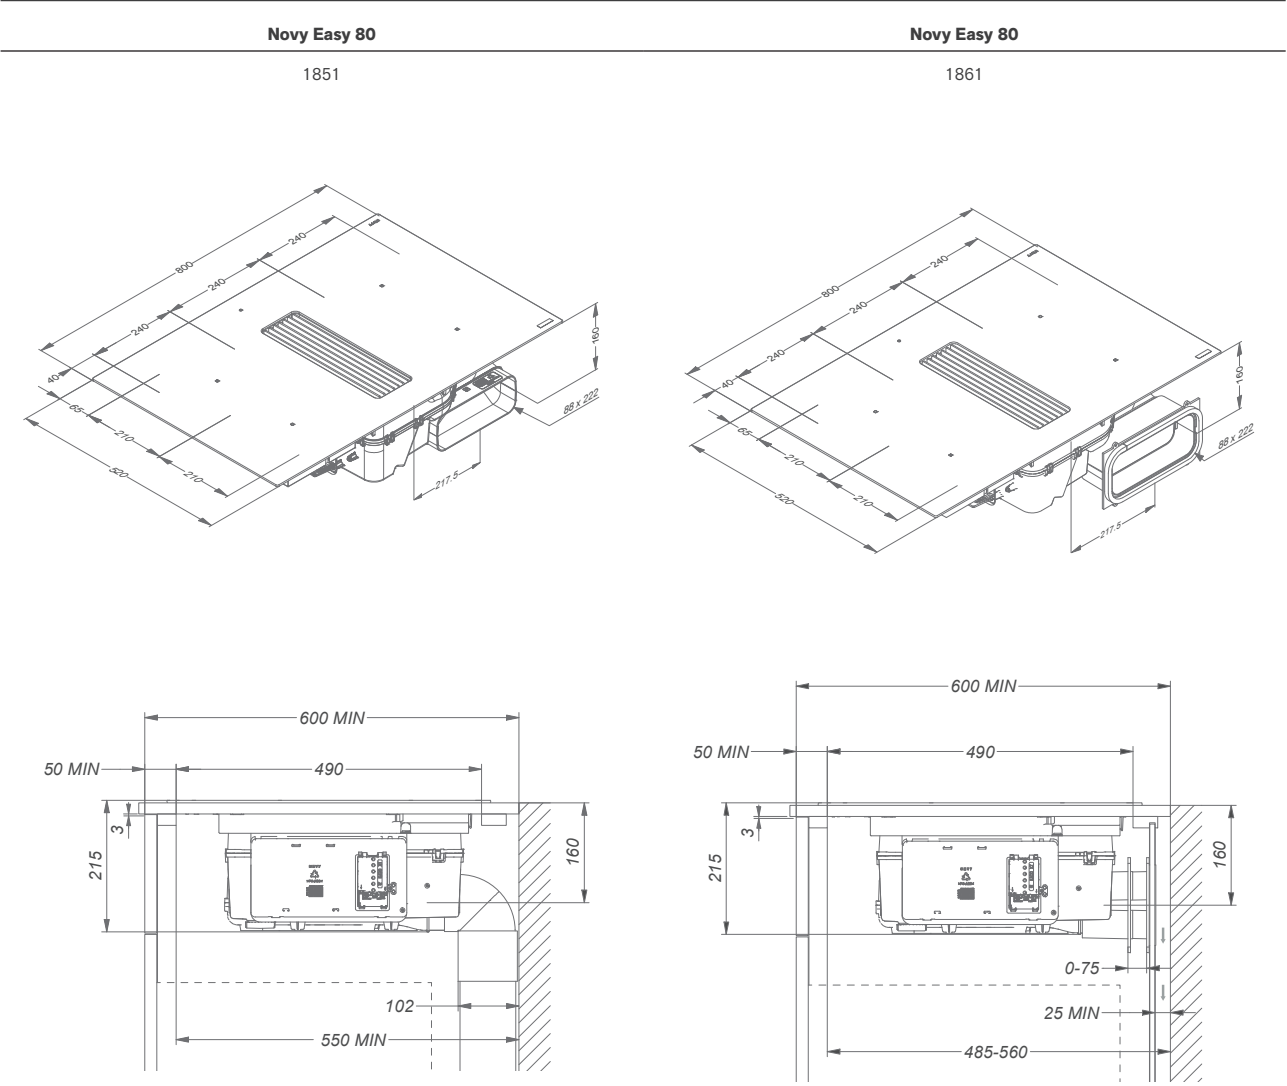

Video  
Installation video





Accessories

	Reference	Price/pc	1851	1861
<b>Miscellaneous</b>				
Grease filter	99.003	£204	•	•
Side profiles kit for hob	1700.092	£69	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•



Accessories


	Reference	Price/pc	1851	1861
<b>Recirculation</b>				
Monoblock replacement filter	98.002	£149	•	•
Installation kit with monoblock filter*	1861.820	£169	•	•

\* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404



Technical drawing

<b>Novy Easy installation kit for recirculation</b>
1861.820

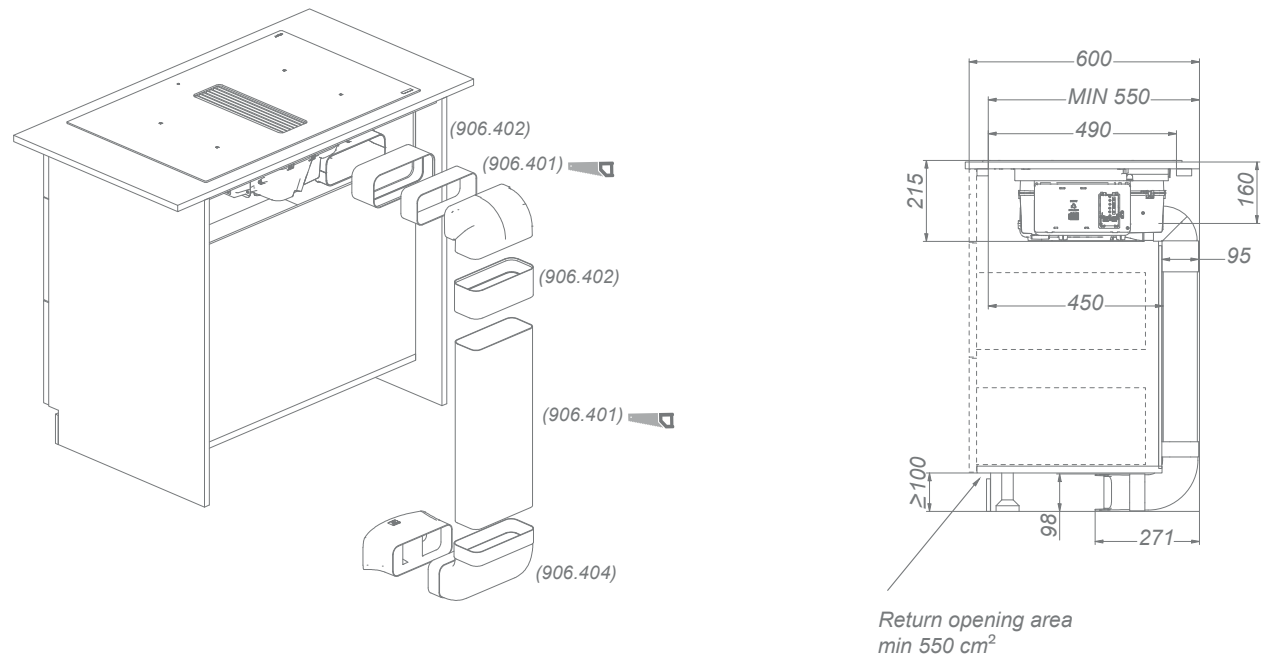







NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Easy 90 Prestige

- Elegant black powder-coated aluminium rotary control knobs
- One reference for recirculation and duct out
- Extra large cooking surface
- Optimised airflow due to elegant finish
- 4 cooking zones and useful functions
- Surface and flush installation possible
- Recirculation Monoblock filter with a life span of up to 450 cooking hours
- Easy maintenance

Novy Easy 90 Prestige / Venting hobs



64 – 65



**Integrated extraction**  
Powerful extraction by integrated cooker hood.



**Flexzone**  
Coupling of 2 cooking zones for large pots and pans.



**Recirculation**  
Recirculation as standard.



**Direct extraction**  
Adjustable.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob with extraction	90×52	4	4× 240×210	4× 3000	7568 *	1866	£4.799

				Sound level during normal use in dB(A) (re 1 pW)			
	Motor	Colour	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Recirculation mode (default)	Integrated	Black	10	-	537	44	65
Duct out mode	Integrated	Black	10	A+++	610	47	66

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

\* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video  
Novy Easy 90 Prestige



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOBS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOBS




DESIGNER  
LIGHTING



INFO

### Technical specifications


Novy Easy 90 Prestige 1866	
<b>Controls</b>	
Type of controls	Rotary control knob
Colour and material knobs	Black powder-coated aluminium
Control Colour	Red
<b>Glass built-in / Finish</b>	
Finish	Round border
Surface / Flush	• / •
Black opaque glass	•
<b>Induction hob functions</b>	
Number of power levels	9 + Power
Automatic pot detection	•
Flexzones	• (2×)
Manual bridge function Flexzone	•
Safety lock hob	•
Automatic cooking	•
Keep-warm function (°C)	42°
<b>Cooking zones</b>	
Cooking zone 1	Front left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 2	Rear left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 3	Right front
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 4	Back right
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
	
<b>Cooker hood functions</b>	
Number of speed settings	9 + Power
Automatic speed control	•
Run-on timer recirculation mode (min.)	30 (default setting)
Run-on timer duct out mode (min.)	10
Cleaning indicator for grease filter	•
Clearing indicator for recirculation filter	•
Collection container for cleaning	2 –fold
<b>Dimensions (mm)</b>	
Dimensions appliance (W×D×H)	900×520×215
Exhaust opening diameter	89×222
Exhaust position	Rear left / left downwards
Opening (B×D)	See p. 256-257
<b>Technical characteristics</b>	
Integrated motor	•
Weight cooker hood / motor casing (kg)	24,3
Electrical connection value (W)	7568, 5918 - 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V

### Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1866	Recirculation mode (default)	750	172 / -	472 / -	537 / -	32 / 44	53 / 65	55 / 67
1866	Duct out mode	750	220 / 46	520 / 263	610 / 452	34 / 47	54 / 66	58 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawing

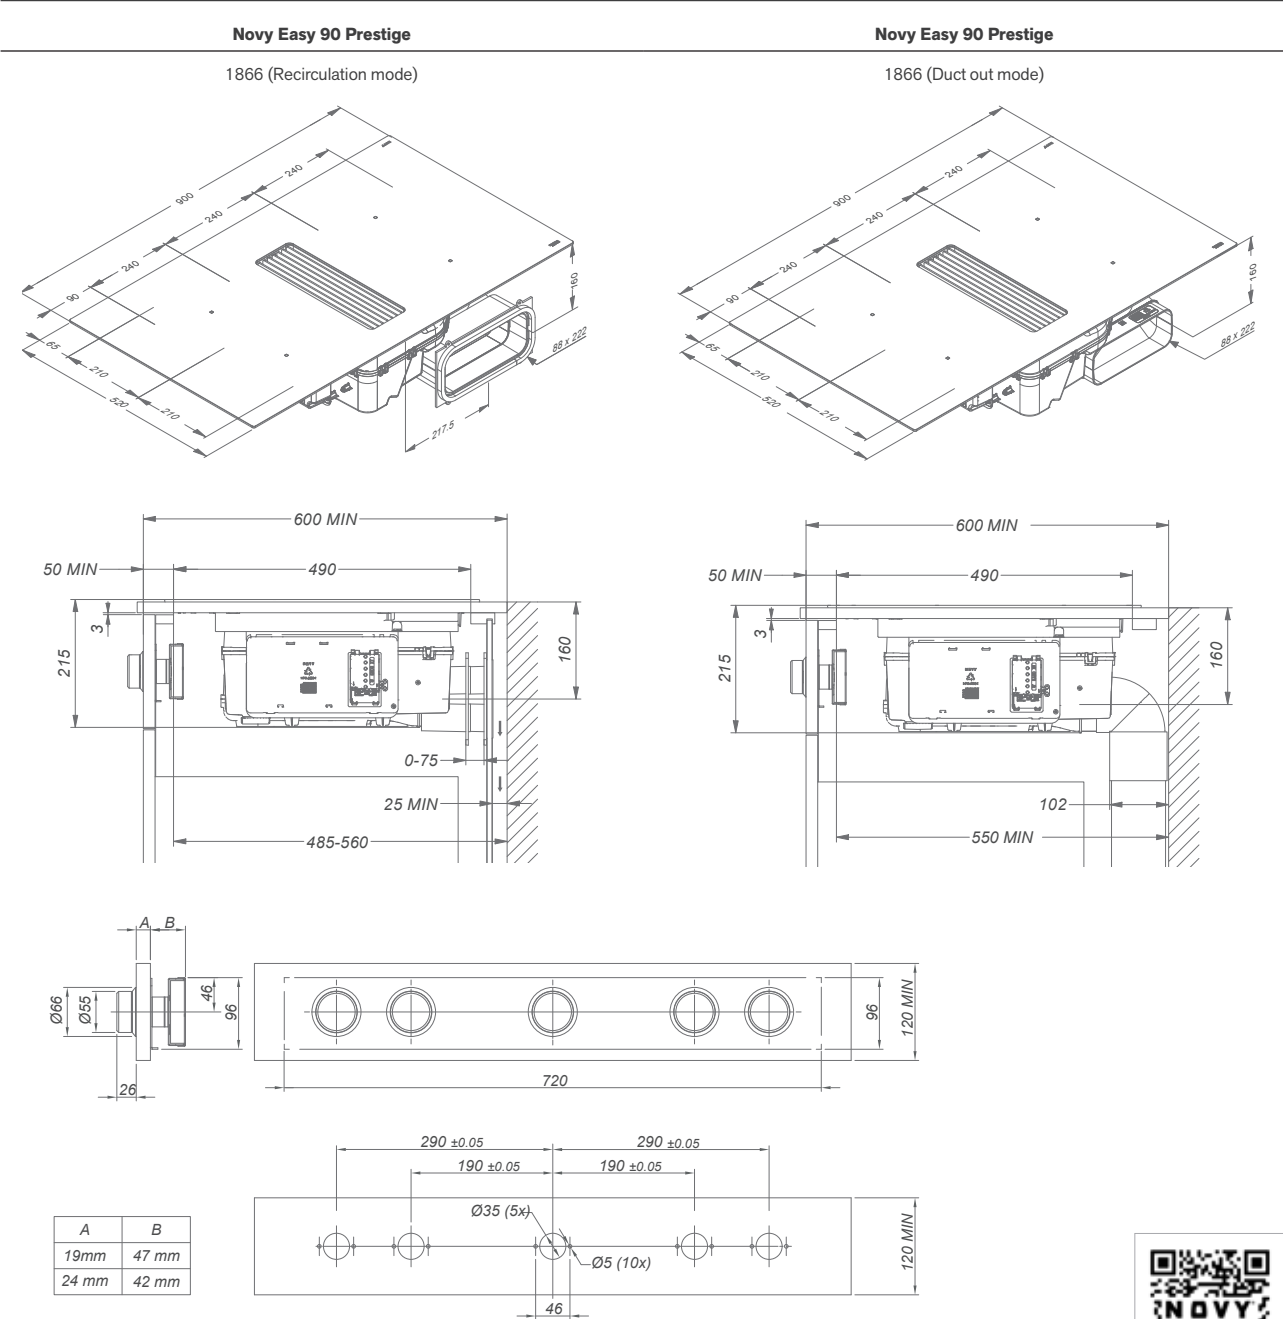

\* The front panel of the cabinet must be removable to mount the rotary controls.  
\*\* This kit with rotary controls is only suitable for use with a 19 or 24 mm thick removable front panel.

**Video**  
Installation video





Accessories

	Reference	Price/pc	1866
<b>Miscellaneous</b>			
Grease filter	99.003	£204	•
Side profiles kit for hob	1700.092	£69	•
Grill plate (240×415 mm)	1700.093	£309	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•




Accessories

	Reference	Price/pc	1866
<b>Recirculation</b>			
Monoblock replacement filter	98.002	£149	•
Installation kit with monoblock filter*	1861.820	£169	•
* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404			



Technical drawing

Novy Easy installation kit for recirculation
1861.820

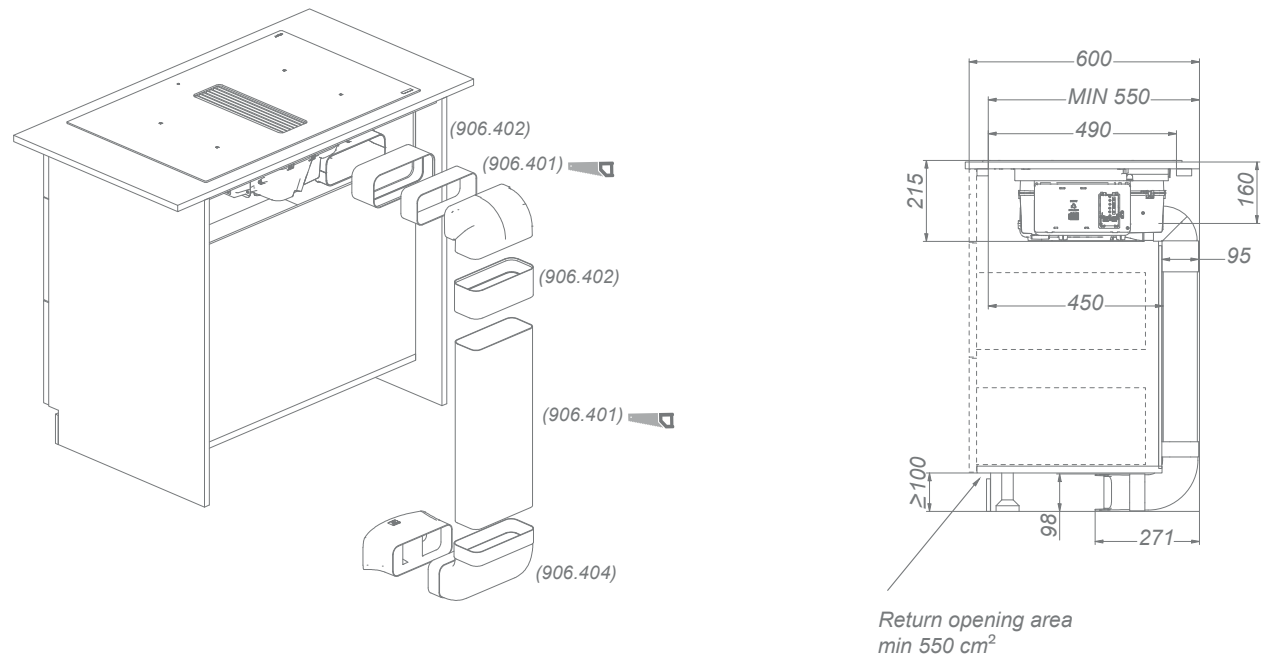









# Novy Up

- Direct extraction of cooking vapours thanks to the adjustable flap and central extraction tower
- Manual operation of the extraction tower
- Adjustable flap with adjustable height for directional extraction
- Extraction tower disappears in between the domino hobs
- Choice of various cooking setups
- Surface and flush installation possible
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Tower exhaust systeem**  
Optimal extraction at the height of the pots.



**Flexzone**  
Manual bridge function of 2 cooking zones. (except 40002)



**Recirculation**  
Recirculation is optional.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Power	49×52	2		2× 240×200	3000 + 1850	3700	40000 £2,769
Venting induction hob Comfort	87×52	4		2× ø175, 2× ø210	2x 3000 + 2x 1400	7400	40002 £3,609
Venting induction hob Power	87×52	4		4× 240×200	2x 3000 + 2x 1850	7400	40004 £3,844
Venting induction hob Power + Teppan	87×52	4		2× 240×200	3000 + 1850 + 2800	6500	40006 £5,534
Venting induction hob Power + Wok	87×52	3		2× 240×200	3000 + 1850 + 3200	6900	40008 £5,419



					Sound level during normal use in dB(A) (re 1 pW)		
	Motor	Colour	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	Black	11	B	537	55	62




Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Up



Technical specifications

	Novy Up 40000	Novy Up 40002
<b>Controls</b>		
Type of controls	Touch control	Touch control
Control colour	Red	Red
<b>Glass built-in / Finish</b>		
Finish	Round border	Round border
Surface / flush	• / •	• / •
Black opaque glass	•	•
<b>Induction hob functions</b>		
Number of power levels	9 + Power	9 + Power
Flexzones	• (1 ×)	
Manual bridge function Flexzone	•	
Stop & Go		
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function		
<b>Cooking zones</b>		
Number of cooking zones	2	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 1600 (1850)	175 / 1100 (1400)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 2100 (3000)	210 / 2300 (3000)
Cooking zone 3		Front right
Dimensions (mm) / Power (BOOST) (W)		175 / 1100 (1400)
Cooking zone 4		Rear right
Dimensions (mm) / Power (BOOST) (W)		210 / 2300 (3000)
		
<b>Cooker hood functions</b>		
Number of speed settings	3 + power	3 + power
Run-on timer (min)	10-30 (default setting)	10-30 (default setting)
Clearing indicator for grease filter	•	•
Clearing indicator for recirculation filter	•	•
Venting valve for aspiration direction	•	•
Extraction height tower (cm)	0, 10	0, 10
Collection container for cleaning	Fixed	Fixed
Tower operation	Manual	Manual
<b>Dimensions (mm)</b>		
Dimensions appliance (WxDxH)(mm)	491×520×228	872×520×228
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Rear left /left downwards	Rear left / left downwards
Opening (WxD)	See p. 256-257	See p. 256-257
Maximum thickness worktop (mm)	25	
<b>Technical characteristics</b>		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	24	29
Electrical connection value cooker hood (W)	155	155
Electrical connection value induction hob (W)	3700	7400
Supply voltage	2 power supplies	3 power supplies
Cooker hood	230 V	230 V
Induction hob	230 V - 1N	230 V - 1N / 2N

Novy Up 40004	Novy Up 40006	Novy Up 40008
Touch control	Touch control + slider	Touch control + slider
Red	Red	Red
Round border	Round border	Round border
• / •	• / •	• / •
•	•	•
9 + Power	9 + Power	9 + Power
• (2×)	• (1 ×)	• (1 ×)
•	•	•
•	• (teppan)	• (wok)
•	• (teppan)	• (wok)
•	•	•
•	•	•
	• (teppan)	• (wok)
4	4	3
Front left	Front left	Front left
240×200 / 1600 (1850)	240×200 / 1600 (1850)	240×200 / 1600 (1850)
Rear left	Rear left	Rear left
240×200 / 2100 (3000)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Front right	Front right	Front right
240×200 / 1600 (1850)	1400	360 / 2000 (3200)
Rear right	Rear right	
240×200 / 2100 (3000)	1400	
		
3 + power	3 + power	3 + power
10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
•	•	•
•	•	•
•	•	•
0, 10	0, 10	0, 10
Fixed	Fixed	Fixed
Manual	Manual	Manual
872×520×228	872×520×228	872×520×228
89×222	89×222	89×222
Rear left / left downwards	Rear left /left downwards	Rear left / left downwards
See p. 256-257	See p. 256-257	See p. 256-257
•	•	•
30	33,6	33,6
155	155	155
7400	6500	6900
3 power supplies	3 power supplies	3 power supplies
230 V	230 V	230 V
230 V - 1N / 2N	230 V - 1N / 2N	230 V - 1N / 2N





Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
40000	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40002	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40004	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40006	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40008	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

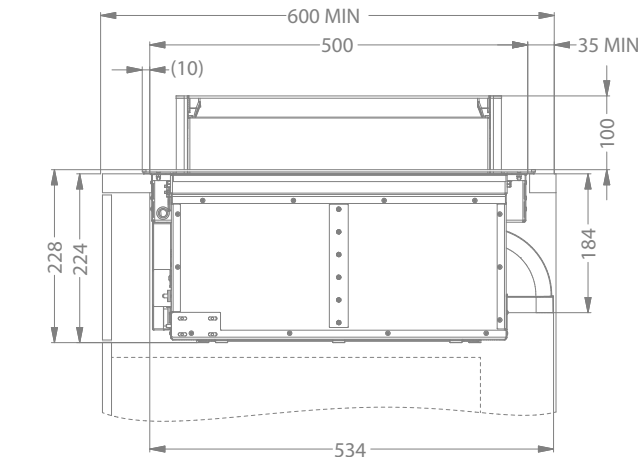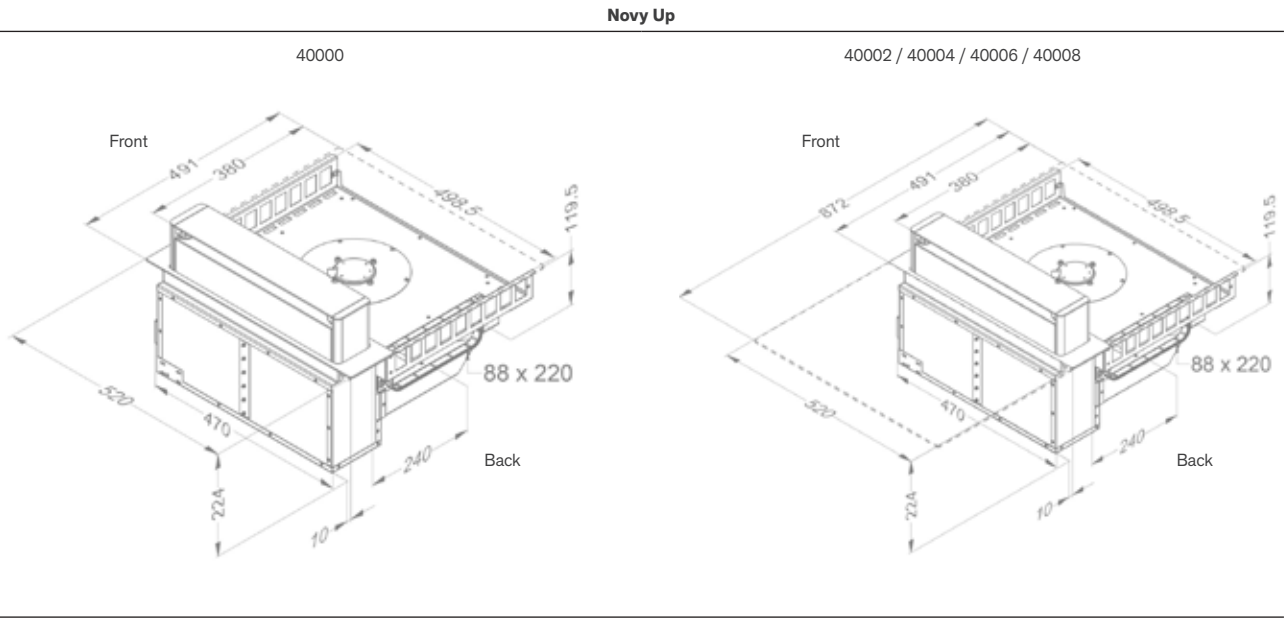

Video  
Installation video



Installation options

	Type	Cooking zone	Total width (mm)
	40000	2	491
	40002 to 40008	4	872
	40000 + 40002 to 40008	6	1364
	40002 to 40008 + 40002 to 40008	8	1745

\* Wok or Teppan Yaki should always be positionned to the right.



Accessories

	Reference	Price/pc	40000-8
<b>Miscellaneous</b>			
Grease filter	99.002	£124	•
Cabelset windowsswitch	990.037	£79	•
<b>Recirculation with exhaust box</b>			
Built-in box (98 mm high) with monoblock filter (818×289×98 mm)			
White (≈RAL 9003)	7921.400	£459	•
Mineral Black (≈RAL 9005)	7922.400	£459	•
Grey (≈RAL 7030)	7923.400	£459	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•
Installation kit with monoblock filter* (818×289×98 mm) (at a minimum cabinet depth of 60 cm)			
White (≈RAL 9003)	1811.821	£549	•
Mineral Black (≈RAL 9005)	1811.822	£549	•
Grey (≈RAL 7030)	1811.823	£549	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•

\* Installation kit contains built-in box with monoblock filter (818×289×98 mm) incl. references 906.401, 906.402 (2x) & 906.404

Technical details recirculationboxes see p. 220-221







# Ceiling units


Novy Cloud



Novy Pureline Pro Compact



Novy Pureline Compact

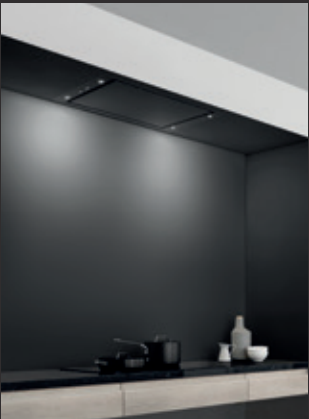

Novy Pureline Pro



Novy Pureline (with lighting)



Novy Pureline (without lighting)



Novy Maxi Pureline



Width

90 cm		■	■	■	■	■	
110 cm	■						
120 cm		■	■	■	■	■	
150 cm							■

Colour

White	■	■	■	■	■	■	■
Stainless steel		■	■	■	■	■	■
Mineral Black	■	■	■	■			

Motor

Integrated	■	■	■	■	■	■	
From a distance (inside)				Optional	Optional	Optional	
Not included					■	■	■

Exhaust

To the outside		■	■	■	■	■	■
Recirculation	■	Optional	Optional	Optional	Optional	Optional	Optional

p. 86

p. 90

p. 96

p. 102

p. 108

p. 114

p. 120

# Step-by-step plan

The following 5-step plan helps you find your way in choosing the right Novy ceiling unit.

## Step 1 Width of the ceiling unit

For a good result the cooker hood must be at least the full width of the hob. Our ceiling units are available in sizes 90, 110, 120 and 150 cm. The following combinations are recommended for the ceiling units (directive):

Width hob	Width ceiling unit	Max. distance between cooker hood and hob
≤ 80 cm <sup>1</sup>	min. 90 cm	160 cm
81 - 109 cm	min. 110 cm	160 cm
110 - 120 cm	min. 120 cm	160 cm
> 120 cm	min. 150 cm	160 cm

<sup>1</sup> For installation in fully suspended ceilings, we recommend a ceiling unit of at least 120 cm for hobs 80 and 90 cm wide.

## Step 2 LED lighting

### With LED lights

The ceiling unit is equipped with dual LED lighting or a LED strip. The light intensity and colour temperature can be adjusted to your wishes.

### Without LED lights

For a minimalistic design. To these ceiling units you can connect external lighting (max. 300 W), which can be operated through the cooker hood, remote control or InTouch technology (not dimmable).

## Step 3 Recirculation or exhaust to the outside

### Recirculation

If extraction to the outside is not an option, you can choose recirculation instead. For ceiling units it is possible to choose

- 2 types of built-in boxes, each in 3 colours with monoblock filter.
- A basic kit. The basic kit contains a monoblock filter. The monoblock filter is placed directly behind the grease filter. The exhaust grill to let the filtered air back into the kitchen must be provided by you.

The Novy Cloud has recirculation as a standard.

With a cooker hood with recirculation, there must be a minimum of ventilation in the room where the cooker hood has been installed. Ventilation can be provided by the overall ventilation in the house or by opening a window and/or door.

### Duct out

Novy offers a wide range of installation accessories on p. 226.

A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).

## Step 4 Ceiling unit installation options

The Novy Pureline ceiling unit can be installed in 2 ways:

- flush-mounted in the ceiling
- in an alcove or a self-constructed chimney


The Novy Cloud ceiling unit can be mounted directly to the ceiling.

The maximum installation height (between the hob and the underside of the ceiling unit) is 160 cm.

### Installation in an alcove or self-constructed chimney




Cooking vapours do not rise straight up, instead they fan out over an angle of between 10° and 15°. For an efficient operation it is important that the whole construction in which the ceiling unit is installed is at least the same width and depth as the hob. Create an overlap of approximately 30 cm around the ceiling unit to prevent cooking vapours from escaping. In addition, edging of 5 to 10 cm high will ensure that fewer vapours can escape.

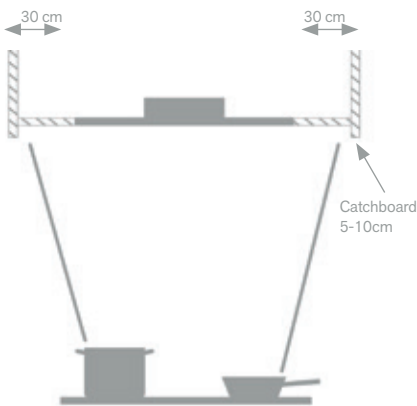

### Installation in the ceiling



In this type of installation the ceiling unit is installed in a suspended ceiling and usually covers the entire kitchen. Because the unit is flush with the ceiling, vapours cannot rise higher than the unit itself and are captured along the edges.

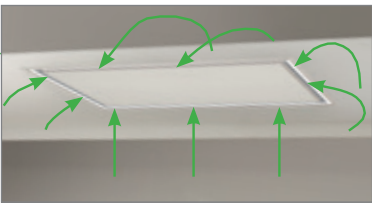

### Mounting onto the ceiling




The Novy Cloud ceiling unit only needs to be screwed to the ceiling and does not require any opening in the ceiling. Never before has it been this easy to install a cooker hood. Make sure, however, that your ceiling is sufficiently strong.

### Construction of the suspension structure

On the long sides of the Novy Pureline ceiling unit there are mounting clamps that hold the cooker hood in the cut-out opening. For this, the material and thickness must be 18-35 mm.

Never mount directly in the plasterboard, always provide reinforcement (in wood, on the side or by means of a frame) to which the mounting clamps can be clamped.

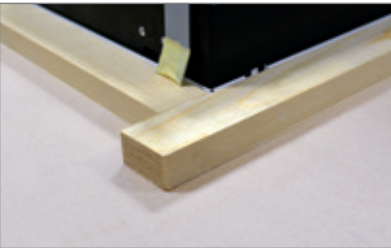



### Adapter for flat duct with limited built-in height

If the built-in depth is limited, it is possible to remove the Cubic motor from the ceiling unit. In this situation, an optional adapter can be ordered. The adaptor is placed directly on the ceiling unit and connected to a flat rectangular duct. The motor is then installed in a different location indoors. Please note that the entrance to the motor is round. With adapter 6830.053 the built-in height can be limited to 17,3 cm and with 830.053 to 18,5 cm. Always mount the adapter 6830.053 and 6930.050 in combination with the kit to install remote motor inside (800.991).

6830.053	Adaptor for Novy Pureline. exhaust direction can be turned to the right, left, front or rear	£159
6930.050	Adaptor for Novy Pureline Pro. exhaust direction can be turned to the right, left, front or rear	£264
830.053	Adaptor for Novy Maxi Pureline (order 2x). Exhaust direction 1x left and 1x right	£159
800.991	Kit to install the remote motor inside (Novy Pureline Pro & Pureline)	£159



## Step 5

### Type of motor

#### Cloud ceiling unit recirculation as standard

This ceiling unit is equipped with recirculation as standard and needs only to be screwed to the ceiling. It is not necessary create an opening in the ceiling.

#### Ceiling unit motor not included






Models without a motor are combined with an interior motor, wall-mounted motor or flat roof motor

#### Ceiling unit with compact motor

The ceiling unit, including the compact motor, has a built-in height of only 19.5 cm. The exhaust can be turned to the right, left, front or rear. This motor cannot be removed.

#### Ceiling unit with a Cubic motor

The integrated Cubic motor offers the necessary flexibility, because the exhaust can be rotated in all directions (right, left, front, rear or above).  
With an optional kit (800.991), the Cubic motor can also be removed and placed elsewhere in the house. A 5 m cable (included) connects the ceiling unit with the motor.  
If required, this cable can also be extended (optional). This extension cable is connected to the existing cable and has a length of 5 m.

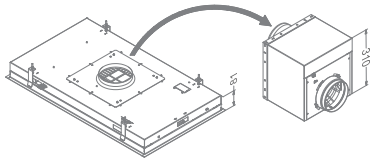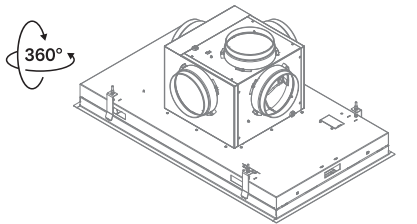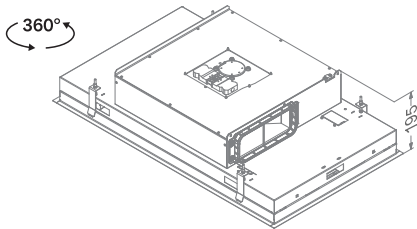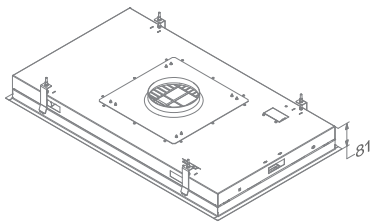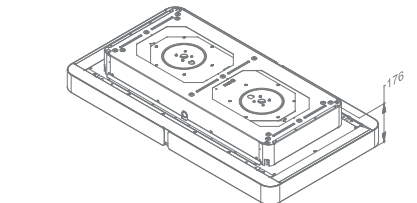

## Overview of ceiling units

### Step 2

### Step 1

		With light		Without light	
Novy Pureline 90 cm	Stainless steel	Compact motor, with LED strip	6910		
	Stainless steel	Compact motor, with LED spots	6810		
	Stainless steel	Cubic motor ,with LED strip	6930		
	Stainless steel	Cubic motor, with LED spots	6830	Cubic motor	6833
	Stainless steel	Motor not included, with LED spots	6835	Motor not included	6838
	White	Compact motor, with LED strip	6911		
	White	Compact motor, with LED spots	6811		
	White	Cubic motor, with LED strip	6931		
	White	Cubic motor, with LED spots	6831	Cubic motor	6834
	White	Motor not included, with LED spots	6836	Motor not included	6839
	Mineral Black	Compact motor with LED strip	6912		
	Mineral Black	Compact motor, with LED spots	6812		
	Mineral Black	Cubic motor with LED strip	6932		

Novy Pureline 120 cm	Stainless steel	Compact motor, with LED strip	6920		
	Stainless steel	Compact motor, with LED spots	6820		
	Stainless steel	Cubic motor, with LED strip	6940		
	Stainless steel	Cubic motor, with LED spots	6840	Cubic motor	6843
	Stainless steel	Motor not included, with LED spots	6845	Motor not included	6848
	White	Compact motor, with LED strip	6921		
	White	Compact motor, with LED spots	6821		
	White	Cubic motor, with LED strip	6941		
	White	Cubic motor, with LED spots	6841	Cubic motor	6844
	White	Motor not included, with LED spots	6846	Motor not included	6849
	Mineral Black	Compact motor, with LED strip	6922		
	Mineral Black	Compact motor, with LED spots	6822		
	Mineral Black	Cubic motor, with LED strip	6942		

Novy Maxi Pureline 150 cm	Stainless steel			Motor not included	855
	White			Motor not included	856

Novy Cloud 110 cm	White	Motor, recirculation	230		
	Mineral Black	Motor, recirculation	232		



NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Cloud

- Fine lines for pure design
- Adjustable light intensity and colour temperature from 2,700 K to 5,000 K
- Recirculation as standard for additional planning options (carbon filter with a life span of up to 900 cooking hours)
- Limited installation height of only 17.6 cm
- Extended lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and mood mode)
- Operation and settings possible via smartphone or tablet (Novy Connect), as well as via remote control



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Standard with recirculation.



**Novy Connect**  
Operation and settings possible via smartphone or tablet.



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
110	Integrated	White	504	49	68	230	£3,014
	Integrated	Mineral Black	504	49	68	232	£3,014

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Cloud





Technical specifications


<div><div></div><div><b>Novy Cloud</b> 230 white / 232 Mineral Black</div></div>	
<b>Functions</b>	
Controls	Remote control (black) / Novy Connect
Number of speed settings	4
With noise reduction	•
Recirculation	• (monoblock)
InTouch function for hobs	•
Auto-Stop, automatic switch-off after 3 hours	•
Run-on timer (min.)	30
Cleaning indicator for grease filter	•
Replacement indicator for recirculation filter	•
<b>Lighting</b>	
Type of lighting (W)	LED strip (33) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)
<b>Technical characteristics</b>	
Colour	230 white (≈RAL 9003) 232 Mineral Black (≈RAL 9005)
Integrated motor	• (not removable)
Weight cooker hood (kg)	35.5
Mains voltage (V) / Electrical connection value (W)	230 / 175
<b>Dimensions</b>	
Dimensions (W×D×H) (mm)	1100×600×176
Exhaust position	Left and right
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
230	Integrated	1010	187	272	343	504	37 / 49	42 / 54	48 / 60	56 / 68
232	motor									

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

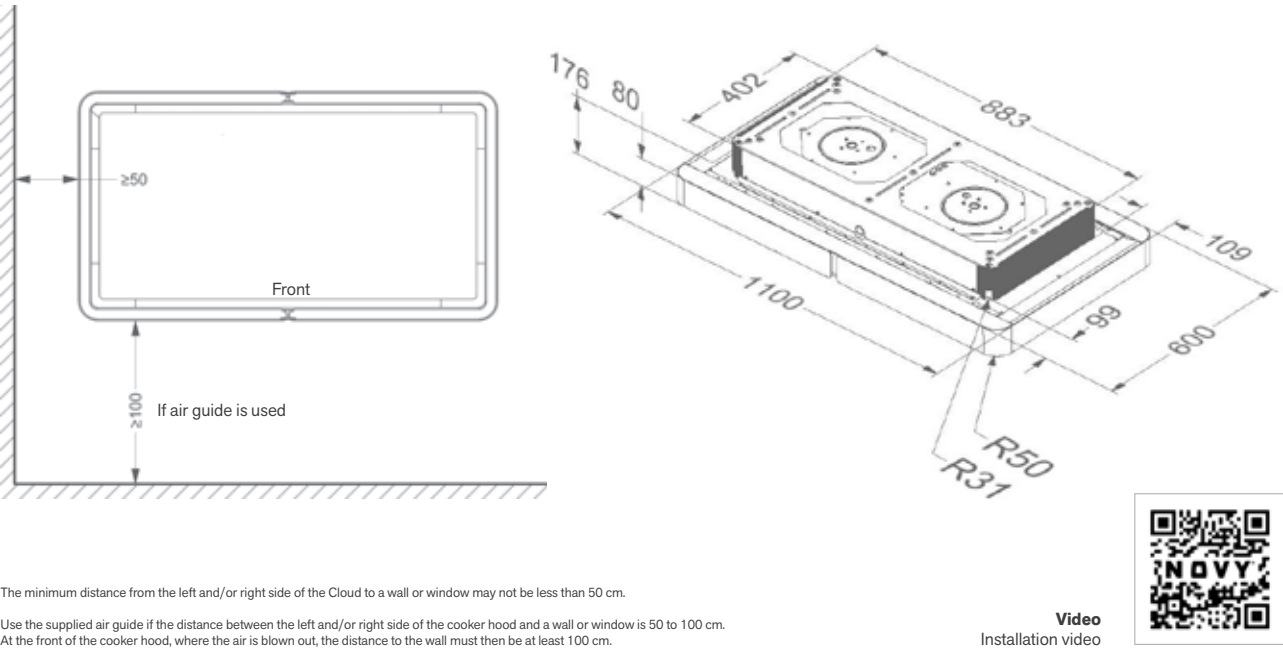

The minimum distance from the left and/or right side of the Cloud to a wall or window may not be less than 50 cm.

Use the supplied air guide if the distance between the left and/or right side of the cooker hood and a wall or window is 50 to 100 cm. At the front of the cooker hood, where the air is blown out, the distance to the wall must then be at least 100 cm.

Accessories

	Reference	Price/pc	230	232
<b>Miscellaneous</b>				
Monoblock replacement filters (set per 4)	230.060	£404	•	•
Grease filter (replacement) (2 pcs to order)	230.020	£159	•	•
Remote control (white)	840.029	£104	•	•
Mounting frame Mineral Black	230.520	£124	•	
Mounting frame white	230.510	£124		•

**230+230.500**

**230.060**

**230.020**

**230.520**

**840.029**



# Novy Pureline Pro Compact

- A built-in height of only 19.5 cm thanks to a compact motor
- Flexible installation possibilities due to rotating motor in several directions (left, right, front or rear)
- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (5,000 K)
- Ultra slim led strip with extensive lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and ambient mode)
- Automatic speed control with the Novy Sense sensor for detection of cooking vapours and odour (optional)
- Operation and settings possible via smartphone or tablet (Novy Connect), as well as via remote control
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.

**InTouch**  
Standard with function for controlling the cooker hood from the hob.

**Recirculation**  
Recirculation is optional.

**Novy Connect**  
Operation and settings possible via smartphone or tablet.

In option

Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, compact motor	Stainless steel	B	618	41	62	6910	£2,409
	Integrated, compact motor	White	B	618	41	62	6911	£2,409
	Integrated, compact motor	Mineral Black	B	618	41	62	6912	£2,409
120	Integrated, compact motor	Stainless steel	B	619	41	62	6920	£2,639
	Integrated, compact motor	White	B	619	41	62	6921	£2,639
	Integrated, compact motor	Mineral Black	B	619	41	62	6922	£2,639

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Pureline Pro Compact





Technical specifications



Functions		
Controls	Remote control (black) + Novy Connect	Remote control (black) + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Sense sensor	Optional (6910.070)	Optional (6910.070)
With noise reduction	•	•
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Lighting		
Type of lighting (W)	LED (20) / dimmable	LED (21) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics		
Colour	6910 stainless steel 6911 white (≈RAL 9003) 6912 Mineral Black (≈RAL 9005)	6920 stainless steel 6921 white (≈RAL 9003) 6922 Mineral Black (≈RAL 9005)
Integrated motor	• (not removable)	• (not removable)
Weight cooker hood (kg)	29	32
Mains voltage (V) / Electrical connection value (W)	230 / 210	230 / 210


Dimensions		
Dimensions (W×D×H) (mm)	868×508×195	1168×508×195
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6910, 6911, 6912	Integrated motor	750	257 / 52	474 / 192	550 / 272	618 / 478	29 / 41	44 / 57	48 / 62	50 / 63
6920, 6921, 6922	Integrated motor	750	251 / 50	468 / 187	548 / 267	619 / 506	28 / 41	45 / 57	50 / 62	51 / 63


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

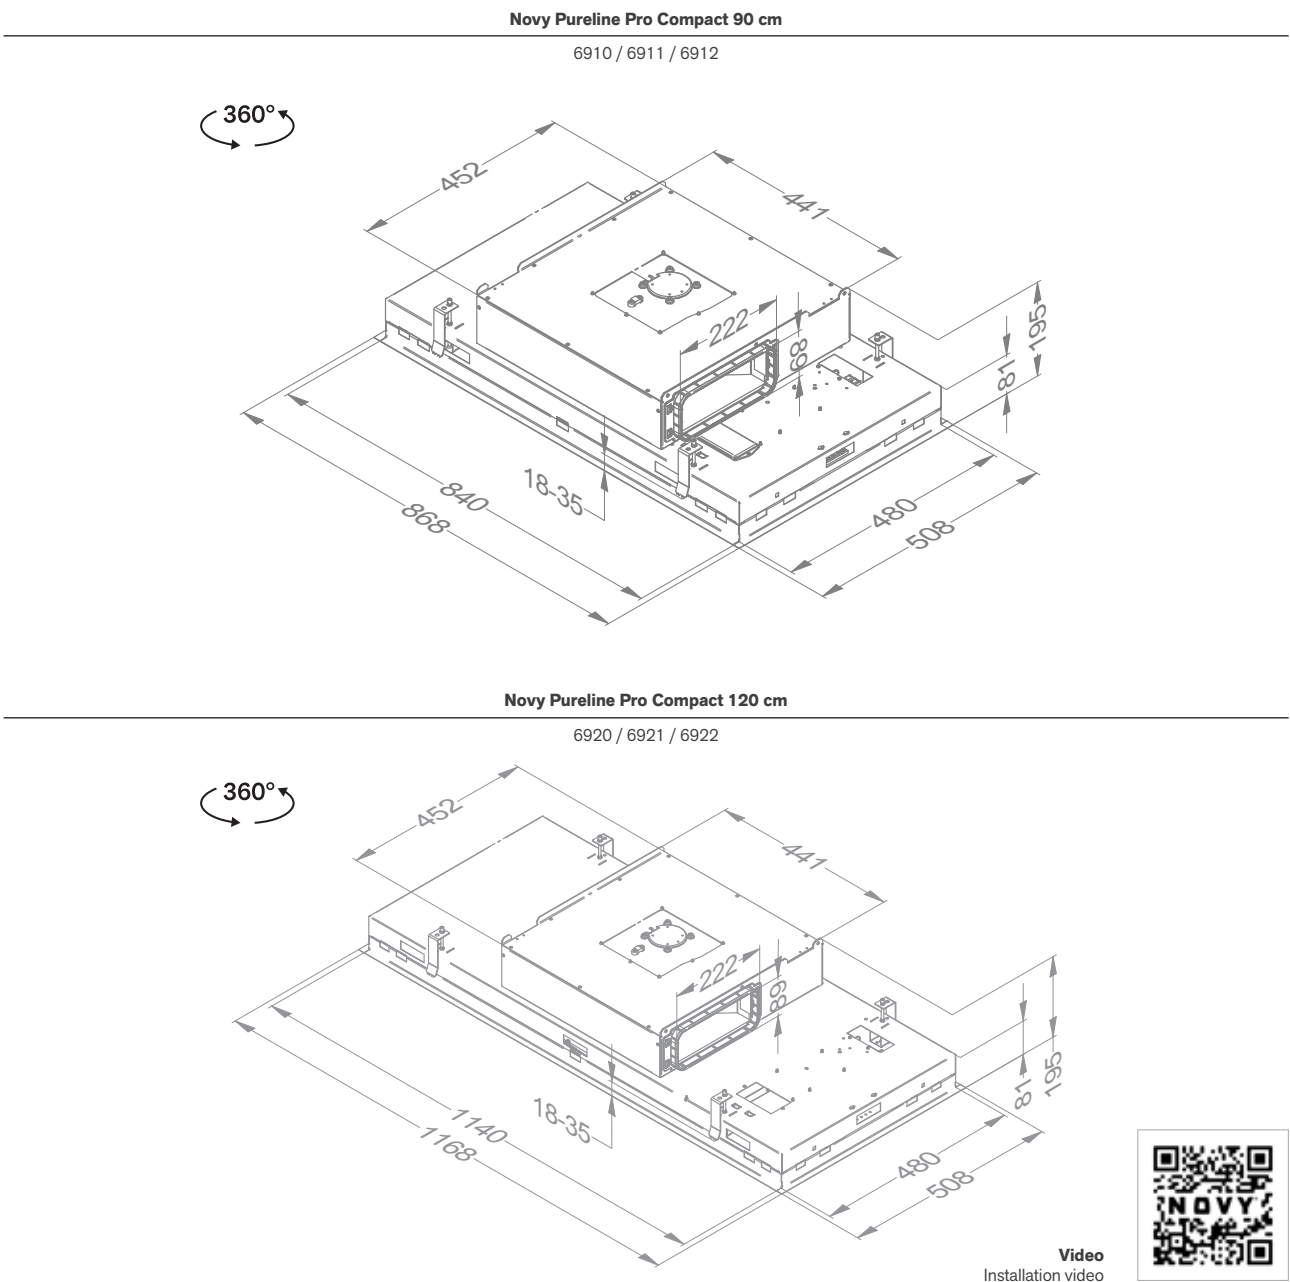


Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
<b>Miscellaneous</b>								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•
Input / output module	990.036	£204	•	•	•	•	•	•
Flat flexible tube (89×222×750 mm)	906.408	£94	•	•	•	•	•	•
Kit Novy Sense sensor for automatic speed control upon detection of cooking fumes and odour	6910.070	£279	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•

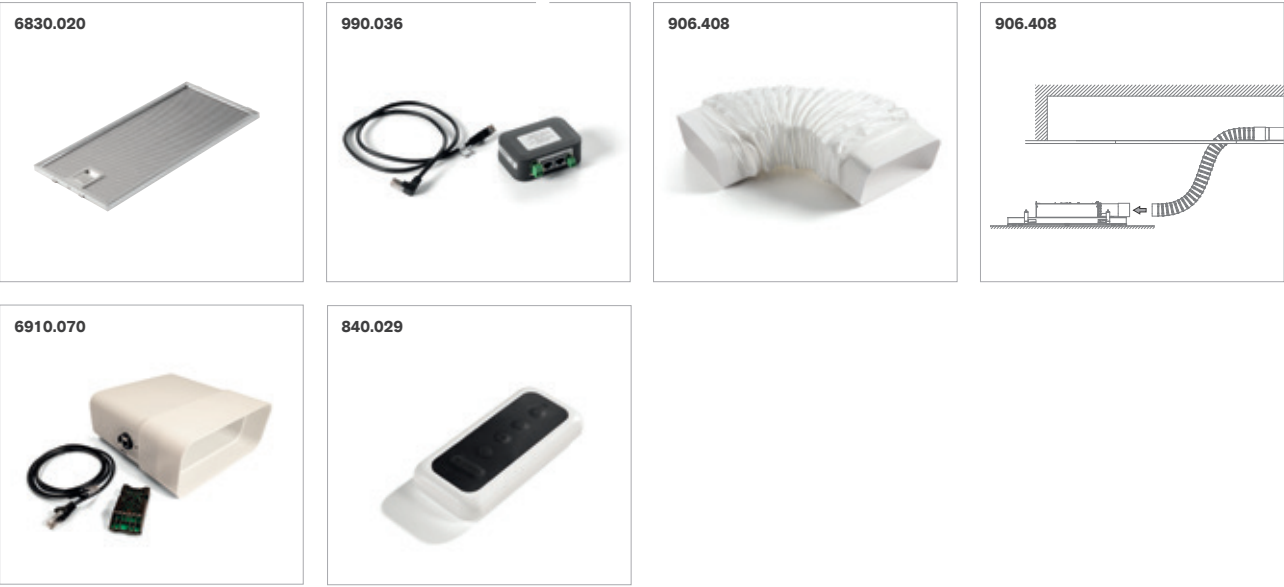

Technical drawings

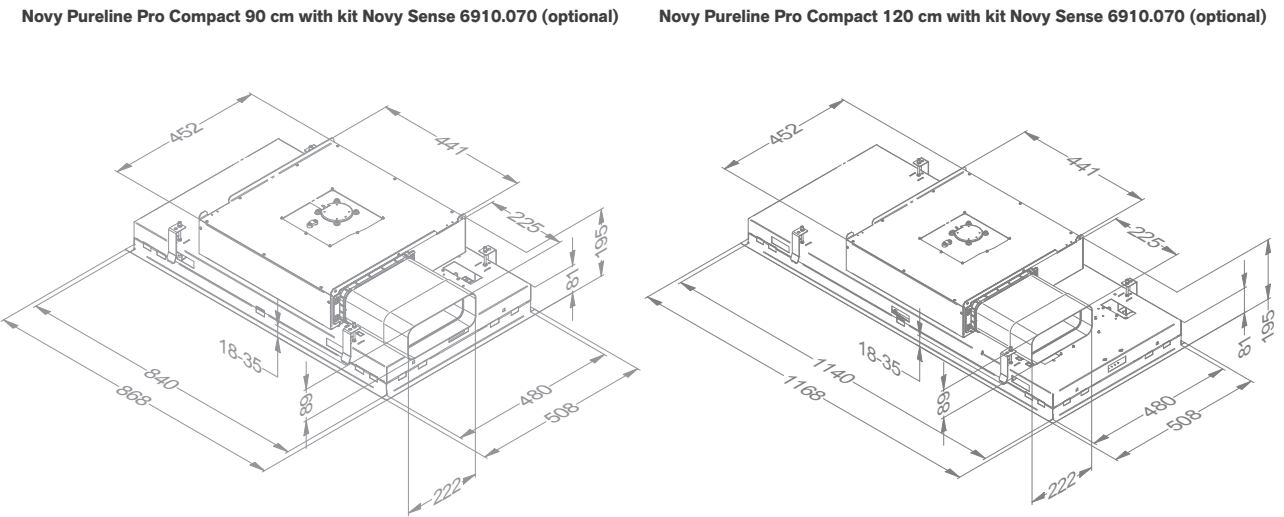

Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
<b>Recirculation with exhaust box</b>								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•	•	•

Technical details recirculationboxes see p. 220-221







# Novy Pureline Compact

- A built-in height of only 19.5 cm thanks to a compact motor
- Flexible installation possibilities due to rotating motor in several directions (left, right, front or rear)
- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K)
- Integrated dimmable LED lighting
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, compact motor	Stainless steel	B	650	38	59	6810	£2,049
	Integrated, compact motor	White	B	650	38	59	6811	£2,049
	Integrated, compact motor	Mineral Black	B	650	38	59	6812	£2,049
120	Integrated, compact motor	Stainless steel	B	651	38	59	6820	£2,289
	Integrated, compact motor	White	B	651	38	59	6821	£2,289
	Integrated, compact motor	Mineral Black	B	651	38	59	6822	£2,289

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications



Functions		
Controls	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting		
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics		
Colour	6810 stainless steel 6811 white (≈RAL 9003) 6812 Mineral Black (≈RAL 9005)	6820 stainless steel 6821 white (≈RAL 9003) 6822 Mineral Black (≈RAL 9005)
Integrated motor	▪ (not removable)	▪ (not removable)
Weight cooker hood / motor casing (kg)	27.8	30.8
Mains voltage (V) / Electrical connection value (W)	230 / 171	230 / 171


Dimensions		
Dimensions (W×D×H) (mm)	868×508×195	1168×508×195
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6810, 6811, 6812	Integrated motor	750	244 / 40	443 / 142	581 / 266	650 / 483	27 / 38	40 / 52	47 / 59	51 / 63
6820, 6821, 6822	Integrated motor	750	240 / 40	444 / 140	582 / 265	651 / 484	27 / 38	40 / 52	47 / 59	51 / 63

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical drawings

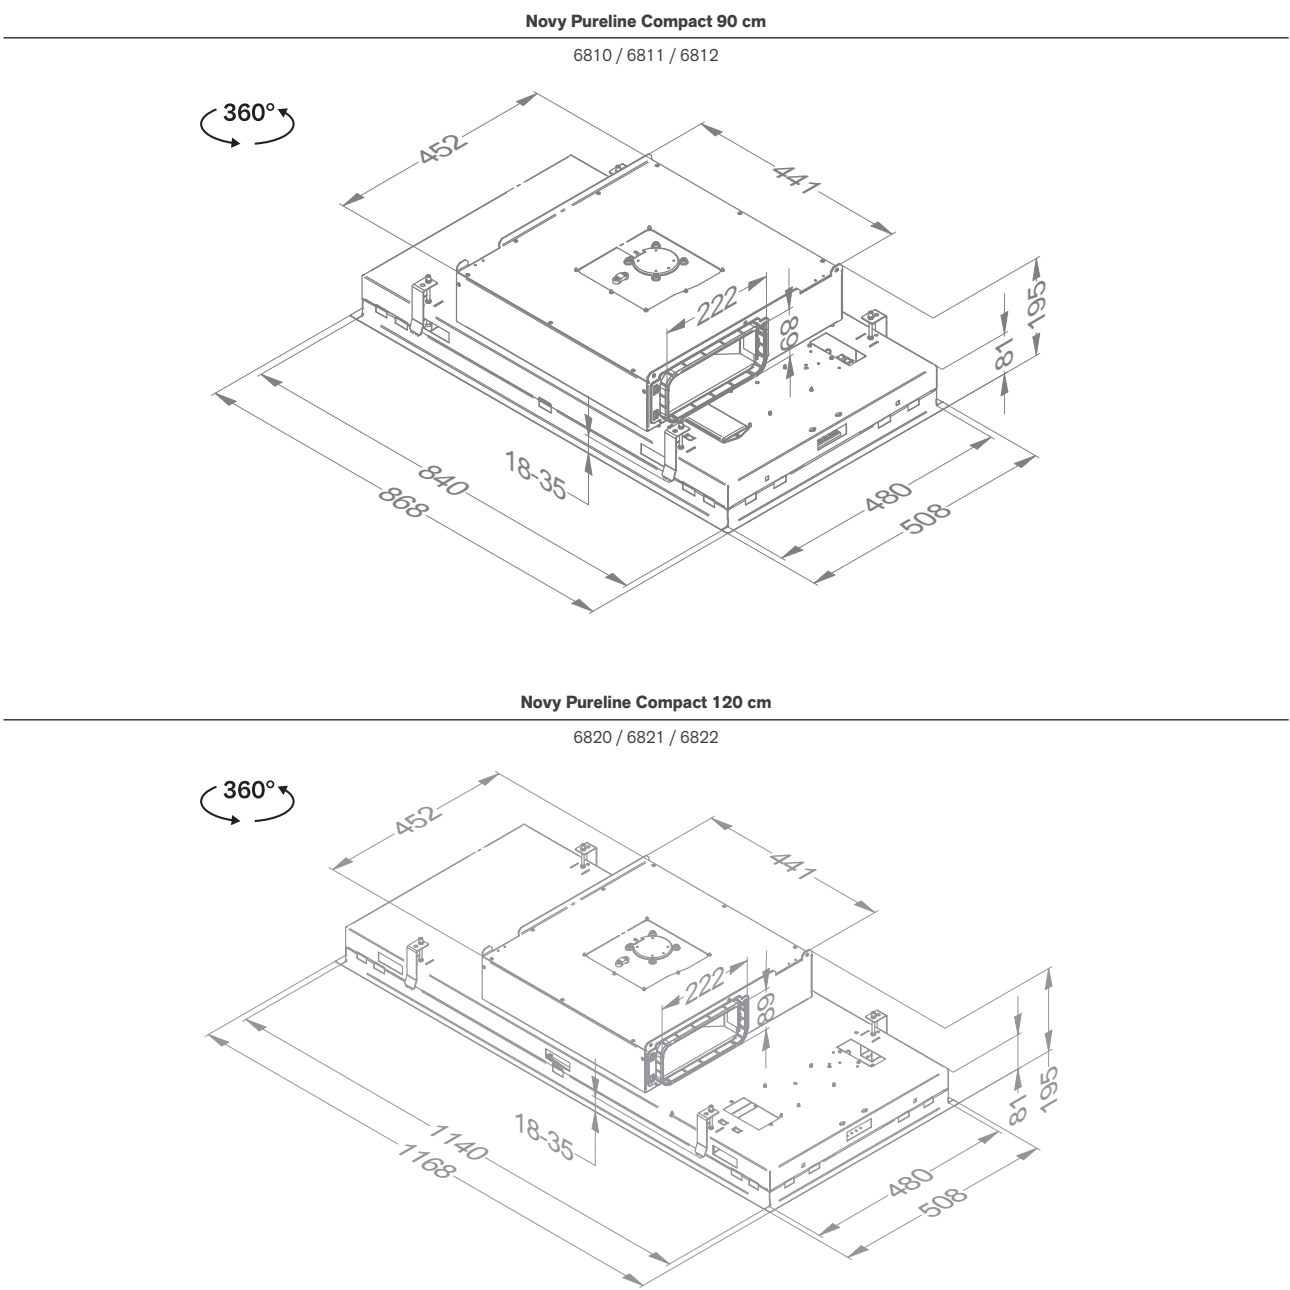



Accessories

	Reference	Price/pc	6810	6811	6812	6820	6821	6822
<b>Miscellaneous</b>								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	▪	▪	▪	▪	▪	▪
Kit connection with external cover and/or lighting	990.030	£169	▪	▪	▪	▪	▪	▪
Flat flexible tube (89×222×750 mm)	906.408	£94	▪	▪	▪	▪	▪	▪
Remote control (black)	840.049	£104	▪	▪	▪	▪	▪	▪

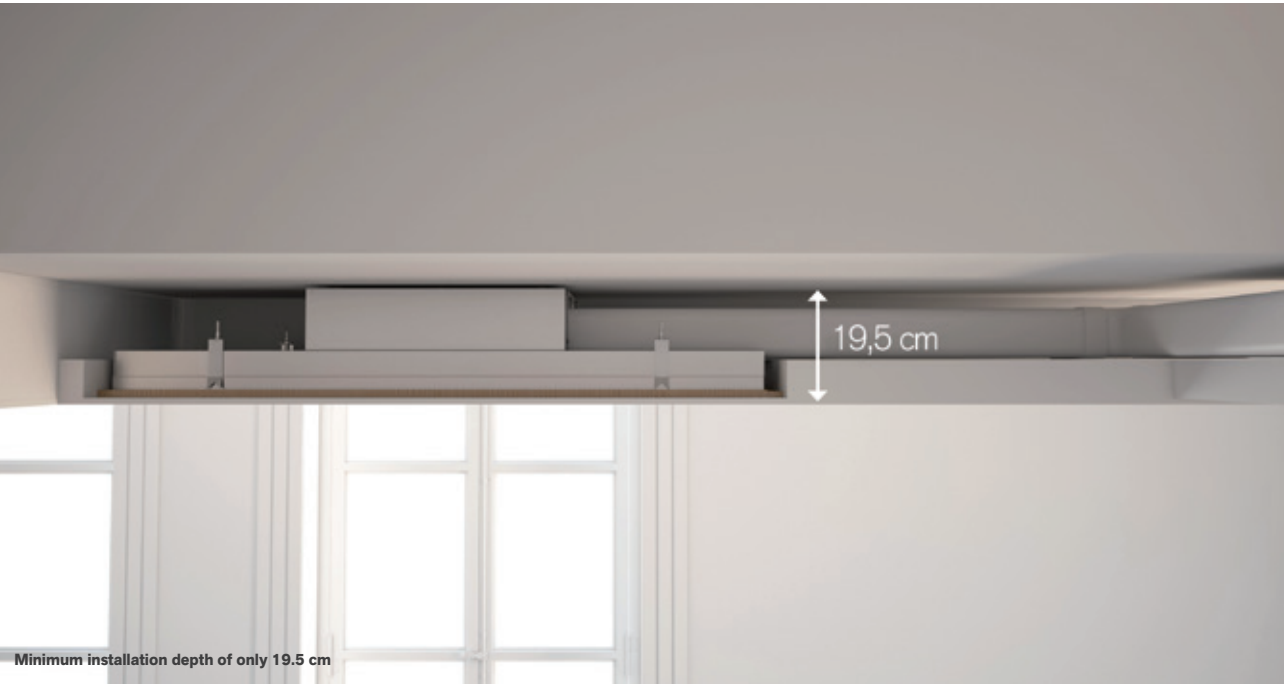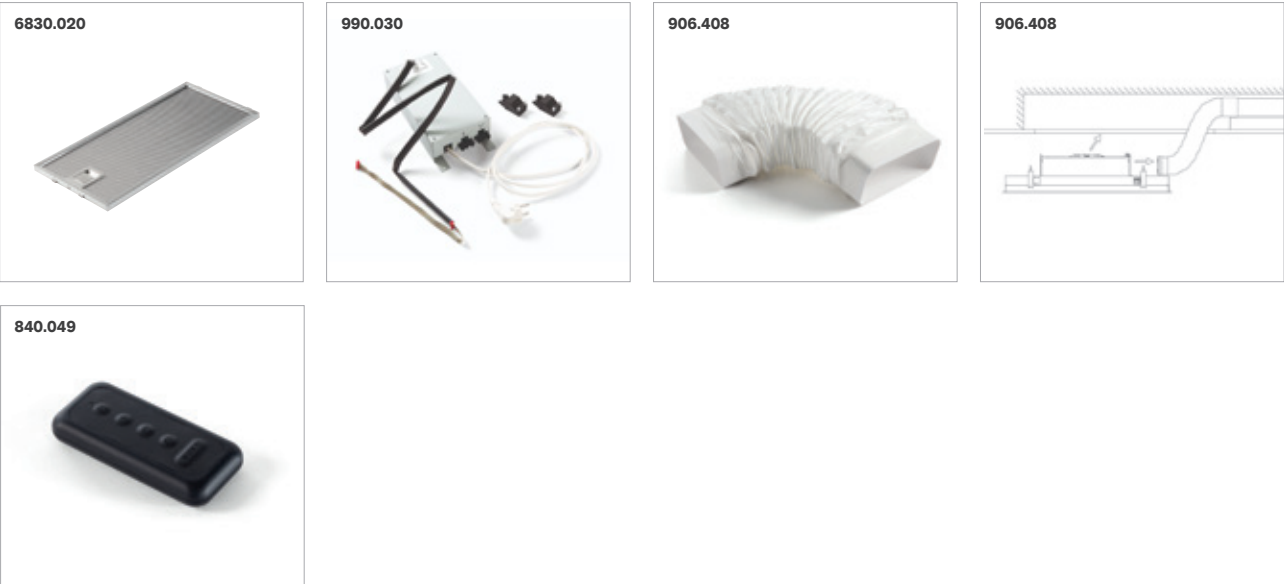

Accessories

	Reference	Price/pc	6810	6811	6812	6820	6821	6822
<b>Recirculation with exhaust box</b>								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	842.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	▪	▪	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	7932.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	▪	▪	▪	▪	▪	▪
Technical details recirculationboxes see p. 220-221								






NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Pureline Pro

- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (5,000 K)
- Ultra slim led strip with extensive lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and ambient mode)
- Automatic speed control with the Novy Sense sensor for detection of cooking vapours and odour (optional)
- With a Cubic motor; which can be rotated in all directions and with optional kit removable for indoor installation
- Operation and settings possible via smartphone or tablet (Novy Connect), as well via remote control
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours

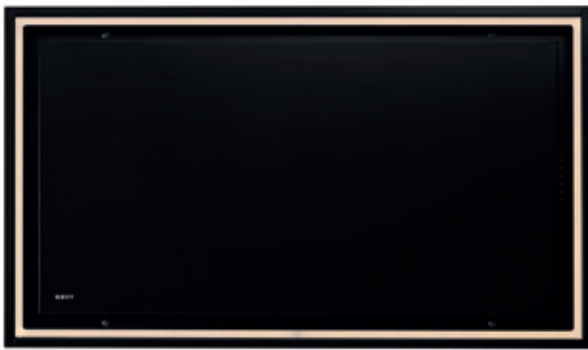

**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



**Novy Connect**  
Operation and settings possible via smartphone or tablet.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, cubic motor or remotely inside <sup>(2)</sup>	Stainless steel	A	713	41	59	6930	£2,409
	Integrated, cubic motor or remotely inside <sup>(2)</sup>	White	A	713	41	59	6931	£2,409
	Integrated, cubic motor or remotely inside <sup>(2)</sup>	Mineral Black	A	713	41	59	6932	£2,409
120	Integrated, cubic motor or remotely inside <sup>(2)</sup>	Stainless steel	A	714	39	59	6940	£2,639
	Integrated, cubic motor or remotely inside <sup>(2)</sup>	White	A	714	39	59	6941	£2,639
	Integrated, cubic motor or remotely inside <sup>(2)</sup>	Mineral Black	A	714	39	59	6942	£2,639

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(2) To install the motor remotely, you should order the additional accessory 800.991.

Video  
Novy Pureline Pro





## Technical specifications



**Novy Pureline Pro 90 cm**  
6930 stainless steel / 6931 white / 6932 Mineral Black



**Novy Pureline Pro 120 cm**  
6940 stainless steel / 6941 white / 6942 Mineral Black

Functions		
Controls	Remote control (black) + Novy Connect	Remote control (black) + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Connect	Optional (6930.060)	Optional (6930.060)
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪
Lighting		
Type of lighting (W)	LED (20) / dimmable	LED (21) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics		
Colour	6930 stainless steel 6931 white (≈RAL 9003) 6932 Mineral Black (≈RAL 9005)	6940 stainless steel 6941 white (≈RAL 9003) 6942 Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Possibility to remotely place the motor indoors	Optional (kit 800.991)	Optional (kit 800.991)
Weight cooker hood / motor casing (kg)	23 / 6	26 / 6
Mains voltage (V) / Electrical connection value (W)	230 / 230	230 / 230


Dimensions		
Dimensions (W×D×H) (mm)	868×508×319	1168×508×319
Height of ceiling unit incl. mounting clamps (without the motor box) (mm)	133	133
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / right / left / front / rear	Top / right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

## Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6930, 6931, 6932	Integrated motor	975	275 / 123	470 / 349	616 / 383	713 / 385	28 / 41	40 / 52	46 / 59	49 / 61
6940, 6941, 6942	Integrated motor	975	262 / 98	466 / 343	617 / 391	714 / 391	27 / 39	40 / 52	46 / 59	49 / 62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

## Technical drawings

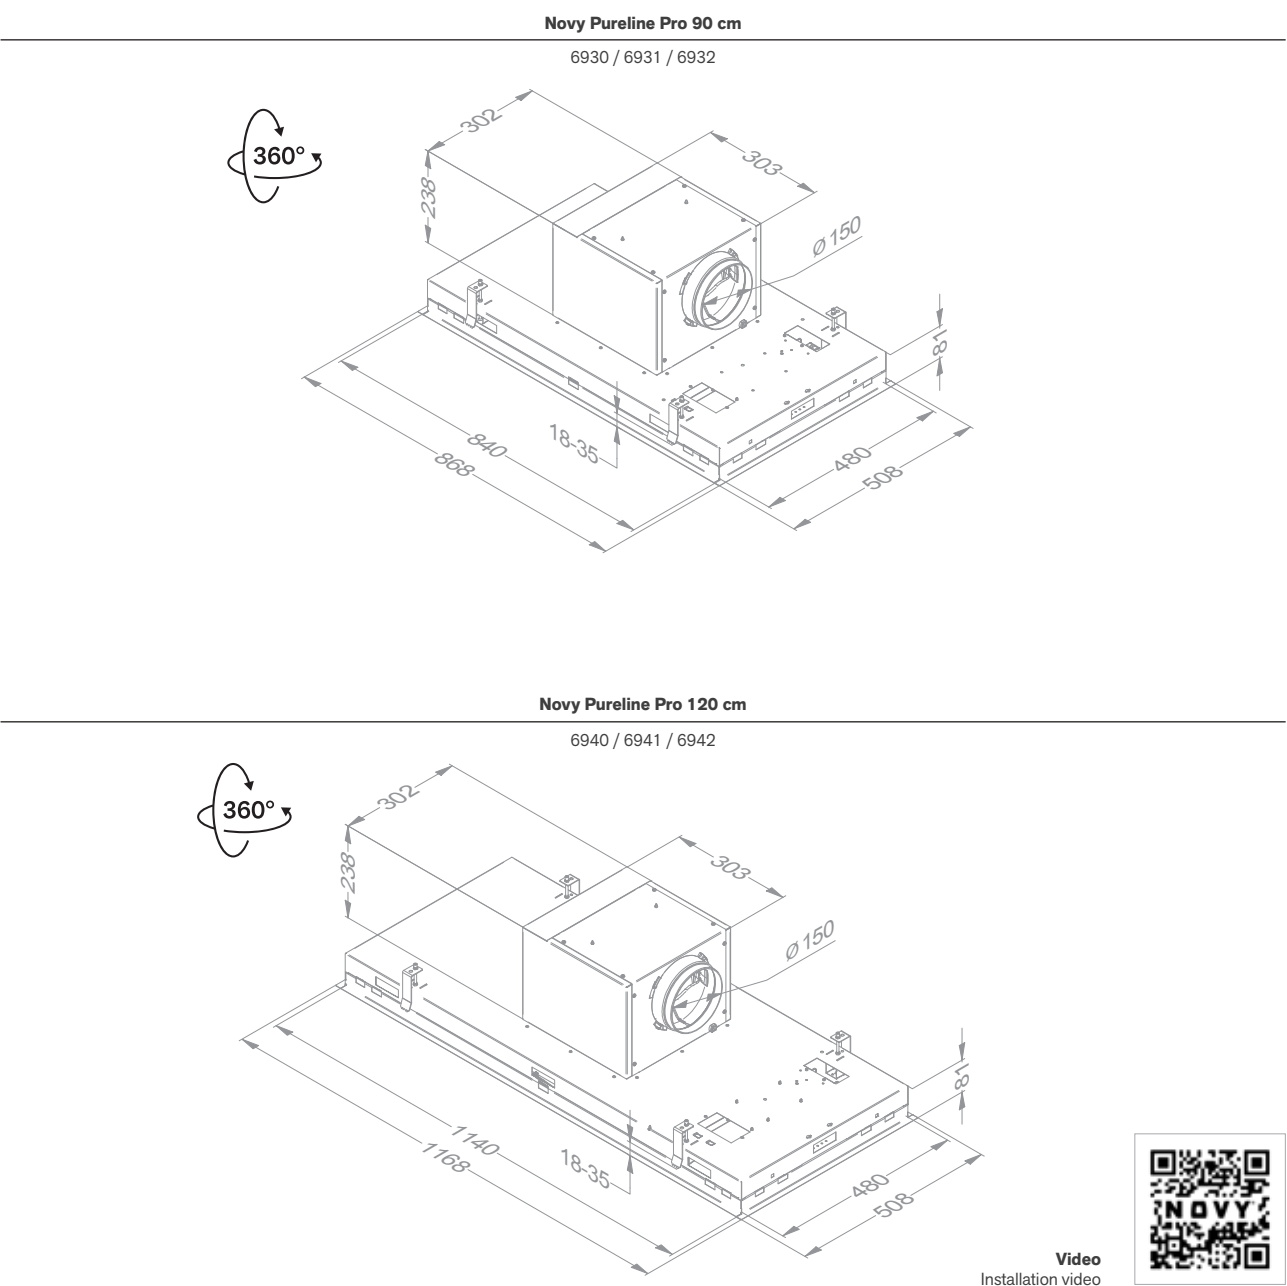


Accessories

	Reference	Price/pc	6930	6931	6932	6940	6941	6942
<b>Miscellaneous</b>								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	▪	▪	▪	▪	▪	▪
Kit to install the remote motor inside	800.991	£159	▪	▪	▪	▪	▪	▪
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6930.050	£264	▪	▪	▪	▪	▪	▪
Extension cable for remote motors (5 m)	7000.094	£49	▪	▪	▪	▪	▪	▪
Input / output module	990.036	£204	▪	▪	▪	▪	▪	▪
Kit Novy Sense sensor for automatic speed control upon detection of cooking fumes and odour (in case of recirculation, always in combination with the exhaust box)	6930.060	£279	▪	▪	▪	▪	▪	▪
Remote control (white)	840.029	£104	▪	▪	▪	▪	▪	▪




Technical drawings

Novy Pureline Pro 90 cm with kit Novy Sense 6930.060 (optional)

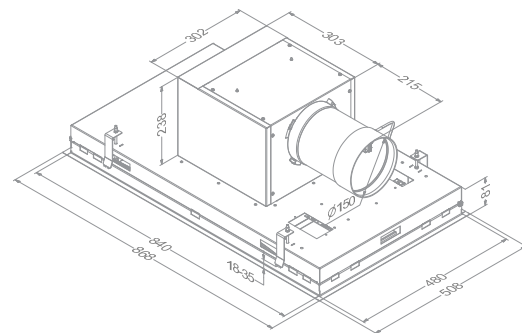

Novy Pureline Pro 120 cm with kit Novy Sense 6930.060 (optional)

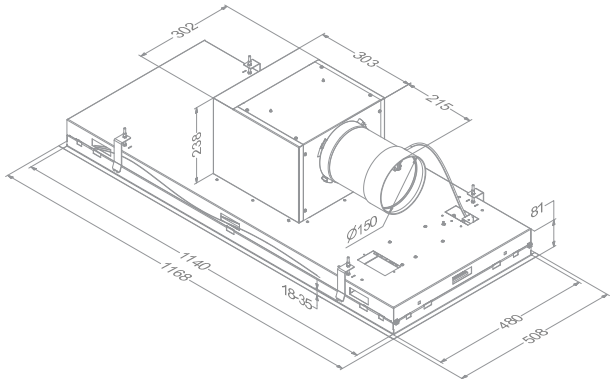

Accessories

	Reference	Price/pc	6930	6931	6932	6940	6941	6942
<b>Recirculation with exhaust box</b>								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	842.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	▪	▪	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	7932.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	▪	▪	▪	▪	▪	▪

Technical details recirculationboxes see p. 220-221







# Novy Pureline with lighting

- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K)
- Integrated dimmable LED lighting
- Flexible installation thanks to models:
  - With a Cubic motor; which can be rotated in all directions and with optional kit removable for indoor installation
  - Without a motor; for use with an external motor
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.







Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor or remote inside <sup>(2)</sup>	Stainless steel	A+	634	34	55	6830	£2,049
	Integrated Cubic motor or remote inside <sup>(2)</sup>	White	A+	634	34	55	6831	£2,049
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6835	£1,569
	Not included <sup>(1)</sup>	White		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6836	£1,569
120	Integrated Cubic motor or remote inside <sup>(2)</sup>	Stainless steel	A+	615	35	55	6840	£2,289
	Integrated Cubic motor or remote inside <sup>(2)</sup>	White	A+	615	35	55	6841	£2,289
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6845	£2,049
	Not included <sup>(1)</sup>	White		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6846	£2,049

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).  
(2) To install the motor remotely, you should order the additional accessory 800.991.

Technical specifications

			
<b>Novy Pureline 90 cm 6830 stainless steel / 6831 white</b>	<b>Novy Pureline 90 cm 6835 stainless steel / 6836 white Motor not included</b>	<b>Novy Pureline 120 cm 6840 stainless steel / 6841 white</b>	<b>Novy Pureline 120 cm 6845 stainless steel / 6846 white Motor not included</b>

Functions				
Controls	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics				
Colour	6830 stainless steel 6831 white (≈RAL 9003)	6835 stainless steel 6836 white (≈RAL 9003)	6840 stainless steel 6841 white (≈RAL 9003)	6845 stainless steel 6846 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	Optional (kit 800.991)		Optional (kit 800.991)	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ <sup>(1)</sup>		▪ <sup>(1)</sup>
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 13 + motor	230 / 118	230 / 13 + motor

Dimensions				
Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (LxW) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.


Air quantity and sound level

Ref.		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6830, 6831	Integrated motor	815	234 / 66	416 / 238	549 / 381	634 / 379	22 / 34	35 / 48	42 / 55	46 / 59
6835, 6836	Not included	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>
6840, 6841	Integrated motor	815	246 / 84	407 / 251	535 / 382	615/ 384	24 / 35	35 / 47	42 / 55	46 / 58
6845, 6846	Not included	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

Novy Pureline 90 cm	
6830 / 6831	6835 / 6836

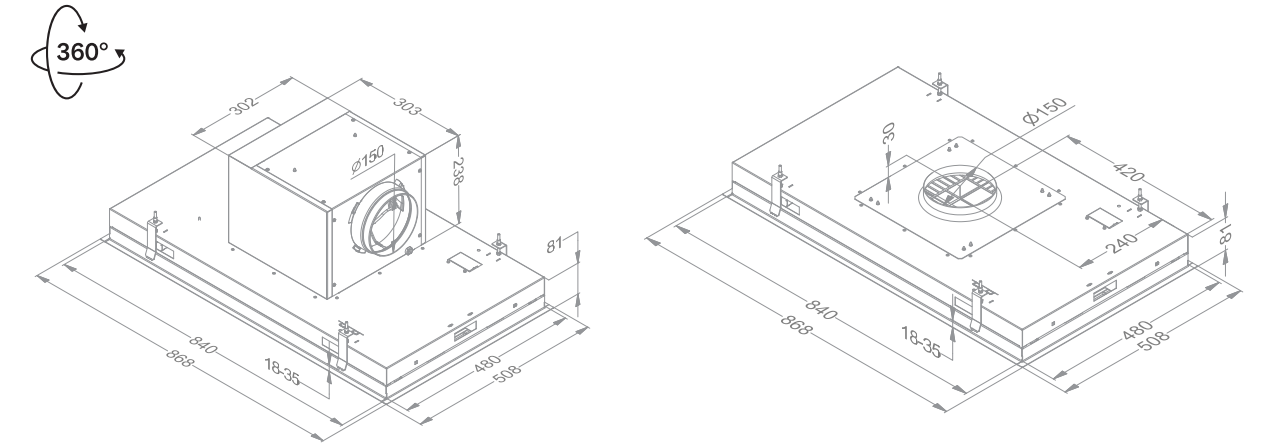

Novy Pureline 120 cm	
6840 / 6841	6845 / 6846

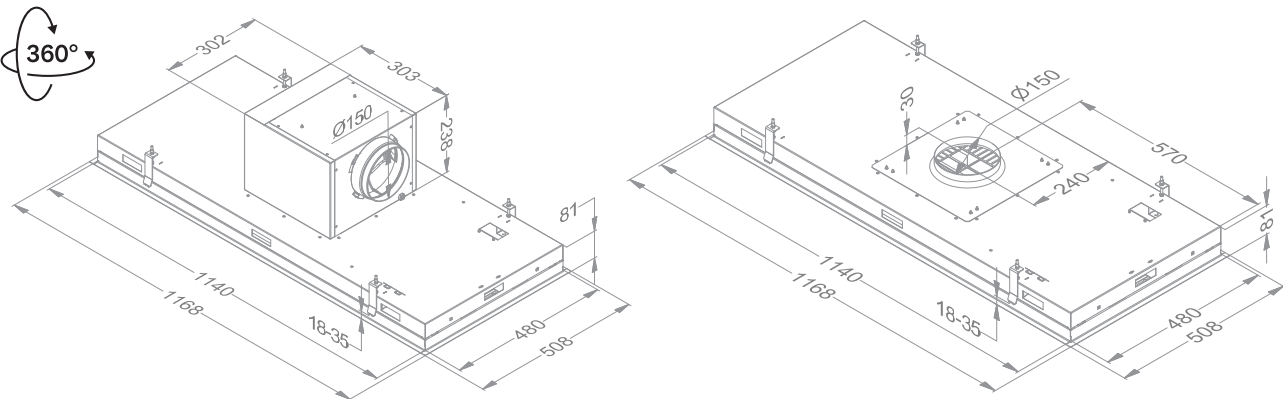

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.



Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
<b>Motor at a distance</b>										
Remote motor for inside	245.999	£654			•	•			•	•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•	•			•	•
Roof motor 48.8 cm height	745.999	£1,784			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•	•			•	•
Technical details motors see p. 222-223										
<b>Miscellaneous</b>										
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•	•	•
Kit to install the remote motor inside	800.991	£159	•	•			•	•		
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£159	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£49	•	•			•	•		
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•	•



Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
<b>Recirculation with exhaust box</b>										
Exhaust box with monoblock filter (500×295×270 mm)										
White (≈RAL 9003)	841.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	842.400	£484	•	•			•	•		
Grey (≈RAL 7030)	843.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•			•	•		
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)										
White (≈RAL 9003)	7931.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	7932.400	£484	•	•			•	•		
Grey (≈RAL 7030)	7933.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•			•	•		
Technical details recirculationboxes see p. 220-221										
<b>Recirculation without exhaust box</b>										
Monoblock filter (also replacement)	6830.060	£194	•	•			•	•		





# Novy Pureline without lighting

- Maximum efficiency yet extremely quiet
- Flexible installation thanks to models:
  - With a Cubic motor; which can be rotated in all directions and with optional kit removable for indoor installation
  - Without a motor; for use with an external motor
- No lighting, to suit your own lighting plan
- External lighting can be connected through the cooker hood and controlled via the cooker hood and/or remote control
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor / remote inside <sup>(2)</sup>	Stainless steel	A++	624	35	55	6833	£2,049
	Integrated Cubic motor / remote inside <sup>(2)</sup>	White	A++	624	35	55	6834	£2,049
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6838	£1,569
	Not included <sup>(1)</sup>	White		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6839	£1,569
120	Integrated Cubic motor / remote inside <sup>(2)</sup>	Stainless steel	A++	611	36	55	6843	£2,289
	Integrated Cubic motor / remote inside <sup>(2)</sup>	White	A++	611	36	55	6844	£2,289
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6848	£2,049
	Not included <sup>(1)</sup>	White		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	6849	£2,049

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).  
(2) To install the motor remotely, you should order the additional accessory 800.991.



Technical specifications

			
<b>Novy Pureline 90 cm 6833 stainless steel / 6834 white</b>	<b>Novy Pureline 90 cm 6838 stainless steel / 6839 white Motor not included</b>	<b>Novy Pureline 120 cm 6843 stainless steel / 6844 white</b>	<b>Novy Pureline 120 cm 6848 stainless steel / 6849 white Motor not included</b>

Functions				
Controls	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
External lighting to connect and operate with remote control (W)	Max. 300 (or with relay>300)	Max. 300 (or with relay>300)	Max. 300 (or with relay>300)	Max. 300 (or with relay>300)

Technical characteristics				
Colour	6833 stainless steel 6834 white (≈RAL 9003)	6838 stainless steel 6839 white (≈RAL 9003)	6843 stainless steel 6844 white (≈RAL 9003)	6848 stainless steel 6849 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	Optional (kit 800.991)		Optional (kit 800.991)	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ <sup>(1)</sup>		▪ <sup>(1)</sup>
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 105	230 / 0 + motor	230 / 105	230 / 0 + motor

Dimensions				
Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (L×W) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.


Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6833, 6834	Integrated motor	815	256 / 86	417 / 235	549 / 382	624 / 382	24 / 35	35 / 47	42 / 55	46 / 58
6838, 6839	Not included	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>
6843, 6844	Integrated motor	815	227 / 69	398 / 240	530 / 381	611 / 382	26 / 36	35 / 46	42 / 55	46 / 57
6848, 6849	Not included	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>


Noise levels measured in accordance with IEC 60704-2-13 standards, fl ow rates according to IEC 61591.

Technical drawings

Novy Pureline 90 cm	
6833 / 6834	6838 / 6839

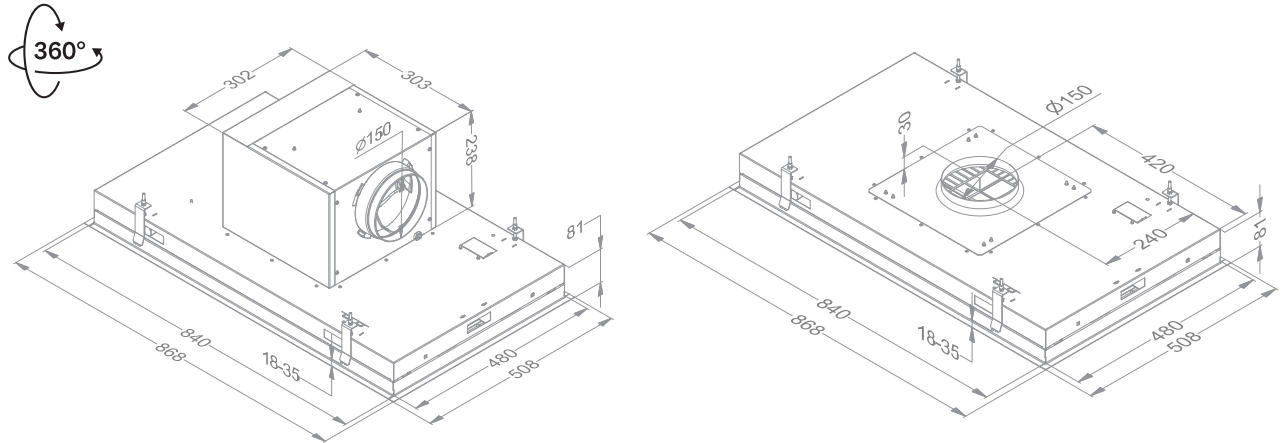

Novy Pureline 120 cm	
6843 / 6844	6848 / 6849

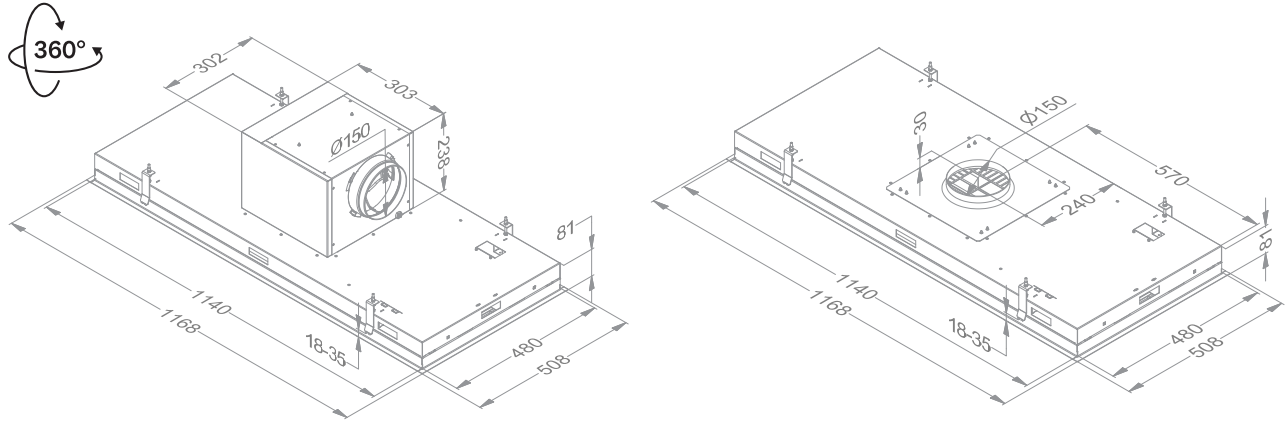

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
<b>Motor at a distance</b>										
Remote motor for inside	245.999	£654			•	•			•	•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•	•			•	•
Roof motor 48.8 cm height	745.999	£1,784			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•	•			•	•
Technical details motors see p. 222-223										
<b>Miscellaneous</b>										
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•	•	•
Kit to install the remote motor inside	800.991	£159	•	•			•	•		
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£159	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£49	•	•			•	•		
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•	•

Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
<b>Recirculation with exhaust box</b>										
Exhaust box with monoblock filter (500×295×270 mm)										
White (≈RAL 9003)	841.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	842.400	£484	•	•			•	•		
Grey (≈RAL 7030)	843.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•			•	•		
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)										
White (≈RAL 9003)	7931.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	7932.400	£484	•	•			•	•		
Grey (≈RAL 7030)	7933.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•			•	•		
Technical details recirculationboxes see p. 220-221										
<b>Recirculation without exhaust box</b>										
Monoblock filter (also replacement)	6830.060	£194	•	•			•	•		

245.999

245.999

445.999

445.999

745.999

745.999

755.999

755.999

800.991

6830.053

6830.053

990.030

841.400

842.400

843.400

830.055

7931.400

7932.400

7933.400

7900.055





# Novy Maxi Pureline

- Extremely powerful
- Perfect for above an extra large cooking surface
- Industrial look
- No lighting, to suit your own lighting plan
- External lighting to be connected through the cooker hood and controlled via the cooker hood and/or remote control
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
150	Not included <sup>(1)</sup>	Stainless steel	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	855	£2,534
	Not included <sup>(1)</sup>	White	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	856	£2,534

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to 2 internal motors, wall motors or flat roof motors (see accessories).

Technical specifications



**Novy Maxi Pureline**  
**855 stainless steel / 856 white**

Functions	
Controls	Buttons + remote control (white)
Number of speed settings	3 + power function
Power setting with automatic downshift (min.)	6
Recirculation	Optional (in combination with 2 inside motors 245.999)
InTouch function for hobs	•
Auto-Stop, automatic switch-off after 3 hours	•
Run-on timer (min.)	10
Cleaning indicator for grease filter	•
Replacement indicator for recirculation filter	•

Lighting	
External lighting to connect and operate with remote control (optional) (W)	Max. 300 (or with relay>300)


Technical characteristics	
Colour	855 stainless steel 856 white (≈RAL 9003)
Motor not included (suitable for remote motor inside, wall motor or flat roof motor outside)	• <sup>(1)</sup>
Weight cooker hood / motor casing (kg)	35 + motors
Mains voltage (V) / Electrical connection value (W)	230 / 0 + motors

Dimensions (mm)	
Dimensions (W×D×H) (mm)	1460×670×90
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133
Opening (LxW) (mm)	1438×648
Exhaust opening diameter (mm)	2×150
Exhaust position	2×top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600 –1600
Recommended installation height with an electric or ceramic cooker(Hmin–Hmax) (mm)	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600

Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A)			
		sound pressure (re20µPa) / sound power (re 1pW)							
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
855–856	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>

Technical drawings

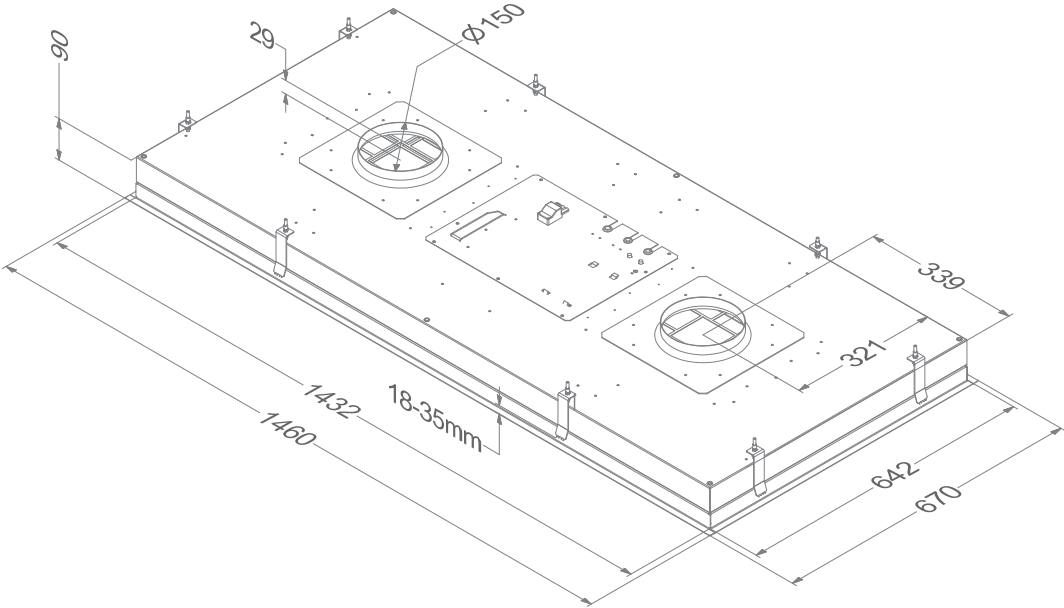

(1) This cooker hood should be connected to 2x remote motor inside, 2x wall motor or 2x roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.



Accessories

	Reference	Price/pc	855	856
<b>Motor at a distance</b>				
Remote motor for inside (2 pcs to order)	245.999	£654	•	•
Wall motor, minimum 5 m between cooker hood and motor (2 pcs to order)	445.999	£1,064	•	•
Roof motor 48.8 cm height (2 pcs to order)	745.999	£1,784	•	•
Roof motor with noise reduction 78.4 cm height (2 pcs to order)	755.999	£2,049	•	•
Technical details motors see p. 222-223				
<b>Miscellaneous</b>				
Grease filter (replacement) (2 pcs to order)	7400.020	£104	•	•
Adapter to connect a flat duct (exhaust direction 1x left, 1x right) (2 pcs to order)	830.053	£159	•	•
Extension cable for remote motors (5 m) (2 pcs to order)	7000.092	£49	•	•
Kit connection with external cover and/or lighting	990.030	£169	•	•
Remote control (black)	840.049	£104	•	•



Accessories

	Reference	Price/pc	855	856
<b>Recirculation with exhaust box</b>				
Exhaust box with monoblock filter (500×295×270 mm)				
White (≈RAL 9003) (2 pcs to order)	841.400	£484	•	•
Mineral Black (≈RAL 9005) (2 pcs to order)	842.400	£484	•	•
Grey (≈RAL 7030) (2 pcs to order)	843.400	£484	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)				
White (≈RAL 9003) (2 pcs to order)	7931.400	£484	•	•
Mineral Black (≈RAL 9005) (2 pcs to order)	7932.400	£484	•	•
Grey (≈RAL 7030) (2 pcs to order)	7933.400	£484	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•
Technical details recirculationboxes see p. 220-221				
<b>Recirculation without exhaust box</b>				
Kit with monoblock filters	850.400	£369	•	•
Monoblock replacement filter for 850.400 (2 pcs to order)	7300.055	£169	•	•



# Built-in cooker hoods

for deep cabinets

Novy  
Mini Pureline



Novy Crystal



Novy  
Canopy  
Essence



Width of cabinet or canopy			
60 cm	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
90 cm	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Colour			
White	<input type="checkbox"/>	<input type="checkbox"/>	
Stainless steel	<input type="checkbox"/>		<input type="checkbox"/>
Mineral Black	<input type="checkbox"/>	<input type="checkbox"/>	
Motor			
Integrated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
At a distance (inside)	Optional		
Exhaust			
To the outside	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Recirculation	Optional	Optional	Optional

p. 128

p. 134


p. 140





# Novy Mini Pureline

- Integrated in a decorative chimney or alcove
- Flexible installation of the Cubic motor for more placement options by use of the optional kit
- Integrated dimmable LED lighting
- LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K)
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours

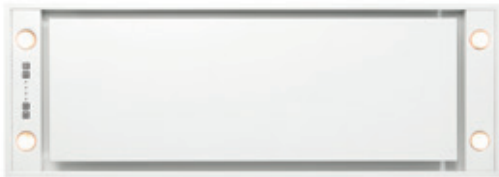

**Distance**  
Maximum distance between cooker hood and hob.  
75 cm: 810, 811, 816  
85 cm: 820, 821, 826



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor / remote inside <sup>(2)</sup>	Stainless steel	A	534	37	54	810	£1,444
	Integrated Cubic motor / remote inside <sup>(2)</sup>	White	A	534	37	54	811	£1,444
	Integrated Cubic motor / remote inside <sup>(2)</sup>	Mineral Black	A	534	37	54	816	£1,444
90	Integrated Cubic motor / remote inside <sup>(2)</sup>	Stainless steel	A+	601	37	52	820	£1,569
	Integrated Cubic motor / remote inside <sup>(2)</sup>	White	A+	601	37	52	821	£1,569
	Integrated Cubic motor / remote inside <sup>(2)</sup>	Mineral Black	A+	601	37	52	826	£1,569

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(2) To install the motor remotely, you should order the additional accessory 800.996.

## Technical specifications



**Novy Mini Pureline**  
**810 stainless steel / 811 white /**  
**816 Mineral Black**



**Novy Mini Pureline**  
**820 stainless steel / 821 white /**  
**826 Mineral Black**

## Functions

Controls	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

## Lighting

Type of lighting (number/W)	LED (4x2) / dimmable	LED (4x2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

### Technical characteristics

Colour	810 stainless steel 811 white (≈RAL 9003) 816 Mineral Black (≈RAL 9005)	820 stainless steel 821 white (≈RAL 9003) 826 Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Option to install the remote motor inside	Optional (kit 800.996)	Optional (kit 800.996)
Weight cooker hood / motor casing (kg)	10 / 5	12 / 5
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 121

### Dimensions

Dimensions (W×D×H) (mm)	560×301×330	860×301×330
Opening (L×W) (mm)	545×286	845×286
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / front / left / right / rear	Top / front / left / right / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–850

### Air quantity and sound level


		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
Type			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
810, 811, 816	Integrated motor	815	205 / 79	333 / 219	399 / 322	534 / 370	26 / 37	37 / 49	42 / 54	49 / 61
820, 821, 826	Integrated motor	815	237 / 79	379 / 225	451 / 329	601 / 372	26 / 37	36 / 48	40 / 52	47 / 59

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

## Technical drawings


**Novy Mini Pureline 60 cm**

810 / 811 / 816

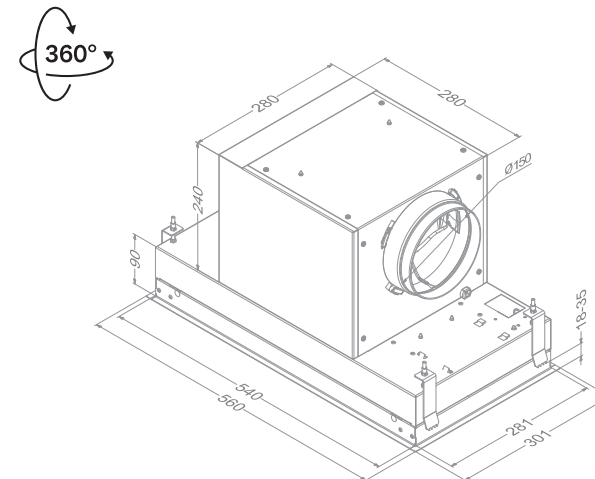

### Novy Mini Pureline 90 cm

820 / 821 / 826

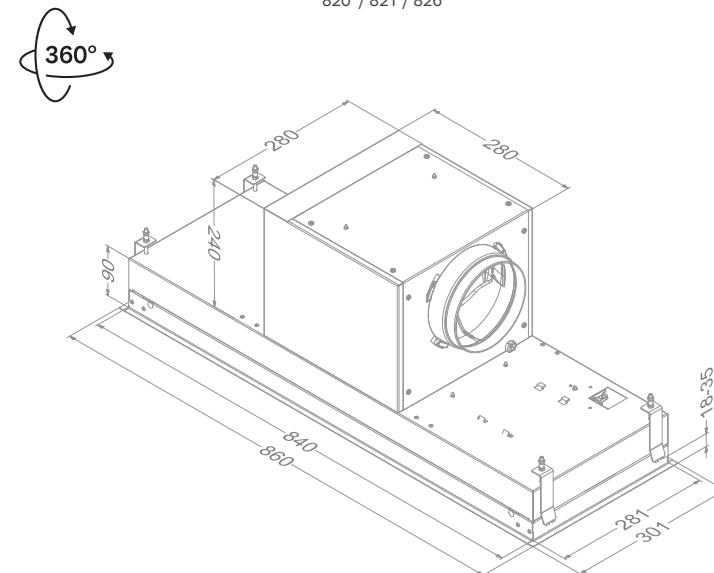



## Accessories

	Reference	Price/pc	810	811	816	820	821	826
Miscellaneous								
Grease filter (replacement)	609.014	£69	▪	▪	▪			
Grease filter (replacement)	7400.020	£104				▪	▪	▪
Kit to install the remote motor inside	800.996	£159				▪	▪	▪
Adapter to connect a flat duct (air outlet positioning: front and rear only)	830.053	£159				▪	▪	▪
Extension cable for remote motors (5 m)	7000.096	£49	▪	▪	▪	▪	▪	▪
Kit connection with external cover and/or lighting	990.030	£169	▪	▪	▪	▪	▪	▪
Remote control (black)	840.049	£104	▪	▪	▪	▪	▪	▪

## Accessories

	Reference	Price/pc	810	811	816	820	821	826
Recirculation with exhaust box								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	842.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	▪	▪	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	7932.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	▪	▪	▪	▪	▪	▪
Technical details recirculationboxes see p. 220-221								

Recirculation with exhaust box								
Monoblock filter (also replacement)	811.400	£159	▪	▪	▪			
Kit with monoblock filters	820.400	£184				▪	▪	▪
Monoblock replacement filter for recirculation kit 820.400	7300.055	£169				▪	▪	▪







# Novy Crystal

- Integrated in a decorative chimney or alcove
- Integrated dimmable LED lighting (3,000 K)
- Discreetly finished in white or black glass
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours






**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor	White glass	B	600	39	52	26050	£844
	Integrated Cubic motor	Black glass	B	600	39	52	26052	£844
90	Integrated Cubic motor	White glass	B	592	40	51	26080	£964
	Integrated Cubic motor	Black glass	B	592	40	51	26082	£964

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



## Technical specifications



**Novy Crystal 60 cm**  
**26050 white glass /**  
**26052 black glass**



**Novy Crystal 90 cm**  
26080 white glass /  
26082 black glass

## Functions

Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

## Lighting

Type of lighting (W)	LED (7) / dimmable	LED (14) / dimmable
Lighting colour (K)	3,000	3,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

### Technical characteristics

Colour	26050 white glass 26052 black glass	26080 white glass 26082 black glass
Integrated motor	▪	▪
Weight cooker hood (kg)	12,5	15
Mains voltage (V) / Electrical connection value (W)	230 / 231	230 / 238

### Dimensions

Dimensions (W×D×H) (mm)	533×313×331	833×313×331
Opening (L×W) (mm)	510×290	810×290
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

## Air quantity and sound level


		Maximum free flow rate (m3/h)	Air quantity (m <sup>3</sup> /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
26050, 26052	Integrated motor	700	207 / 443	282 / 491	386 / 525	600 / 564	27 / 39	33 / 45	40 / 52	50 / 61
26080, 26082	Integrated motor	700	207 / 447	276 / 489	371 / 526	592 / 559	28 / 40	33 / 45	39 / 51	49 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

## Technical drawings


**Novy Crystal 60 cm**

26050 / 26052

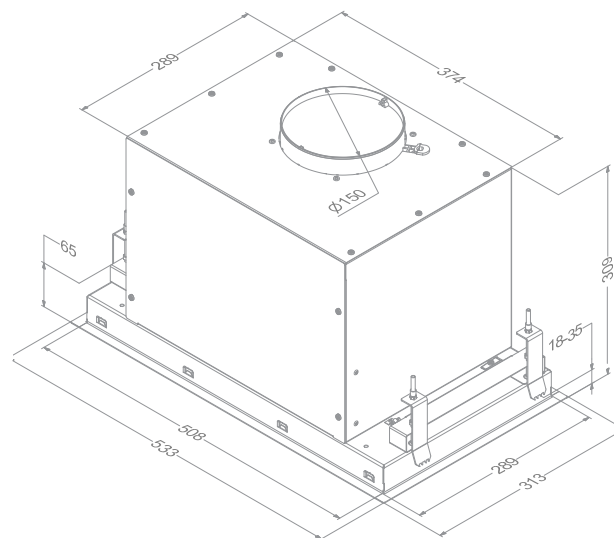


**Novy Crystal 90 cm**

26080 / 26082

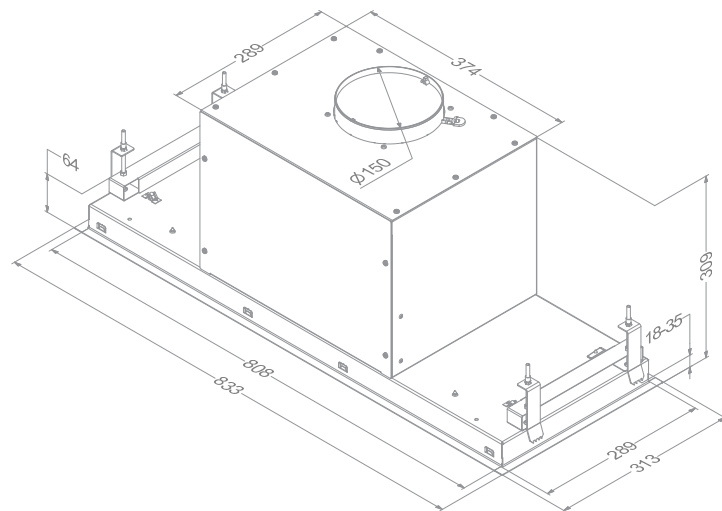

Accessories

	Reference	Price/pc	26050	26052	26080	26082
<b>Miscellaneous</b>						
Grease filter (replacement)	26050.020	£79	•	•	•	•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•

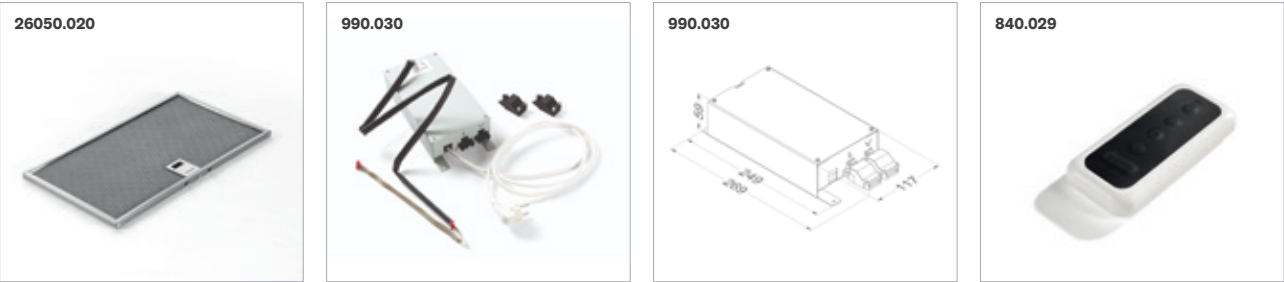

Accessories

	Reference	Price/pc	26050	26052	26080	26082
<b>Recirculation with exhaust box</b>						
Exhaust box with monoblock filter (500×295×270 mm)						
White (≈RAL 9003)	841.400	£484	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)						
White (≈RAL 9003)	7931.400	£484	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•
Technical details recirculationboxes see p. 220-221						
<b>Recirculation without exhaust box</b>						
Kit with monoblock filters	26050.400	£184	•	•	•	•
Monoblock replacement filter for recirculation kit 26050.400	26050.055	£169	•	•	•	•







# Novy Canopy Essence

- Built-in units in stainless steel for a decorative chimney or canopy
- Suitable for compact kitchen setup
- Convenience and easy control
- Sleek design filter for the optimum extraction of cooking vapours
- LED lighting (2,700 K)



**Distance**  
Maximum distance between cooker hood and hob.



**Recirculation**  
Recirculation is optional.





Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	517	37	58	828	£604
90	Integrated	Stainless steel	B	521	34	58	829 <sup>(3)</sup>	£669

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.

## Technical specifications


			
		<b>Novy Canopy Essence 60 cm 828</b>	<b>Novy Canopy Essence 90 cm 829</b>
<b>Functions</b>			
Controls	Buttons		Buttons
Number of speed settings	4		4
Recirculation	Optional (carbon filter cartridge)		Optional (carbon filter cartridge)
Cleaning indicator for grease filter	▪		▪
Replacement indicator for recirculation filter	▪		▪
<b>Lighting</b>			
Type of lighting (number/W)	LED (2×2)		LED (2×2)
<b>Technical characteristics</b>			
Colour	Stainless steel		Stainless steel
Lighting colour (K)	2,700		2,700
Integrated motor	▪		▪
Weight cooker hood / motor casing (kg)	10		11,5
Mains voltage (V) / Electrical connection value (W)	230 / 167		230 / 168
<b>Dimensions</b>			
Dimensions (W×D×H) (mm)	546×296×279		846×296×279
Opening (LxW) (mm)	525×275		825×275
Exhaust opening diameter (mm)	150		150
Exhaust position	Top		Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750		650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750		600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750		650–750

## Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
828	Integrated motor	581	202 / 274	299 / 392	398 / 458	517 / 492	26 / 37	33 / 44	42 / 53	47 / 58
829	Integrated motor	581	199 / 259	299 / 381	399 / 451	521 / 488	23 / 34	28 / 39	40 / 51	47 / 58

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

## Technical drawings

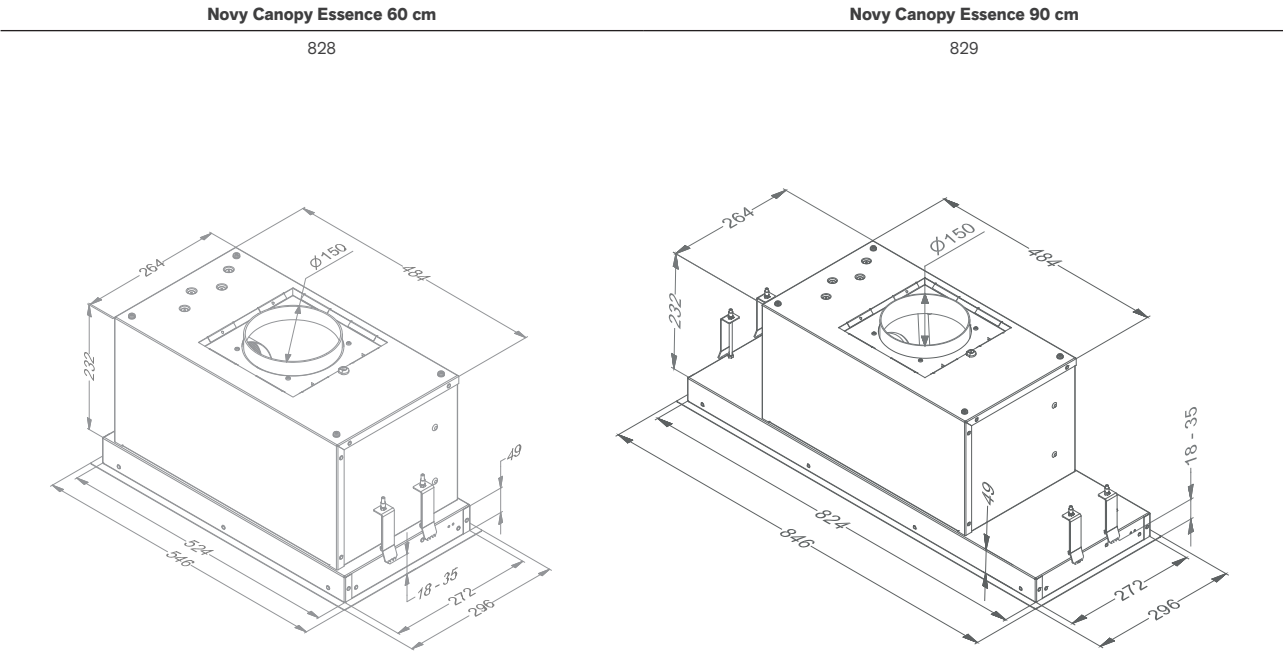

## Accessories

	Reference	Price/pc	828	829
<b>Miscellaneous</b>				
Kit with LED lighting (4,000 K)	906.303	£79	•	•
Grease filter (replacement)	828.020	£104	•	
Grease filter (replacement) (2 pcs to order)	829.020	£104		•
<b>Recirculation without exhaust box</b>				
Carbon cartridge (also replacement)	6200.055	£79	•	•





# Telescopic cooker hoods

for shallow cabinets

Novy  
Fusion Pro



Novy Fusion



Novy  
Telescopic



Novy  
Telescopic  
Essence



## Width of cabinet or canopy

60 cm	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
90 cm	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
120 cm	<input type="checkbox"/>			

## Colour

White	<input type="checkbox"/>	<input type="checkbox"/>		
Stainless steel			<input type="checkbox"/>	<input type="checkbox"/>
Anthracite	<input type="checkbox"/>			

## Motor

Integrated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
------------	--------------------------	--------------------------	--------------------------	--------------------------

## Exhaust

To the outside	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Recirculation	Optional	Optional	Optional	Optional

p. 148

p. 154

p. 158

p. 164



# Seamless integration into shallow wall cabinet

## Discover all assets

Novy Fusion Pro meets the demand for designer cooker hoods in shallow wall cabinets. With this highly developed concept, Fusion Pro, like Fusion, is concealed and integrated into a shallow wall cabinet. Discover all the advantages.

Transparent tilting panel  
to catch cooking fumes

Invisible in closed  
position

Tailored design exhaust  
grill for upper cabinets  
in case of recirculation

Seamless finishing to  
protect the wall cabinet

Convenient storage  
space

Chimney extension available  
in white and anthracite





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Fusion Pro

- Can be invisibly integrated into a wall cabinet with minimum and maximum depth of between 300-360 mm
- Tilting cover in transparent glass for optimum capture of cooking vapours
- Completely invisible in closed position
- LED strip (3,000 K), dimmable
- Sufficient space for storage
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours

Novy Fusion Pro / Telescopic cooker hoods



148 – 149



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Anthracite / Anthracite glass	A+	682	48	59	8710	£1,499
	Integrated	White / transparant glass	A+	682	48	59	8711	£1,499
90	Integrated	Anthracite / Anthracite glass	A	674	48	59	8740	£1,739
	Integrated	White / transparant glass	A	674	48	59	8741	£1,739
120	Integrated	Anthracite / Anthracite glass	A	701	48	59	8770	£2,084
	Integrated	White / transparant glass	A	701	48	59	8771	£2,084




Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Can only be fitted between two wall units.

Video  
Novy Fusion Pro



### Technical specifications


			
	<b>Novy Fusion Pro 60 cm</b> <b>8710 anthracite + glass</b> <b>8711 white + glass</b>	<b>Novy Fusion Pro 90 cm</b> <b>8740 anthracite + glass</b> <b>8741 white + glass</b>	<b>Novy Fusion Pro 120 cm</b> <b>8770 anthracite glass</b> <b>8771 white + glass</b>
<b>Functions</b>			
Controls	Touch control	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	•	•	•
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	•	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•	•
Run-on timer (min.)	10	10	10
Cleaning indicator for grease filter	•	•	•
Replacement indicator for recirculation filter	•	•	•
<b>Lighting</b>			
Type of lighting (W)	LED strip (14), dimmable	LED strip (23), dimmable	LED strip (23), dimmable
Lighting colour (K)	3,000	3,000	3,000
<b>Technical characteristics</b>			
Colour	8710 Anthracite (≈RAL 7016) 8711 White (≈RAL 9003)	8740 Anthracite (≈RAL 7016) 8741 White (≈RAL 9003)	8770 Anthracite (≈RAL 7016) 8771 White (≈RAL 9003)
Oblique front cover for handleless kitchens	•	•	•
Integrated motor	•	•	•
Weight cooker hood / motor casing (kg)	11	14	17
Mains voltage (V) / Electrical connection value (W)	230 / 115	230 / 124	230 /124
<b>Dimensions</b>			
Dimensions (W×D×H) (mm)	600×300/360×340	900×300/360×340	1200×300/360×340
Width cabinet (mm)	600	900	1200
Minimal/maximal depth cabinet (mm)	300–360	300–360	300–360
Thickness side panel cabinet (mm)	16–19	16–19	16–19
Exhaust opening diameter (mm)	150	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750

### Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
8710, 8711	Integrated motor	815	395 / 174	535 / 353	608 / 389	682 / 390	36 / 48	44 / 56	47 / 59	50 / 62
8740, 8741	Integrated motor	815	391 / 178	535 / 356	606 / 383	674 / 383	36 / 48	44 / 56	47 / 59	50 / 62
8770, 8771	Integrated motor	815	405 / 173	553 / 351	626 / 386	701 / 381	36 / 48	44 / 56	47 / 59	50 / 62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawings


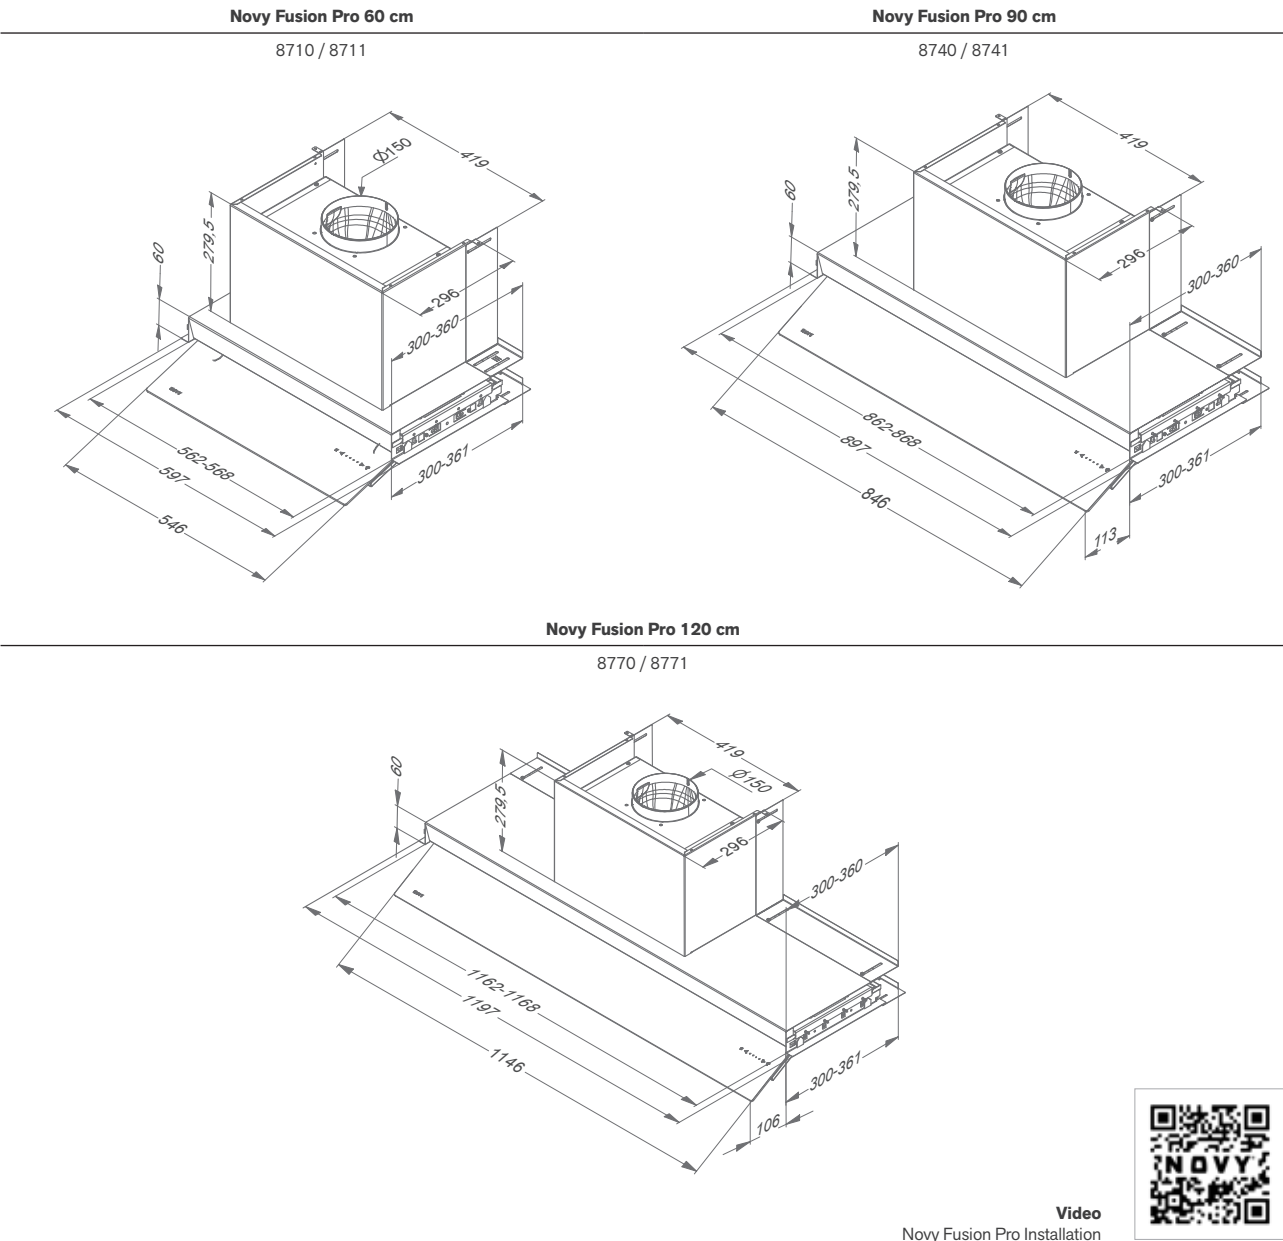






Accessories

	Reference	Price/pc	8710	8711	8740	8741	8770	8771
<b>Miscellaneous</b>								
Grease filter (replacement) (1 pc to order)	605.014	£69	▪	▪				
Grease filter (replacement) (2 pcs to order)	605.014	£69					▪	▪
Grease filter (replacement) (2 pcs to order)	609.014	£69			▪	▪		
Chimney extension antracite (fixation on shelf)	8840.8160	£194	▪		▪		▪	▪
Chimney extension white (fixation on shelf)	8840.8170	£194		▪		▪		
Remote control (white)	840.029	£104	▪	▪	▪	▪	▪	▪
Remote control (black)	840.049	£104	▪	▪	▪	▪	▪	▪
<b>Recirculation without exhaust box</b>								
Monoblock filter (also replacement)	8740.400	£194	▪	▪	▪	▪	▪	▪
Exhaust grill for upper cabinet*	906.450	£159	▪	▪	▪	▪	▪	▪
* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm								

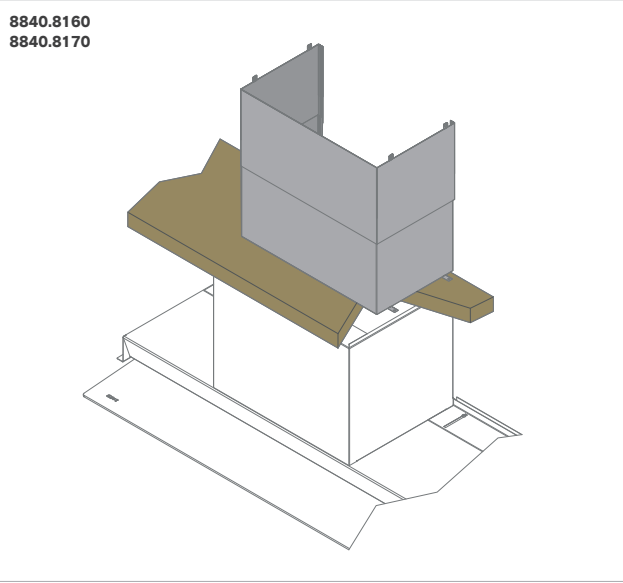



# Novy Fusion

- Can be invisibly integrated into a shallow wall cabinet with a built-in depth of only 32 cm
- Completely invisible in closed position
- Tilting cover in white glass for optimum capture of cooking vapours
- Subtle touch control
- LED strip (3,000 K), dimmable
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.





In option




Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	White / White glass	A	619	39	58	680	£1,314
90	Integrated	White / White glass	A	635	40	58	686	£1,559

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications

		
	<b>Novy Fusion 60 cm</b> 680 white glass	<b>Novy Fusion 90 cm</b> 686 white glass
<b>Functions</b>		
Controls	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	•	•
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•
<b>Lighting</b>		
Type of lighting (number/W)	LED strip (9), dimmable	LED strip (16), dimmable
Lighting colour (K)	3,000	3,000
<b>Technical characteristics</b>		
Colour	White	White
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	12.5	15.2
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 /126
<b>Dimensions (mm)</b>		
Dimensions (W×D×H) (mm)	520×280×320	820×280×320
Opening(W×D) (mm)	505×265	805×265
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / rear	Top / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Technical drawings

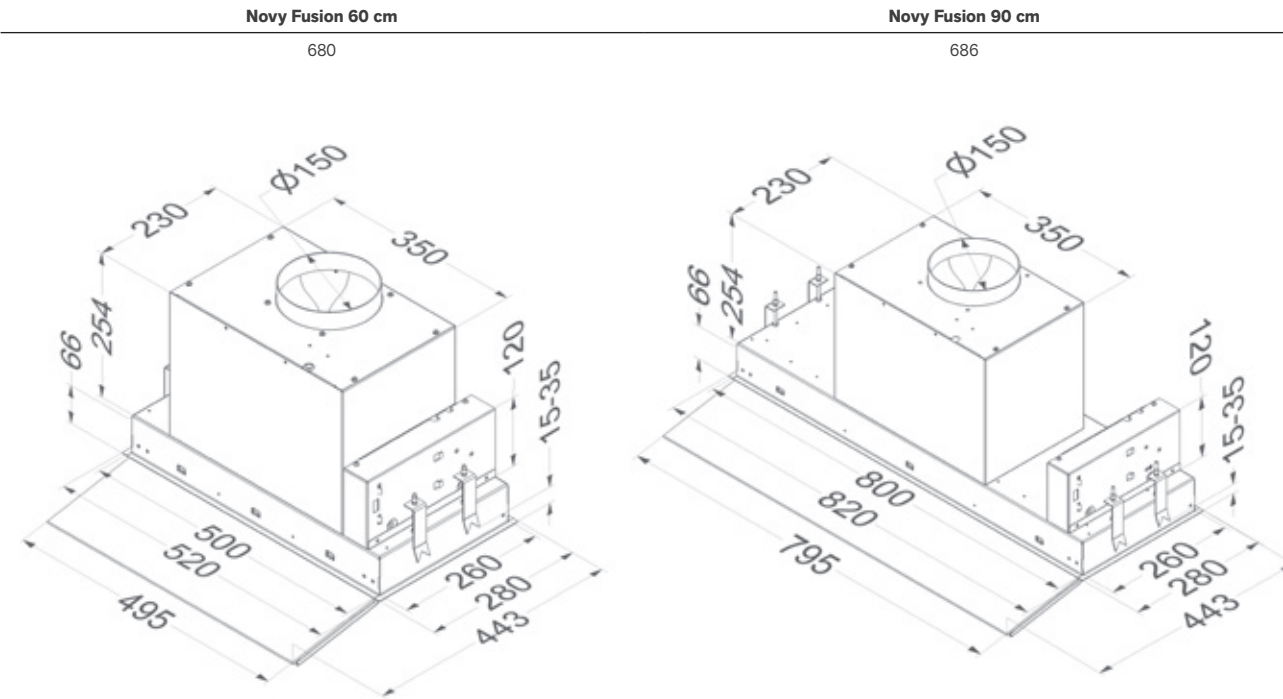

Accessories

	Reference	Price/pc	689	686
<b>Miscellaneous</b>				
Grease filter (replacement)	680.020	£104	•	
Grease filter (replacement) (2 pcs to order)	680.020	£104		•
Remote control (white)	840.029	£104	•	•
Remote control (black)	840.049	£104	•	•
<b>Recirculation without exhaust box</b>				
Monoblock filter (also replacement)	680.400	£184	•	•
Exhaust grill for upper cabinet*	906.450	£159	•	•

\* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
680	Integrated motor	815	245 / 83	408 / 246	537 / 397	619 / 391	27 / 39	38 / 51	46 / 58	49 / 61
686	Integrated motor	815	254 / 83	422 / 254	554 / 392	635 / 390	27 / 40	39 / 51	45 / 58	49 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.







# Novy Telescopic

- Can be integrated flush with the wall cabinet
- Telescopic slide for optimum capture of cooking vapours
- Front profile interchangeable to meet the design of your cabinets
- Sufficient space for a herb rack
- Glass visor for a transparent look
- LED lighting (2,700 K)
- Electronic control (663, 693) with extra functions
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours



**Distance**  
Maximum distance between cooker hood and hob.

**InTouch**  
Function for controlling the cooker hood from the hob for 663, 669 (optional)

**Recirculation**  
Recirculation is optional.




In option:  
663  
693




Width (cm)	Motor	Colour	Controls	EEI	Maximum Flow Rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
						Minimum	Maximum		
60	Integrated	Stainless steel	Knob	C	346	49	60	661	£909
	Integrated	Stainless steel	Knob	D	594	55	63	662	£1,154
	Integrated	Stainless steel	Buttons	C	614	47	58	663	£1,409
90	Integrated	Stainless steel	Knob	C	348	48	60	691 <sup>(3)</sup>	£1,124
	Integrated	Stainless steel	Knob	C	587	50	61	692	£1,434
	Integrated	Stainless steel	Buttons	C	605	43	55	693	£1,684

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.

Technical specifications

			
	Novy Telescopic 60 cm 661 stainless steel	Novy Telescopic 60 cm 662 stainless steel	Novy Telescopic 60 cm 663 stainless steel
Functions			
Controls	Knob	Knob	Buttons
Number of speed settings	3	3	3 + power function
Power setting with automatic downshift (min.)			6
With noise reduction	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs			Optional
Auto-Stop, automatic switch-off after 3 hours			▪
Run-on timer (min.)			10
Cleaning indicator for grease filter			▪
Replacement indicator for recirculation filter			▪
Lighting			
Type of lighting (number/W)	LED (2×2)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700	2,700
Technical characteristics			
Colour side profile	Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	12	13	13
Mains voltage (V) / Electrical connection value (W)	230 / 103	230 / 182	230 / 181
Dimensions			
Dimensions (W×D×H) (mm)	598×290×348	598×290×405	598×290×405
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×450	600×280×450	600×280×450
Opening (mm)	560-570×180	560-570×180	560-570×180
Exhaust opening diameter (mm)	125	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750


		
Novy Telescopic 90 cm 691 stainless steel	Novy Telescopic 90 cm 692 stainless steel	Novy Telescopic 90 cm 693 stainless steel
Knob	Knob	Buttons
3	3	3 + power function
▪	▪	▪
Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
		Optional
		▪
		10
		▪
		▪
LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700
Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
▪	▪	▪
16	18	18
230 / 101	230 / 194	230 / 200
898×290×348	898×290×348	898×290×348
900×280×450	900×280×450	900×280×450
860-870×180	860-870×180	860-870×180
125	150	150
Top	Top	Top
650–750	650–750	650–750
600–750	600–750	600–750
650–750	650–750	650–750

Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
661	Integrated motor	470	212 / 252	255 / 290	346 / 344		38 / 49	43 / 54	48 / 60	
662	Integrated motor	940	387 / 267	464 / 326	594 / 408		43 / 55	47 / 58	51 / 63	
663	Integrated motor	940	285 / 187	397 / 287	473 / 336	614 / 411	36 / 47	43 / 55	47 / 58	51 / 63
691	Integrated motor	470	215 / 273	257 / 318	348 / 379		36 / 48	41 / 52	48 / 60	
692	Integrated motor	940	353 / 313	423 / 347	587 / 397		39 / 50	43 / 55	50 / 61	
693	Integrated motor	940	259 / 153	356 / 225	436 / 262	605 / 318	32 / 43	39 / 50	43 / 55	50 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.


Technical drawings

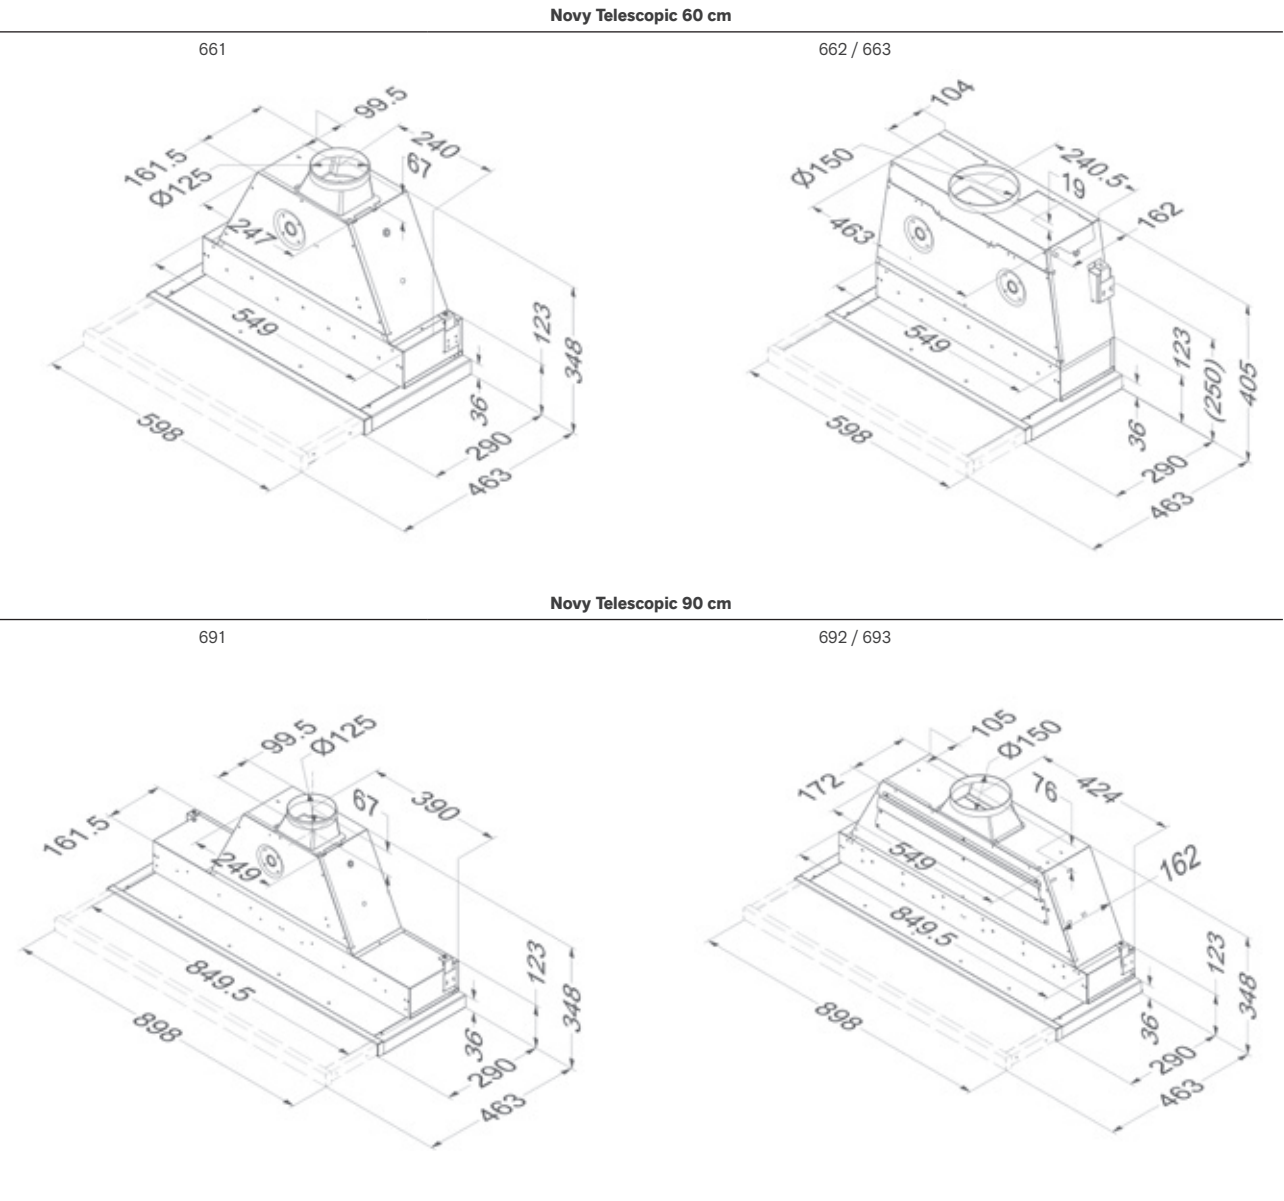

Accessories

	Reference	Price/pc	661	662	663	691	692	693
Miscellaneous								
Kit with LED lighting (4,000 K)	906.303	£79	•	•	•	•	•	•
Grease filter (replacement)	605.014	£69	•	•	•			
Grease filter (replacement) (2 pcs to order)	609.014	£69				•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£159			•			•
Kit connection with external cover and/or lighting	990.030	£169			•			•
Recirculation without exhaust box								
Kit with monoblock filters	662.400	£194	•	•	•			
Monoblock replacement filter for kit 662.400	662.060	£149	•	•	•			
Kit with monoblock filters	692.400	£239				•	•	•
Monoblock replacement filter for kit 692.400	692.060	£194				•	•	•
Exhaust grill for upper cabinet*	906.450	£159		•	•		•	•

\* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm

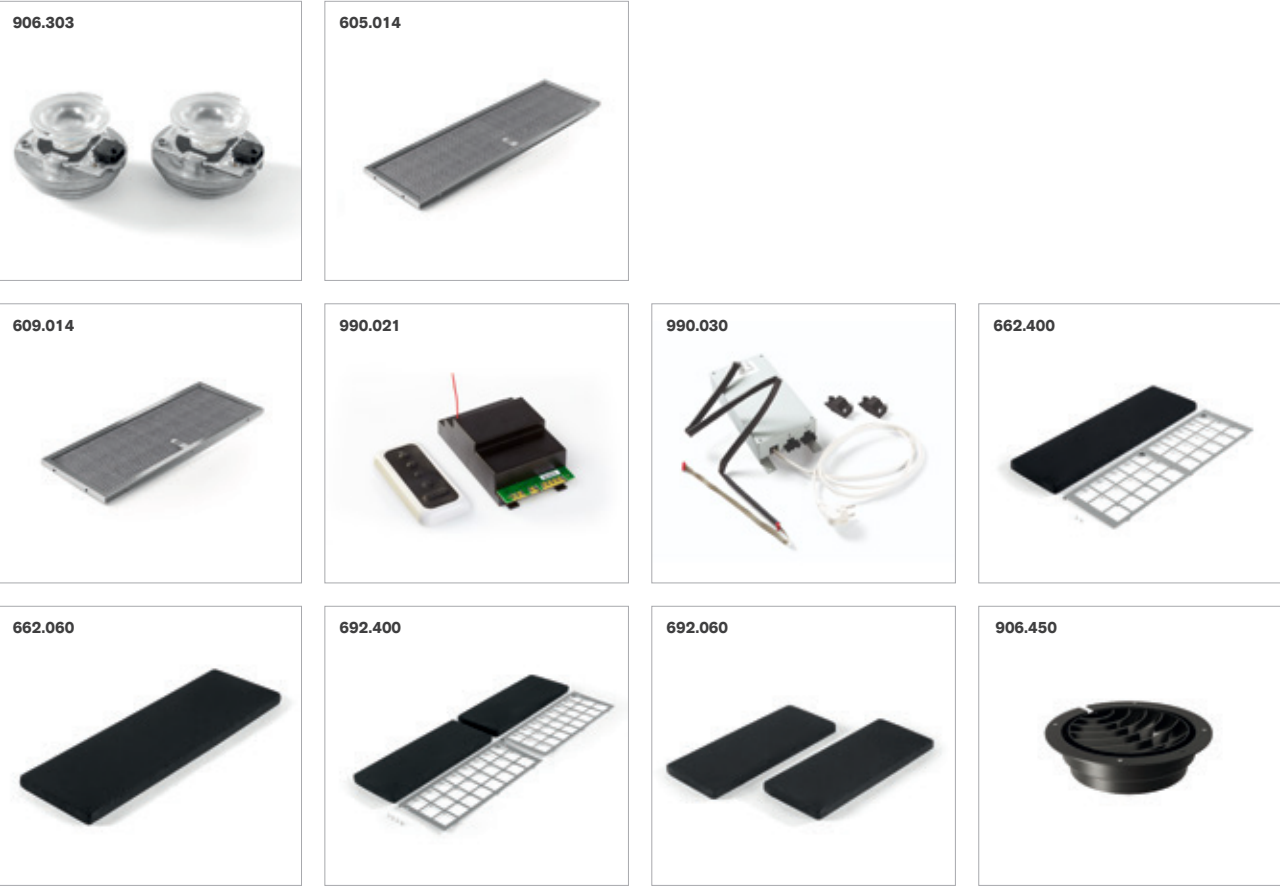





# Novy Telescopic Essence

- Can be integrated flush with the wall cabinet
- Telescopic slide for optimum capture of cooking vapours
- Sleek design filter for the optimum extraction of cooking vapours
- To be attached to intermediate shelf
- LED lighting (2,700 K)



**Distance**  
Maximum distance between cooker hood and hob.



**Recirculation**  
Recirculation is optional.




Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	501	33	56	650	£719
90	Integrated	Stainless steel	B	522	34	58	655 <sup>(3)</sup>	£779

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones. Provide for a kitchen cupboard with no bottom.

### Technical specifications

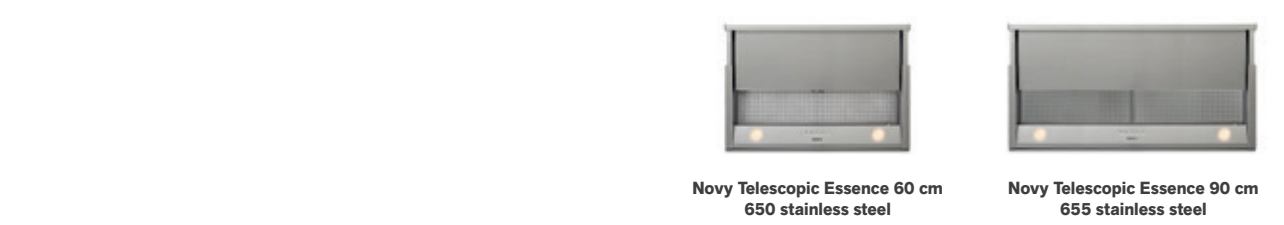

Functions		
Controls	Buttons	Buttons
Number of speed settings	4	4
Recirculation	Optional (carbon filter cartridge)	Optional (carbon filter cartridge)
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Lighting		
Type of lighting (number/W)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700

Technical characteristics		
Colour side profile	Stainless steel (not replaceable)	Stainless steel (not replaceable)
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	10	12
Mains voltage (V) / Electrical connection value (W)	230 / 162	230 / 165


Dimensions		
Dimensions (W×D×H) (mm)	598×290×316	898×290×316
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×300	900×280×300
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

### Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
650	Integrated motor	581	192 / 271	290 / 381	387 / 442	501 / 480	21 / 33	28 / 39	38 / 49	45 / 56
655	Integrated motor	581	206 / 282	303 / 374	405 / 445	522 / 482	23 / 34	31 / 42	42 / 53	46 / 58


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawings

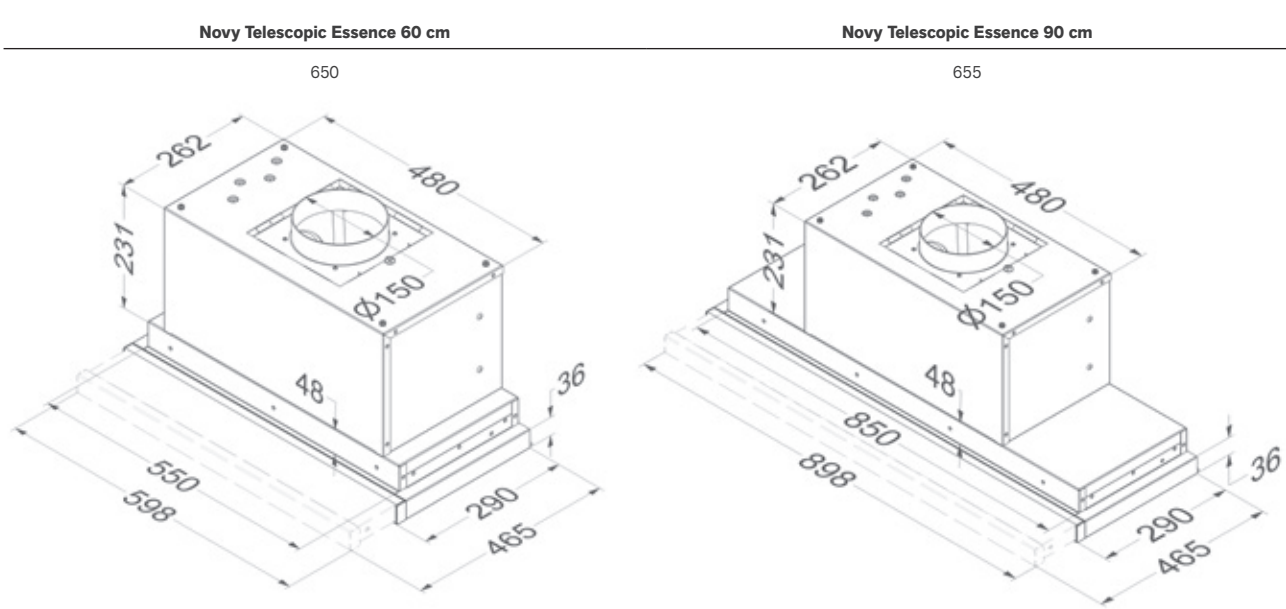

### Accessories

	Reference	Price/pc	650	655
<b>Miscellaneous</b>				
Kit with LED lighting (4,000 K)	906.303	£79	•	•
Grease filter (replacement)	650.020	£104	•	
Grease filter (replacement) (2 pcs to order)	655.020	£104		•
<b>Recirculation without exhaust box</b>				
Carbon cartridge (also replacement)	6200.055	£79	•	•
Exhaust grill for upper cabinet*	906.450	£159	•	•
* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm				

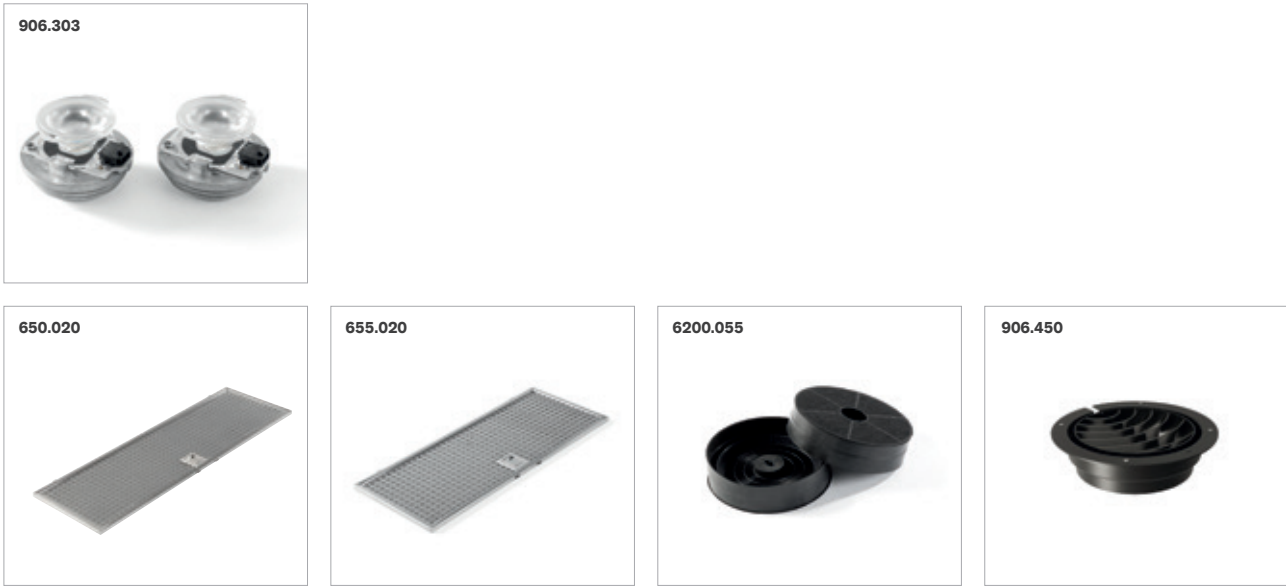



# Wall-mounted cooker hoods

Novy Vision

Novy Flatline

Novy Salsa



Width			
60 cm			<input type="checkbox"/>
75 cm	<input type="checkbox"/>		
90 cm	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
120 cm	<input type="checkbox"/>	<input type="checkbox"/>	
Colour			
White	<input type="checkbox"/>		
Stainless steel		<input type="checkbox"/>	<input type="checkbox"/>
Mineral Black		<input type="checkbox"/>	
Black	<input type="checkbox"/>		<input type="checkbox"/>
Motor			
Integrated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Not included	<input type="checkbox"/>	<input type="checkbox"/>	
Exhaust			
To the outside	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Recirculation	<input type="checkbox"/>	Optional	Optional

p. 170

p. 178

p. 184







# Novy Vision

- Modern, clean look
- Option to install without a chimney with an exhaust to the back
- Models with recirculation as standard, making an exhaust to the outside unnecessary (carbon filter with a life span of up to 900 cooking hours)
- Subtle LED lighting (2,700 K)







**Distance**  
Maximum distance between cooker hood and hob.





**InTouch**  
Function for controlling the cooker hood from the hob in option




**Recirculation**  
Standard for: 7856, 7858, 7859, 7836, 7838, 7839, 7848, 7849










In option



Sound level during normal use in dB(A) (re 1 pW)								
Width (cm)	Motor	Colour	EEl	Flow power function (m³/h)	Minimum	Maximum	Ref.	Price/pc
75	Integrated	Black / stainless steel	A+	788	35	51	7850 <sup>(3)</sup>	£1,444
	Integrated	Black / black	A+	788	35	51	7853 <sup>(3)</sup>	£1,444
	Integrated	White / stainless steel	A+	788	35	51	7851 <sup>(3)</sup>	£1,444
	Integrated	Black / stainless steel		478	45	64	7858 <sup>(3)</sup> Recirculation	£1,444
	Integrated	Black / black		478	45	64	7856 <sup>(3)</sup> Recirculation	£1,444
	Integrated	White / stainless steel		478	45	64	7859 <sup>(3)</sup> Recirculation	£1,444
90	Integrated	Black / stainless steel	A+	780	35	51	7830	£1,894
	Integrated	Black / black	A+	780	35	51	7833	£1,894
	Integrated	White / stainless steel	A+	780	35	51	7831	£1,894
	Not included	Black / stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7835 <sup>(1)</sup>	£1,444
	Integrated	Black / stainless steel		490	45	66	7838 Recirculation	£1,894
	Integrated	Black / black		490	45	66	7836 Recirculation	£1,894
	Integrated	White / stainless steel		490	45	66	7839 Recirculation	£1,894
120	Integrated	Black / stainless steel	A+	784	32	52	7840	£2,359
	Integrated	White / stainless steel	A+	784	32	52	7841	£2,359
	Integrated	Black / stainless steel		490	45	66	7848 Recirculation	£2,359
	Integrated	White / stainless steel		490	45	66	7849 Recirculation	£2,359

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.  
(3) These models are only to be used above a hob up to 65 cm wide and with up to 4 cooking zones.

Technical specifications



Functions			
Controls	Touch control	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	▪	▪	▪
Recirculation		▪ (monoblock)	
InTouch function for hobs	Optional	Optional	Optional
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪
Run-on timer (min.)	10	30	10
Cleaning indicator for grease filter	▪	▪	▪
Replacement indicator for recirculation filter		▪	

Lighting			
Type of lighting (number/W)	LED (2×2)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700	2,700

Technical characteristics			
Integrated motor	▪	▪	▪
Motor not included (suitable for wall motor, flat roof motor outside)			
Weight cooker hood / motor casing (kg)	27.5	22.5	30
Mains voltage (V) / Electrical connection value (W)	230 / 325	230 / 200	230 / 305

Dimensions			
Dimensions (B×D) (mm)	748×426	748×426	898×426
Height of the cooker hood (Hmin–Hmax) (mm)	517 (Rear exhaust) / 830–1100 (Top exhaust)	517	517 (Rear exhaust) / 830–1100 (Top exhaust)
Maximum height with shaft extension (mm) optional	1390		1390
Exhaust opening diameter (mm)	150		150
Exhaust position	Top / rear	Top	Top / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750



Touch control	Touch control	Touch control	Touch control
3 + power function	3 + power function	3 + power function	3 + power function
6	6	6	6
▪	▪	▪	▪
	▪ (monoblock)		▪ (monoblock)
Optional	Optional	Optional	Optional
▪	▪	▪	▪
10	30	10	30
▪	▪	▪	▪
	▪		▪

LED (2×2)	LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700	2,700

	▪	▪	▪
▪			
25 + motor	25	32.5	27.5
230 / 7 + motor	230 / 200	230 / 325	230 / 200



898×426	898×426	1198×426	1198×426
517 (Rear exhaust) / 830–1100 (Top exhaust)	517	517 (Rear exhaust) / 830–1100 (Top exhaust)	517
1390		1390	
150		150	
Top / rear	Top	Top / rear	Top
500–750	500–750	500–750	500–750
500–750	500–750	500–750	500–750
650–750	650–750	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7850, 7853, 7851	Integrated motor	800	248 / 327	333 / 492	495 / 550	788 / 577	25 / 35	33 / 43	40 / 51	51 / 62
7858, 7856, 7859	Integrated motor	800	126	191	418	478	34 / 45	45 / 55	53 / 64	59 / 70
7830, 7833, 7831	Integrated motor	800	245 / 332	348 / 505	500 / 567	780 / 586	25 / 35	32 / 42	41 / 51	51 / 62
7835	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7838, 7836, 7839	Integrated motor	800	124	196	394	490	34 / 45	45 / 55	55 / 66	59 / 70
7840, 7841	Integrated motor	800	239 / 321	318 / 501	483 / 558	784 / 589	25 / 32	32 / 42	41 / 52	51 / 62
7848, 7849	Integrated motor	800	124	196	394	490	35 / 45	45 / 55	56 / 66	60 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

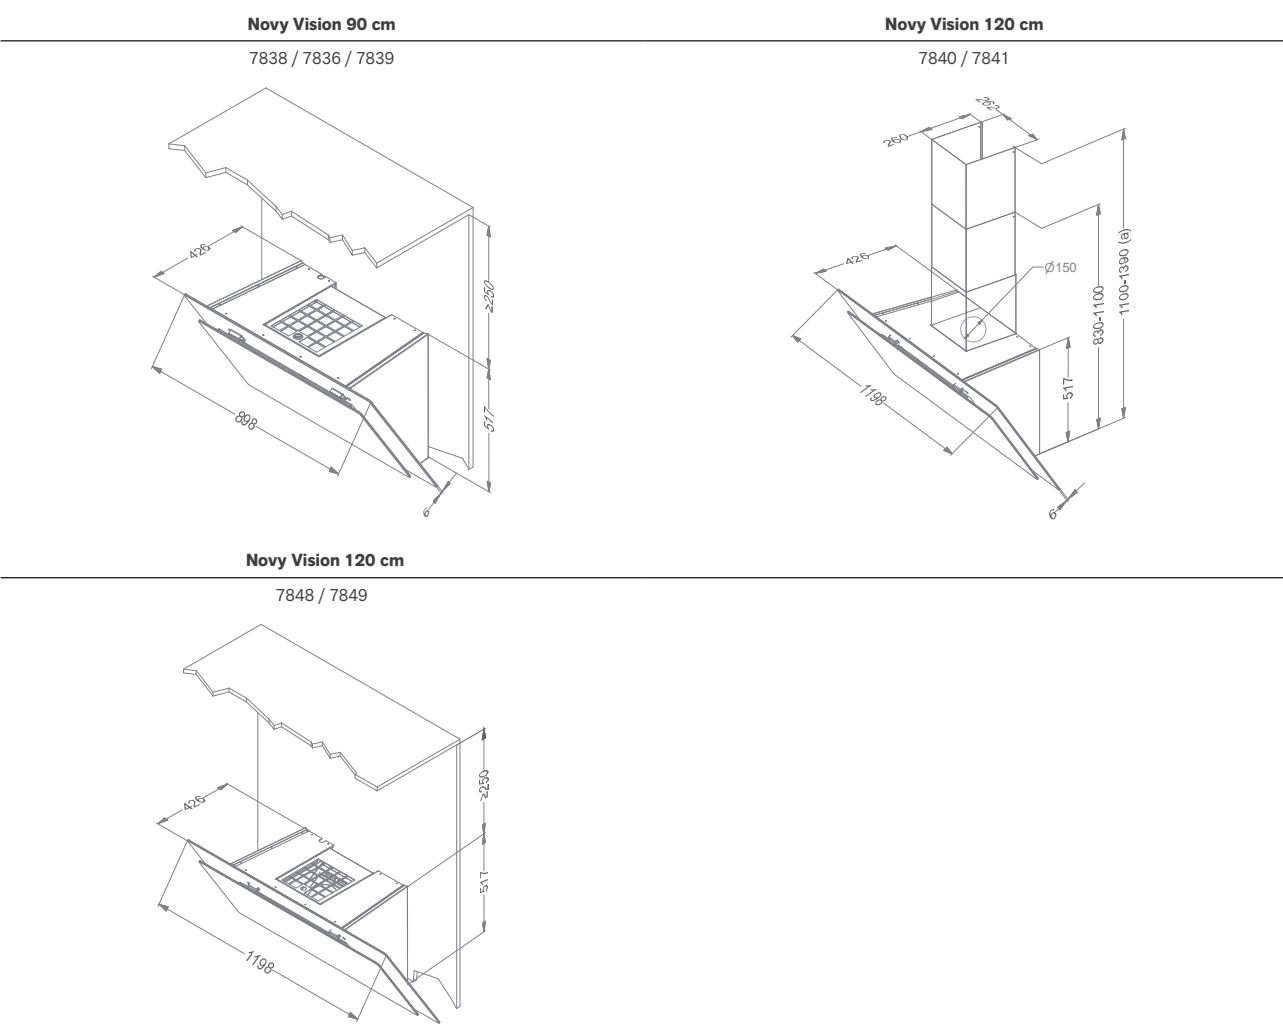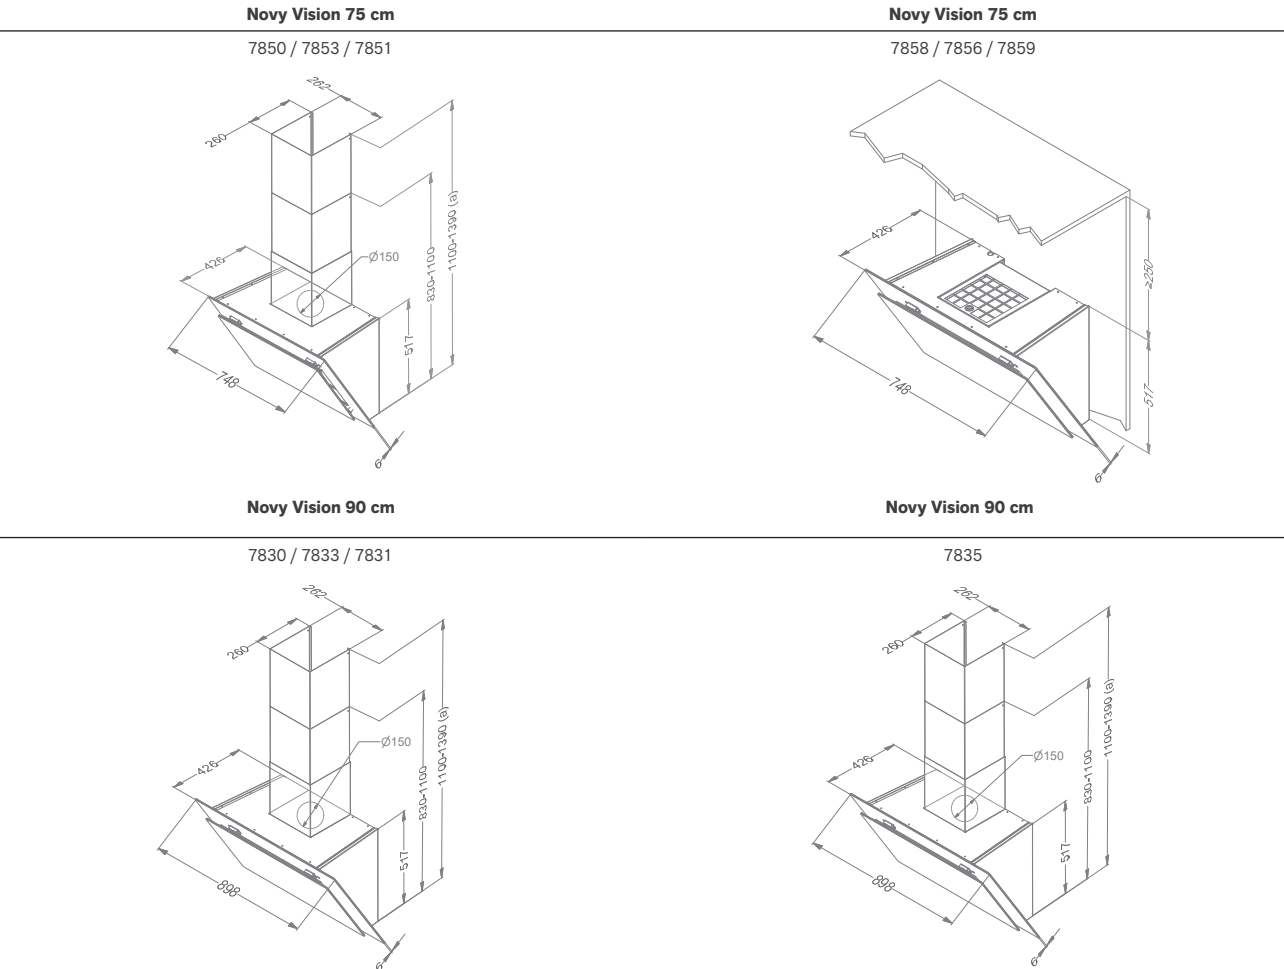

Electrical connection

With exhaust to the outside

- Option 1
- The cooker hood is mounted with a chimney and the air outlet is upwards.
  - The mains socket is placed behind the chimney.
- Option 2
- The cooker hood is mounted without a chimney and the air outlet is to the rear.
  - The mains socket is placed directly above the cooker hood (minimum distance 30mm).

Recirculation

- Electrical connection of the cooker hood
- The mains socket is placed directly above the cooker hood (minimum distance 30mm).

a) With chimney extension

a) With chimney extension  
(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).  
The air volume/noise level depends on the type of motor and installation.



Accessories

	Reference	Price/pc	7850 / 7851	7853	7858 / 7859	7856	7830 / 7831	7833	7835	7838 / 7839	7836	7840 / 7841	7848 / 7849
<b>Motor at a distance</b>													
Remote motor for inside	245.999	£654							•				
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064							•				
Roof motor 48.8 cm height	745.999	£1,784							•				
Roof motor with noise reduction 78.4 cm height	755.999	£2,049							•				

Accessories

	Reference	Price/pc	7850 / 7851	7853	7858 / 7859	7856	7830 / 7831	7833	7835	7838 / 7839	7836	7840 / 7841	7848 / 7849
<b>Miscellaneous</b>													
Kit with LED lighting (4,000 K)	906.303	£79	•	•	•	•	•	•	•	•	•	•	•
Chimney extension stainless steel	7830.100	£329	•				•		•			•	
Chimney extension black	7833.100	£404		•				•					
Grease filter (replacement) (2 pcs to order)	7830.020	£69	•	•	•	•	•	•	•	•	•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£159	•	•	•	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49								•			
<b>Recirculation</b>													
Monoblock replacement filter	7400.055	£159			•	•				•	•		•







# Novy Flatline

- Extra slim lines
- Seamless finish
- Subtle looking LED lighting (2,700 K)
- Reversible chimney for recirculation as standard
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours






**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.









In option







Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	635	35	55	7600	£1,994
	Integrated	Mineral Black	A+	635	35	55	7602	£2,164
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7605	£1,694
120	Integrated	Stainless steel	A+	631	36	55	7610	£2,299
	Integrated	Mineral Black	A+	631	36	55	7612	£2,409
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7615	£2,029

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical specifications

			
Novy Flatline wall 90 cm 7600 stainless steel / 7602 Mineral Black (≈RAL 9005)	Novy Flatline wall 90 cm 7605 stainless steel Motor not included	Novy Flatline wall 120 cm 7610 stainless steel / 7612 Mineral Black (≈RAL 9005)	Novy Flatline wall120 cm 7615 stainless steel Motor not included

Functions				
Controls	Buttons	Buttons	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪	▪	▪	▪
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700	2,700	2,700	2,700

Technical characteristics				
Colour	7600 stainless steel 7602 Mineral Black (≈RAL 9005)	7605 stainless steel	7610 stainless steel 7612 Mineral Black (≈RAL 9005)	7615 stainless steel
Integrated motor	▪		▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪		▪
Weight cooker hood / motor casing (kg)	30	27 + motor	38.5	35.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 12 + motor	230 / 117	230 / 12 + motor





Dimensions				
Dimensions (W×D×H) (mm)	898×554	898×554	1198×554	1198×554
Height of the cooker hood (Hmin–Hmax) (mm)	660–1050	660–1050	660–1050	660–1050
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	730–1120		730–1120	
Maximum height with shaft extension (mm) optional	1410	1410	1410	1410
Maximum height with shaft extension with recirculation (mm) optional	1480		1480	
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
7600, 7602	Integrated motor	815	233 / 70	415 / 240	551 / 384	635 / 385	24 / 35	36 / 47	44 / 55	46 / 57
7605	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7610, 7612	Integrated motor	815	259 / 83	420 / 247	550 / 380	631 / 381	26 / 36	38 / 49	44 / 55	48 / 59
7615	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

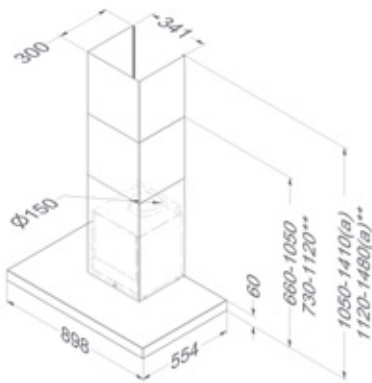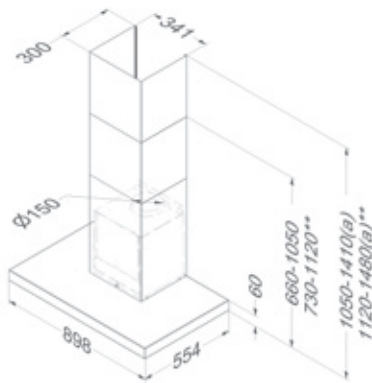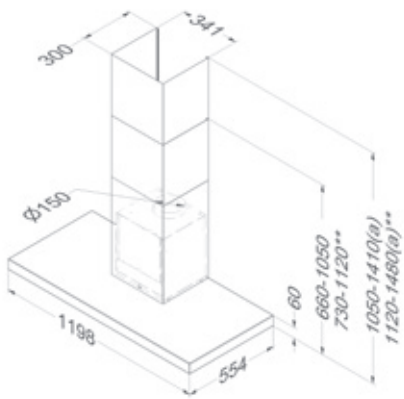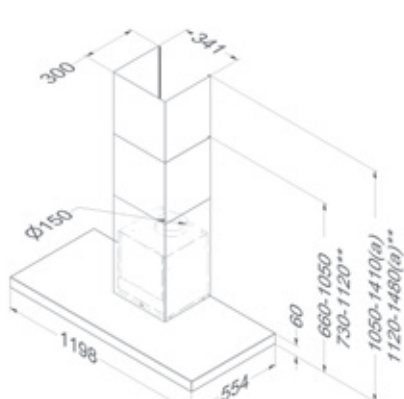Novy Flatline wall 90 cm	
	
7600 / 7602	7605
Novy Flatline wall 120 cm	
	
7610 / 7612	7615

a) With chimney extension - \*\*With recirculation  
(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).  
The air volume/noise level depends on the type of motor and installation.



## Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
Motor at a distance								
Remote motor for inside	245.999	£654			•			•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•			•
Roof motor 48.8 cm height	745.999	£1,784			•			•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•			•
Miscellaneous								
Chimney extension Stainless steel	7600.100	£274	•		•	•		•
Chimney extension Mineral Black	7602.150	£284		•			•	
Grease filter (replacement)	7530.020	£74	•	•	•	•	•	•
Kit with LED lighting (4,000 K)	906.307	£159	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•			•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•



## Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
<b>Recirculation</b>								
Recirculation kit	7600.400	£219	•	•		•	•	
Monoblock replacement filter	7600.060	£159	•	•		•	•	







# Novy Salsa

- Slim design
- High quality simplicity
- Easy and simple control
- Reversible chimney for recirculation as standard
- Subtle LED lighting (3,000 K)





**Distance**  
Maximum distance between cooker hood and hob.





**Recirculation**  
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	A	617	48	58	6500	£1,089
90	Integrated	Stainless steel	A	640	45	57	6510	£1,199
	Integrated	Black	A	640	45	57	6512	£1,389

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical specifications


 			
<b>Novy Salsa wall 60 cm</b> <b>6500 stainless steel</b>		<b>Novy Salsa wall 90 cm</b> <b>6510 stainless steel</b> <b>6512 black</b>	
<b>Functions</b>			
Controls	Buttons		Buttons
Number of speed settings	3 + power function		3 + power function
Power setting with automatic downshift (min.)	5		5
Recirculation	Optional (Carbon cartridge replacement)		Optional (Carbon cartridge replacement)
Run-on timer (min.)	5, 10, 15, 20		5, 10, 15, 20
Cleaning indicator for grease filter	•		•
Replacement indicator for recirculation filter	•		•
<b>Lighting</b>			
Type of lighting (number/W)	LED (2×2)		LED (3×2)
Lighting colour (K)	3,000		3,000
<b>Technical characteristics</b>			
Colour	6500 stainless steel		6510 stainless steel 6512 black (≈RAL 9005)
Integrated motor	•		•
Weight cooker hood / motor casing (kg)	18		20
Mains voltage (V) / Electrical connection value (W)	230 / 210		230 / 241
<b>Dimensions</b>			
Dimensions (B×D) (mm)	598×520		898×520
Height of the cooker hood (Hmin–Hmax) (mm)	710–1140		710–1140
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	765–1205		765–1205
Maximum height with shaft extension (mm) optional	1460		1460
Maximum height with shaft extension with recirculation (mm) optional	1525		1525
Exhaust opening diameter (mm)	150		150
Exhaust position	Top		Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750		650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750		600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750		650–750

### Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6500	Integrated motor	700	244 / 403	318 / 468	419 / 512	617 / 549	36 / 48	41 / 53	47 / 58	55 / 67
6510, 6512	Integrated motor	700	248 / 413	329 / 466	423 / 505	640 / 544	33 / 45	38 / 51	44 / 57	54 / 66

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawings

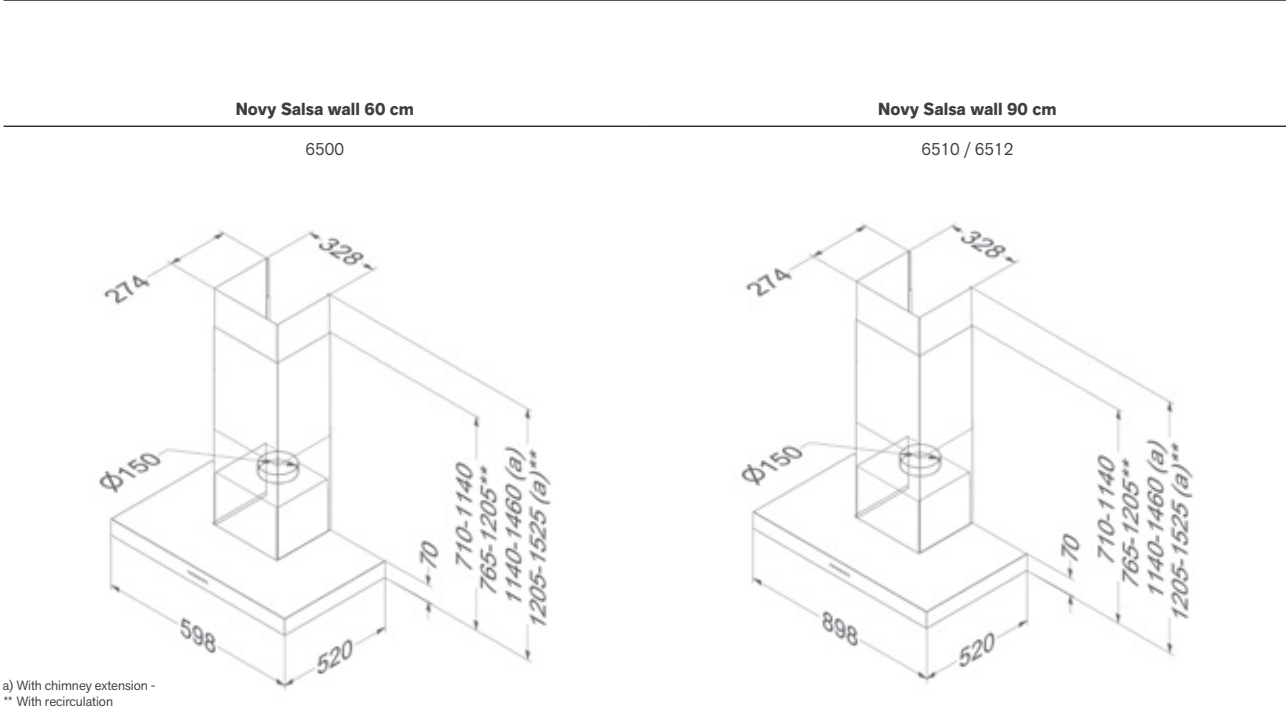

### Accessories

	Reference	Price/pc	6500	6510	6512
<b>Motor at a distance</b>					
Chimney extension Stainless steel	6200.100	£284	•	•	
Chimney extension Black	6512.100	£329			•
Grease filter (replacement)	6200.020	£69	•		
Grease filter (replacement) (2 pcs to order)	6200.020	£69		•	•
<b>Recirculation</b>					
Recirculation kit	6200.400	£159	•	•	•
Carbon cartridge replacements (replacement)	6200.055	£79	•	•	•







# Island cooker hoods

## Novy Phantom



## Novy Pureline Frame



## Novy Mood



## Novy Flatline



Width				
90 cm				■
100 cm				■
108 cm			■	
120 cm				■
130 cm	■			
Colour				
White			■	
Stainless steel				■
Mineral Black	■	■	■	■
Motor				
Integrated	■	■	■	■
Not included				■
Exhaust				
To the outside				■
Recirculation	■	■	■	Optional

p. 190

p. 196

p. 204

p. 208



NOVY

PREMIUM  
INNOVATION  
PRODUCT

Novy Phantom Frame & Novy Phantom Cable / Island cooker hoods



190 – 191

# Novy Phantom Frame & Novy Phantom Cable



- Light translucent glass for an eye-catcher in the kitchen
- Novy Phantom Frame has a subtle frame for an industrial look
- Novy Phantom Cable has an height-adjustable steel cable for a floating effect
- Four corner spotlights bring the box-in-box design to life (2,700 K)
- Dimmable LED strip creates ambient upward scattered light (2,700 K)
- Functional dimmable cooking light - colour intensity can be selected (2,700 K to 4,000 K)
- Integrated recirculation solution for optimal energy efficiency (carbon filter with a life span of up to 900 cooking hours)
- Operation possible via Novy Connect App, as well as via remote control



**Distance**  
Maximum distance  
between cooker hood  
and hob.



**InTouch**  
Standard with function  
for controlling the cooker  
hood from the hob.



**Recirculation**  
Standard with recirculation.



**Novy Connect**  
Operation and settings  
possible via smartphone  
or tablet.



	Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	maximum		
Phantom Frame	130	Integrated	Mineral Black	501	40	59	7540	£4,039
Phantom Cable	130	Integrated	Mineral Black	501	40	59	7530	£3,534

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Phantom



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOODS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOBS



DESIGNER  
LIGHTING



INFO



Technical specifications



Functions		
Controls	Remote control (black) / Novy Connect	Remote control (black) / Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	•	•
Recirculation	• (monoblock)	• (monoblock)
InTouch function for hobs	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Functional lighting		
Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable lighting	•	•
Lighting colour (K)	Default setting 2,700 (adjustable between 2,700 and 4,000)	Default setting 2,700 (adjustable between 2,700 and 4,000)

Mood lighting		
Corner spots: Type of lighting (number/W)	LED (4×2)	LED (4×2)
Led strip: Type of lighting (W)	LED (43)	LED (43)
Dimmable lighting	•	•
Lighting colour (K)	2.700	2.700

Technical characteristics		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	51	45
Mains voltage (V) / Electrical connection value (W)	230 / 159	230 / 159


Dimensions		
Dimensions (B×D) (mm)	1302×475	1302×475
Height of the cooker hood (glass box) (mm)	332	332
Minimum total height of the cooker hood (mm)	582	582
Maximum total height of the cooker hood (mm)	1,650	1,850
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850

Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7540, 7530	Integrated motor	815	142	280	393	501	27 / 40	41 / 53	46 / 59	50 / 63

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

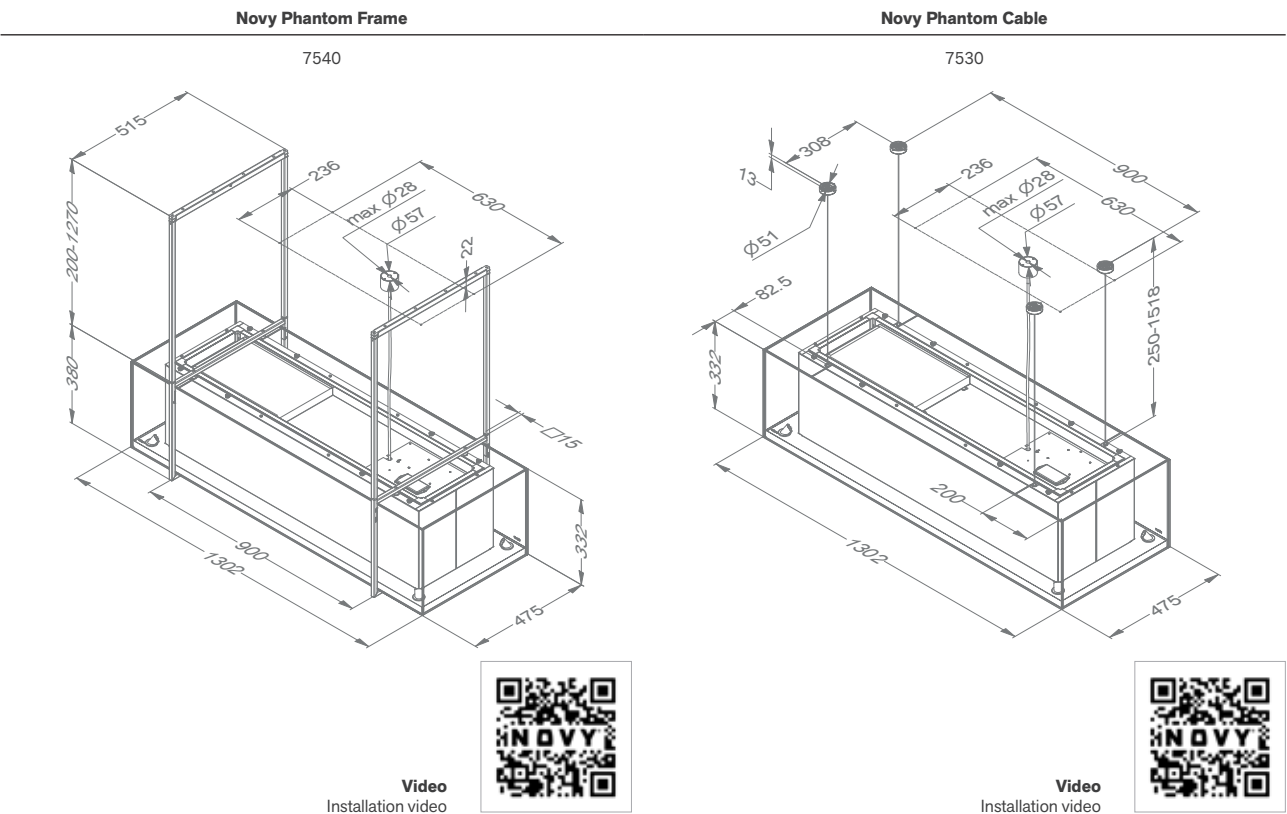





Accessories

	Reference	Price/pc	7540	7530
<b>Miscellaneous</b>				
Grease filter (replacement)	7530.020	£74	•	•
Kit of longer suspension cables (4 × 3.5 m)	7530.100	£119		•
Ceiling plate Mineral Black	7530.500	£249		•
Remote control (white)	840.029	£104	•	•
<b>Recirculation</b>				
Monoblock replacement filter	7300.055	£169	•	•





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Pureline Frame

- Width and arrangement can be adapted to individual needs thanks to modular construction
- Sheet material is an important part of the kitchen, therefore it is not included in the delivery, but provided by your professional kitchen fitter
- Optimum efficiency even with wide cooking surfaces (fume hood range B 90/120cm and D 50cm)
- Dimmable LED illumination warm white (2,700 K), adjustable to neutral white (4,000 K) for illumination of worktop
- Integrated recirculation solution for optimal energy efficiency (carbon filter with a life span of up to 900 cooking hours)



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Standard with recirculation.



Width (cm) cooker hood	Motor	Colour	Frame (number)	Frame height (cm)	Lighting kits (number)	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc.
							Minimum	maximum		
90	Integrated	Mineral Black	2	70	-	520	39	59	15001	£3,534
	Integrated	Mineral Black	3	70	1	520	39	59	15003	£3,834
	Integrated	Mineral Black	4	70	2	520	39	59	15005	£4,644
	Integrated	Mineral Black	2	80	-	520	39	59	15007	£3,534
	Integrated	Mineral Black	3	80	1	520	39	59	15009	£3,834
	Integrated	Mineral Black	4	80	2	520	39	59	15011	£4,644
120	Integrated	Mineral Black	2	70	-	520	39	59	15002	£4,039
	Integrated	Mineral Black	3	70	1	520	39	59	15004	£4,139
	Integrated	Mineral Black	4	70	2	520	39	59	15006	£4,949
	Integrated	Mineral Black	2	80	-	520	39	59	15008	£4,039
	Integrated	Mineral Black	3	80	1	520	39	59	15010	£4,139
	Integrated	Mineral Black	4	80	2	520	39	59	15012	£4,949



Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Pureline Frame









Technical specifications

		
	<b>Cooker hood 90 cm</b> <b>15001 frame height 70 cm /</b> <b>15007 frame height 80 cm</b>	<b>Cooker hood 120 cm</b> <b>15002 frame height 70 cm /</b> <b>15008 frame height 80 cm</b>
<b>Funcities</b>		
Controls	Buttons + Remote control (black)	Buttons + Remote control (black)
Number of speed settings	3 + powerfunction	3 + powerfunction
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	▪ (Monoblock)	▪ (Monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪
<b>Lighting cooker hood</b>		
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2.700 or 4.000	2.700 or 4.000
<b>Lighting shelf</b>		
Type of lighting (number/W)		
Lighting colour (K)		
Operation		
<b>Technical characteristics</b>		
Number of frames	2	2
Colour	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Ceiling cap electrical connection	▪	▪
Power cord length (mm)	180	180
Weight excl. shelf* (kg)	53	57
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 117
<b>Dimensions</b>		
Dimensions cooker hood (W×D×H) (mm)	868×508	1168×508
Opening lower shelf (W×D) (mm)	845×485	1145×485
Dimensions housing cooker hood (W×D×H) (mm)	872×556×330	1172×556×330
Exhaust opening top shelf (W×D) (mm)	401×248	401×248
Exhaust position	Top	Top
<b>Dimensions frame</b>		
Dimensions (W×D) (mm)	25×806	25×806
Dimensions (H) (mm)	700 or 800	700 or 800
Depth of shelf material (mm)*	750	750
Thickness of shelf material (mm)*	18-25	18-25
<b>Installation height</b>		
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	650–850	650–850
Installation height with gas hob (Hmin–Hmax) (mm)	650–850	650–850

\* Provide the shelf yourself, taking into account sufficient bearing capacity and the correct thickness.

			
<b>Cooker hood 90 cm</b> <b>15003 frame height 70 cm /</b> <b>15009 frame height 80 cm</b>	<b>Cooker hood 120 cm</b> <b>15004 frame height 70 cm /</b> <b>15010 frame height 80 cm</b>	<b>Cooker hood 90 cm</b> <b>15005 frame height 70 cm /</b> <b>15011 frame height 80 cm</b>	<b>Cooker hood 120 cm</b> <b>15006 frame height 70 cm /</b> <b>15012 frame height 80 cm</b>
Buttons + Remote control (black)	Buttons + Remote control (black)	Buttons + Remote control (black)	Buttons + Remote control (black)
3 + powerfunction	3 + powerfunction	3 + powerfunction	3 + powerfunction
6	6	6	6
▪	▪	▪	▪
▪ (Monoblock)	▪ (Monoblock)	▪ (Monoblock)	▪ (Monoblock)
▪	▪	▪	▪
▪	▪	▪	▪
30	30	30	30
▪	▪	▪	▪
▪	▪	▪	▪
LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
2.700 or 4.000	2.700 or 4.000	2.700 or 4.000	2.700 or 4.000
LED (3×2) / dimmable	LED (3×2) / dimmable	LED (6×2) / dimmable	LED (6×2) / dimmable
2.700 or 4.000	2.700 or 4.000	2.700 or 4.000	2.700 or 4.000
Simultaneously with cooker hood	Simultaneously with cooker hood	Simultaneously with cooker hood	Simultaneously with cooker hood
3	3	4	4
Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)
▪	▪	▪	▪
▪	▪	▪	▪
180	180	180	180
61	66	69	74
230 / 123	230 / 123	230 / 129	230 / 129
868×508	1168×508	868×508	1168×508
845×485	1145×485	845×485	1145×485
872×556×330	1172×556×330	872×556×330	1172×556×330
401×248	401×248	401×248	401×248
Top	Top	Top	Top
25×806	25×806	25×806	25×806
700 or 800	700 or 800	700 or 800	700 or 800
750	750	750	750
18-25	18-25	18-25	18-25
650–850	650–850	650–850	600–850
650–850	650–850	650–850	600–850
650–850	650–850	650–850	600–850




Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
15001, 15003, 15005, 15007, 15009, 15011	90 cm cooker hood	815	251	363	423	497	35 / 47	43 / 55	46 / 58	49 / 61
15002, 15004, 15006, 15008, 15010, 15012	120 cm cooker hood	815	252	379	445	508	35 / 47	42 / 54	45 / 58	48 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

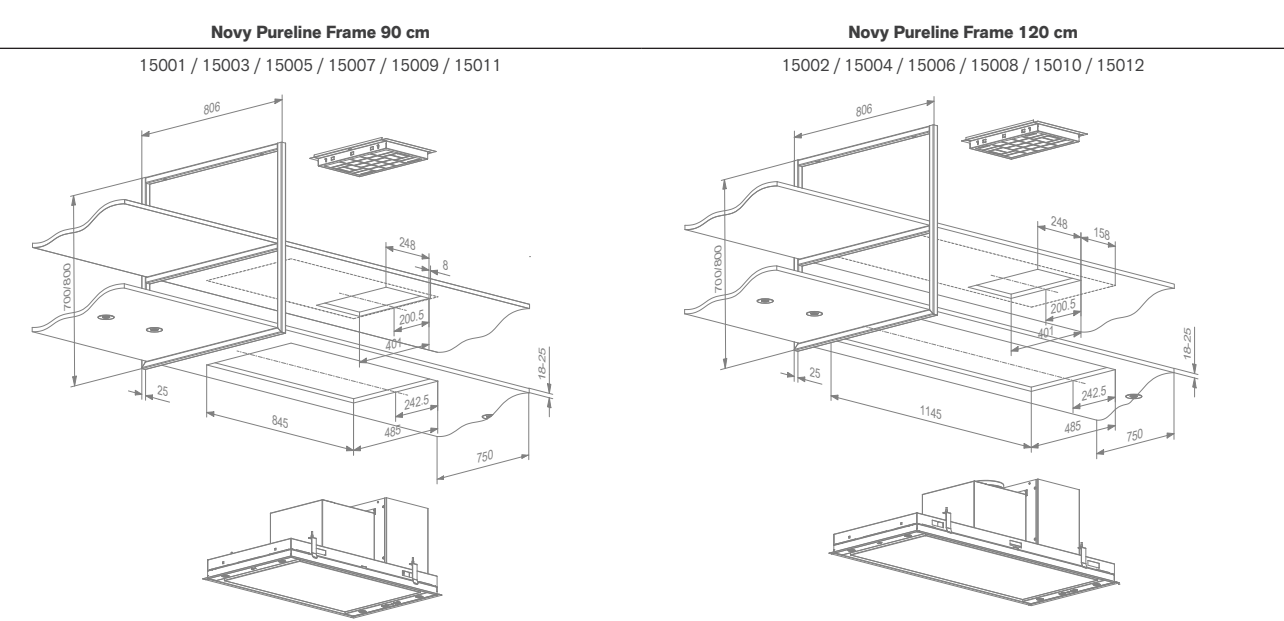

Accessories

	Reference	Price/pc	15001 15003 15005 15007 15009 15011	15002 15004 15006 15008 15010 15012
<b>Miscellaneous</b>				
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•
Monoblock replacement filter	7300.055	£169	•	•
Remote control (white)	840.029	£104	•	•


6830.020

7300.055

840.029

Video  
Installation video

In detail

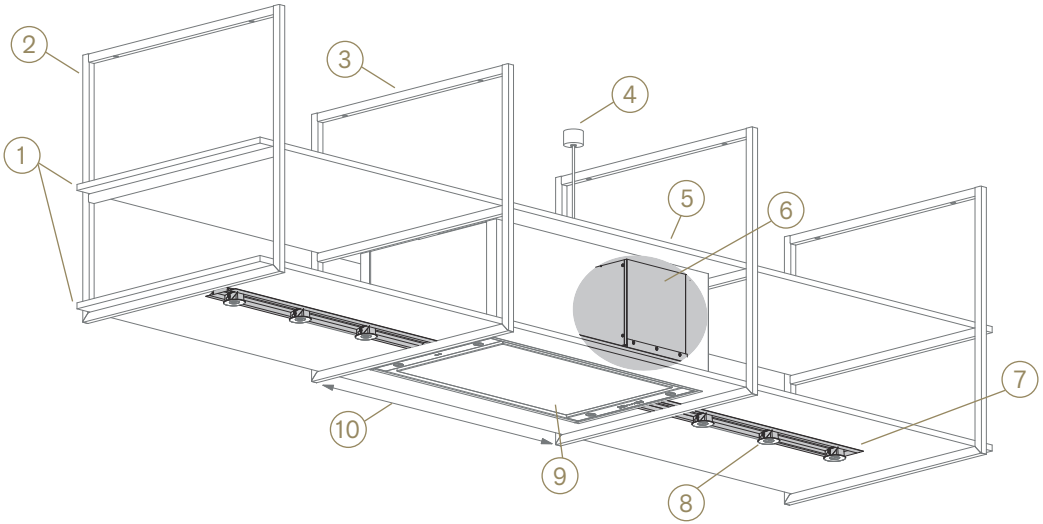


- ① Creative filling in of sheet material by professional kitchen fitter (thickness 18-25 mm / width 750 mm)
- ② Mineral Black (≈RAL 9005) painted ceiling frame (thickness 25 mm). Height frame 700 or 800 mm.
- ③ Width and arrangement can be adapted to individual needs thanks to modular construction (painted ≈ RAL 9005)
- ④ Black ceiling cap for electrical connection
- ⑤ Integrated recirculation solution for optimal energy efficiency
- ⑥ Behind the housing of the cooker hood you will find the motor and recirculation box
- ⑦ Tight cover for LED lights and connection. Easy to shorten
- ⑧ Dimmable LED lighting warm white (2,700 K), adjustable to neutral white (4,000 K) for worktop lighting. Each lighting kit contains 3 LEDs including wiring (number of lighting kits depends on the model). Depending on the design requirements, 2 or 3 LEDs can be fitted. Important note for the 4-frame model: the same number of spotlights must be used for both lighting sets.
- ⑨ Optimal efficiency even with wide cooking surfaces (fume hood range B 90/120cm and D 50cm)
- ⑩ Recommended maximum width distance frames between cooker hood is 1250 mm




# Customise your Novy Pureline Frame


- 1 Determine the number and height of the frames

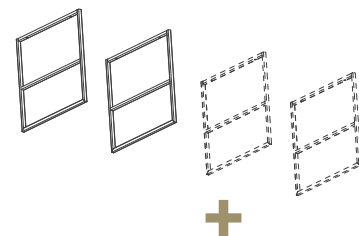



- 2 Determine the width of the cooker hood & the position in the frame

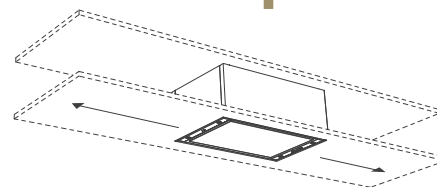

- 3 Determine the texture & design of your shelves (not included in kit)

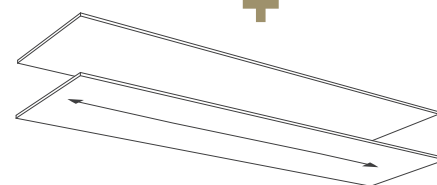

- 4 Determine the position & the ambient light kit

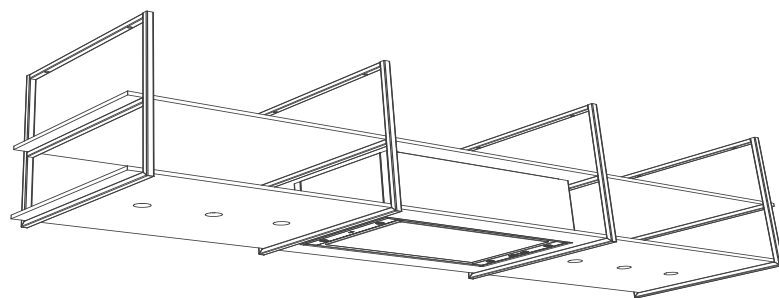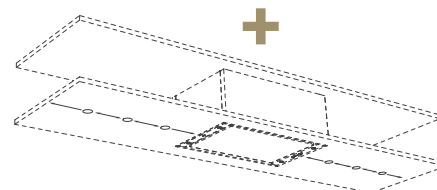

**Video**  
Customise your  
Novy Pureline Frame







NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Mood

- Efficient cooker hood and lighting in one
- Adjustable light intensity and colour temperature from 2,700 K to 5,000 K
- Recirculation as standard for additional planning options (carbon filter with a life span of up to 900 cooking hours)
- Extended lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and mood mode)
- Operation and settings possible via smartphone or tablet (Novy Connect), as well as via remote control

Novy Mood / Island cooker hoods 204 – 205



**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Standard with recirculation.



**Novy Connect**  
Operation and settings possible via smartphone or tablet.



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	maximum		
108	Integrated	White	661	53	69	7550	£3,014
	Integrated	Mineral Black	661	53	69	7552	£3,014

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video  
Novy Mood





### Technical specifications



Functions	
Controls	Remote control (black) / Novy Connect
Number of speed settings	4
With noise reduction	•
Recirculation	• (monoblock)
InTouch function for hobs	•
Auto-Stop, automatic switch-off after 3 hours	•
Run-on timer (min.)	30
Cleaning indicator for grease filter	•
Replacement indicator for recirculation filter	•

Lighting	
Type of lighting (W)	LED (32) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour mode mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics	
Colour	7550 white (≈RAL 9003) / 7552 Mineral Black (≈RAL 9005)
Integrated motor	•
Weight cooker hood / motor casing (kg)	32
Mains voltage (V) / Electrical connection value (W)	230 / 196


Dimensions	
Dimensions (B×D) (mm)	1080×246
Height of the Cooker hood (mm)	370
Minimum total height of the cooker hood (mm)	620
Maximum total height of the cooker hood (mm)	1,870
Exhaust position	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850

### Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7550, 7552	Integrated motor	1010	324	432	534	661	41 / 53	47 / 59	52 / 64	57 / 69

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

### Technical drawings

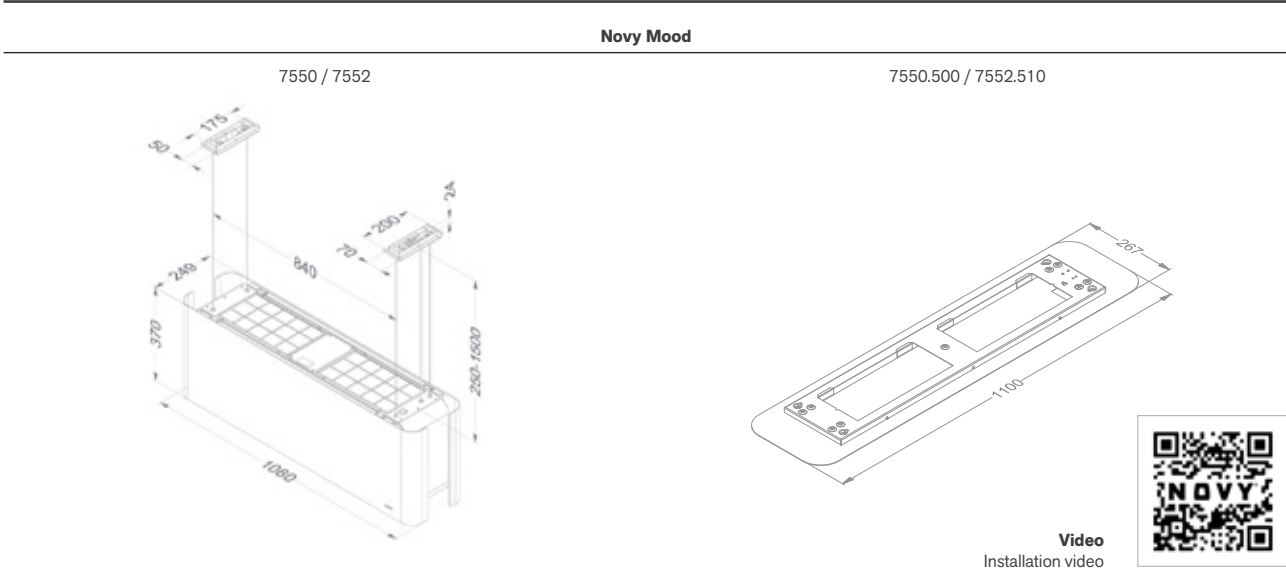

### Accessories

	Reference	Price/pc	7550	7552
<b>Miscellaneous</b>				
Grease filter (replacement) (4 pcs to order)	7550.030	£79	•	•
Kit with longer hanging cables (4×3,5 m)	7550.100	£124	•	•
Mounting set Mineral Black	7552.310	£124		•
Ceiling plate white	7550.500	£124	•	
Ceiling plate Mineral Black	7552.510	£124		•
Remote control (white)	840.029	£104	•	•
<b>Recirculation</b>				
Monoblock replacement filter (set contains 2 pcs)	7550.400	£339	•	•







# Novy Flatline

- Extra slim lines
- Seamless finish
- Subtle looking LED lighting (2,700 K)
- Reversible chimney for recirculation as standard
- Recirculation optional: carbon filter with a life span of up to 900 cooking hours






**Distance**  
Maximum distance between cooker hood and hob.



**InTouch**  
Standard with function for controlling the cooker hood from the hob.



**Recirculation**  
Recirculation is optional.



In option









Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	707	35	53	7640	£2,614
	Integrated	Mineral Black	A+	707	35	53	7642	£2,769
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7645	£2,334
100	Integrated	Stainless steel	A	743	47	57	7650	£2,724
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7655	£2,499
120	Integrated	Stainless steel	A	744	47	57	7660	£2,959
	Not included <sup>(1)</sup>	Stainless steel		<sup>(1)</sup>	<sup>(1)</sup>	<sup>(1)</sup>	7665	£2,739

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical specifications

		
	<b>Novy Flatline island 90 cm 7640 stainless steel / 7642 Mineral Black (≈RAL 9005)</b>	<b>Novy Flatline island 90 cm 7645 stainless steel motor not included</b>
<b>Functions</b>		
Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	
<b>Lighting</b>		
Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable Lighting	▪	▪
Lighting colour (K)	2,700	2,700
<b>Technical characteristics</b>		
Colour	7640 stainless steel 7642 Mineral Black (≈RAL 9005)	stainless steel
Integrated motor	▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪
Weight cooker hood / motor casing (kg)	36	33 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 13 + motor
<b>Dimensions (mm)</b>		
Dimensions (B×D)	900×600	900×600
Height of the cooker hood (Hmin–Hmax) (mm)	563–730	563–730
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	679–860	
Maximum height with chimney extension Optional A/B	1040 / 1350	1040 / 1350
Maximum height with chimney extension for recirculation Optional A/B	1170 / 1480	
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850

			
<b>Novy Flatline island 100 cm 7650 stainless steel</b>	<b>Novy Flatline island 100 cm 7655 stainless steel motor not included</b>	<b>Novy Flatline island 120 cm 7660 stainless steel</b>	<b>Novy Flatline island 120 cm 7665 stainless steel motor not included</b>
Buttons	Buttons	Buttons	Buttons
3 + power function	3 + power function	3 + power function	3 + power function
6	6	6	6
▪	▪	▪	▪
Optional (monoblock)		Optional (monoblock)	
▪	▪	▪	▪
▪	▪	▪	▪
10	10	10	10
▪	▪	▪	▪
▪		▪	
LED (4×2)	LED (4×2)	LED (4×2)	LED (4×2)
▪	▪	▪	▪
2,700	2,700	2,700	2,700
stainless steel	stainless steel	stainless steel	stainless steel
▪		▪	
	▪		▪
38	35 + motor	42	39 + motor
230 / 308	230 / 13 + motor	230 / 300	230 / 13 + motor
1000×700	1000×700	1200×700	1200×700
563–730	563–730	563–730	563–730
679–860		679–860	
1040 / 1350	1040 / 1350	1040 / 1350	1040 / 1350
1170 / 1480		1170 / 1480	
150	150	150	150
Top	Top	Top	Top
650–850	650–850	650–850	650–850
600–850	600–850	600–850	600–850
650–850	650–850	650–850	650–850



Air quantity and sound level


Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7640, 7642	Integrated	815	277 / 66	467 / 237	620 / 382	707 / 382	24 / 35	34 / 46	41 / 53	44 / 56
7645	Not included <sup>(1)</sup>		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7650	Integrated	1000	216 / 314	296 / 472	451 / 531	743 / 555	32 / 47	35 / 50	41 / 57	50 / 64
7655	Not included <sup>(1)</sup>		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7660	Integrated	1000	219 / 324	302 / 470	459 / 496	744 / 511	32 / 47	36 / 51	41 / 57	51 / 65
7665	Not included <sup>(1)</sup>		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical drawings

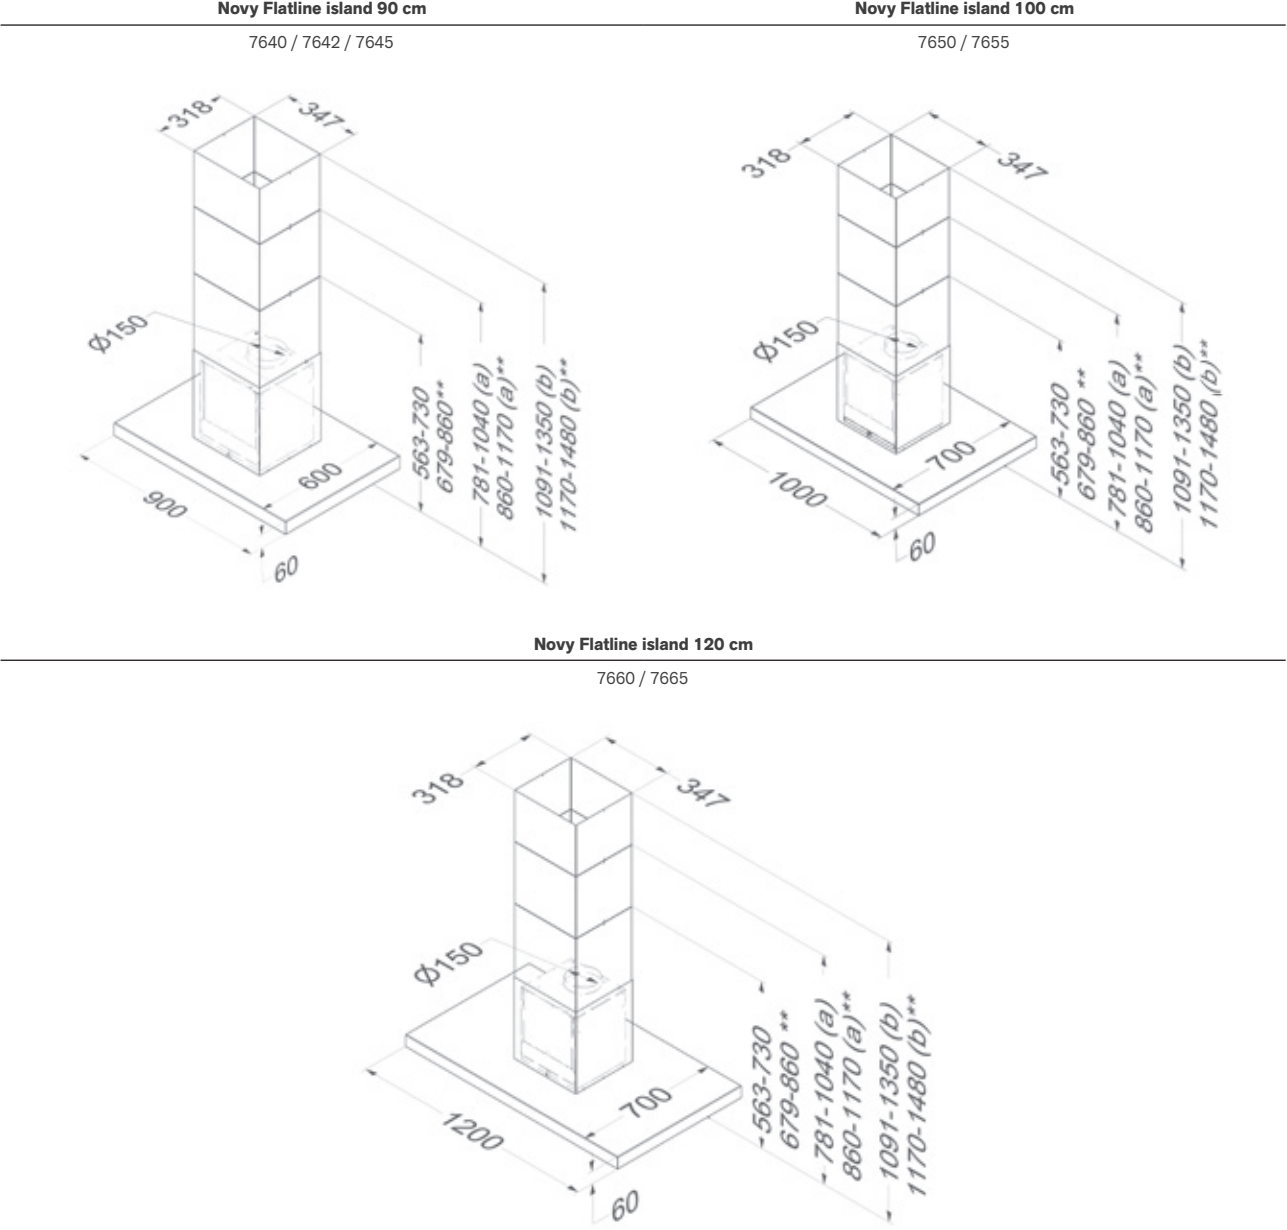

(a) With chimney extension - (b) With chimney extension (higher) - \*\*With recirculation

Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
<b>Motor at a distance</b>									
Remote motor for inside	245.999	£654			•		•		•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•		•		•
Roof motor 48.8 cm height	745.999	£1,784			•		•		•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•		•		•
<b>Miscellaneous</b>									
Chimney extension stainless steel option A	7640.120	£484	•		•	•	•	•	•
Chimney extension stainless steel option B	7640.130	£639	•		•	•	•	•	•
Chimney extension Mineral Black option A	7642.120	£484		•					
Chimney extension Mineral Black option B	7642.130	£639		•					
Grease filter (replacement)	7530.020	£74	•	•	•	•	•	•	•
Kit with LED lighting (4,000 K)	906.307	£159	•	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•		•		•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•

245.999



245.999



445.999



445.999



745.999



745.999



755.999



755.999



7530.020



840.029



990.030



990.030



Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
<b>Recirculation</b>									
Recirculation kit	7640.400	£309	•	•		•		•	
Monoblock replacement filter	7600.060	£159	•	•		•		•	

7640.400



7600.060



# Cooker hood accessories

Recirculation	p. 218
Motors	p. 222
Maintenance	p. 224
Installation accessories	p. 226

Accessories can be found per product on the relevant product page.



# Recirculation

By opting for recirculation you no longer need to vent warm air to the outside, which saves you energy. In addition, a cooker hood with recirculation offers more freedom with regard to its position in comparison to a cooker hood with an exhaust to the outside. This technology is based on an upgraded monoblock carbon filter that provides an extraordinary level of cooking odour absorption.

# Installation methods

## Novy built-in box with monoblock filter for ceiling units, downdrafts and canopy

The Novy built-in box with monoblock filter must be built into an existing structure, cabinet or plinth, and is connected to the cooker hood. The odours of the extracted cooking vapours are filtered out by the monoblock filter in the box. It also reduces the noise more. The air is then returned to the kitchen through the exhaust grill of the box. This excellent efficiency is due to the elegant design of the box, in which small hexagonal holes ensure a greater air flow. Visually, the smooth surface results in a subtle integration into the plinth.

## Basic kits to integrate in ceiling units and canopies

For ceiling units and canopies a kit can be ordered when opting for recirculation. The basic kit consists of a monoblock filter. This is placed directly behind the grease filter. For the Novy Fusion Pro, Fusion, Telescopic and Telescopic Essence a tailored design exhaust grill for upper cabinets (906.450) is available to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm  
For ceiling units and other canopies a exhaust grill to return the filtered air into the kitchen must be provided by you.

## Basic kits for wall and island cooker hoods

For wall and island cooker hoods you must order a basic kit when opting for recirculation. This basic kit with monoblock filter is integrated in the chimney of the cooker hood. It also reduces the noise more. The air is then returned to the kitchen through the outlets in the cooker hood chimney.

## Cooker hoods with recirculation as standard

Some cooker hoods are equipped with recirculation and a monoblock filter as standard.

## Replaceable carbon filter cartridges


Salsa and Essence cooker hoods use replaceable carbon filter cartridges. In due course the cartridges must be replaced. The kit consists of a cartridge filled with active carbon granules. The exhaust grill must be provided by the customer in the canopy, decorative chimney or cabinet (except in the case of Salsa).

# Maintenance

## Replacement monoblock filter or active carbon filter cassettes


After 3 to 5 years (depending the models and on the intensity of cooking) the monoblock filter needs to be replaced. All cooker hoods have a cleaning indicator which, in the case of a monoblock filter, lights up after 900 hours of cooking (depending on the models). In the case of cooker hoods with active carbon filter cartridges, the indicator lights up after 120 hours and the cassette must be replaced.

Novy offers a wide range of accessories that make it possible to adapt a cooker hood to your specific situation. In this way it will be a great pleasure to use your cooker hood.



# Recirculationboxes

## Technical specifications



841.400 white  
842.400 Mineral Black  
843.400 grey  
£484




7931.400 white  
7932.400 Mineral Black  
7933.400 grey  
£484



7921.400 white  
7922.400 Mineral Black  
7923.400 grey  
£459



1811.821 white  
1811.822 Mineral Black  
1811.823 grey  
£549



7941.400 white  
7942.400 Mineral Black  
7943.400 grey  
£699



Technical characteristics		
Combine with	Ceiling units and canopy	Ceiling units and canopy
To be mounted in	Wall / ceiling / cabinet	Wall / ceiling / cabinet
Type	Recirculationbox	Recirculationbox
Grid colour	841.400 white (≈RAL 9003) 842.400 Mineral Black (≈RAL 9005) 843.400 grey (≈RAL 7030)	7931.400 white (≈RAL 9003) 7932.400 Mineral Black (≈RAL 9005) 7933.400 grey (≈RAL 7030)
Including monoblock filter(s)	•	•
Number of monoblock filters	1	2

Accessories included



Dimensions (mm)		
Dimensions (W×D×H) (mm)	500 × 295 × 270	820 × 292 × 140
Opening (W×H) (mm)	487 × 255	805 × 123
Maximum plinth height		
Dimensions inlet (mm)	Ø150	89 x 222 / Ø150
Position inlet	Rear corner / top corner / side corner Recirculationbox 180° rotatable	Rear corner / side (89 x 222) / top (Ø150) Recirculationbox 180° rotatable

### Accessories

Monoblock replacement filter for recirculationbox	830.055 £169	7900.055 (2 pcs to order) £159
---	-----------------	-----------------------------------

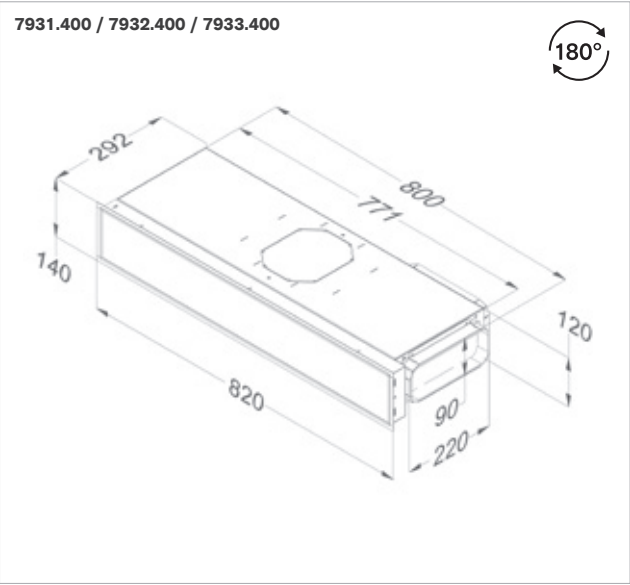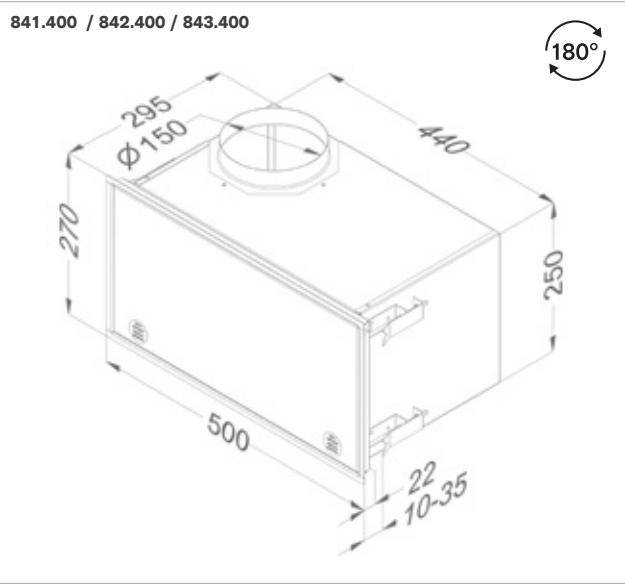

Downdraft	Downdraft	Downdraft (Novy Panorama 120)
Plinth	Plinth	Plinth
Recirculationbox	Recirculation kit + accessories	Recirculationbox
7921.400 white (≈RAL 9003) 7922.400 Mineral Black (≈RAL 9005) 7923.400 grey (≈RAL 7030)	1811.821 white (≈RAL 9003) 1811.822 Mineral Black (≈RAL 9005) 1811.823 grey (≈RAL 7030)	7941.400 white (≈RAL 9003) 7942.400 Mineral Black (≈RAL 9005) 7943.400 grey (≈RAL 7030)
•	•	•
2	2	3
	1x 906.401 Flat duct 1000 mm 2× 906.402 Connector 1x 906.404 Vertical bend 90° with air deflectors	
818 × 289 × 98	818 × 289 × 98	1118 × 289 × 98
805 × 100	805 × 100	1105 × 100
100	100	100
89 x 222	89 x 222	89 x 222 (2×)
Rear centre / rear corner / side Recirculationbox 180° rotatable	Rear centre / rear corner / side Recirculationbox 180° rotatable	Behind (2×)
7910.055 (2 pcs to order) £159	7910.055 (2 pcs to order) £159	98.001 (set) £469

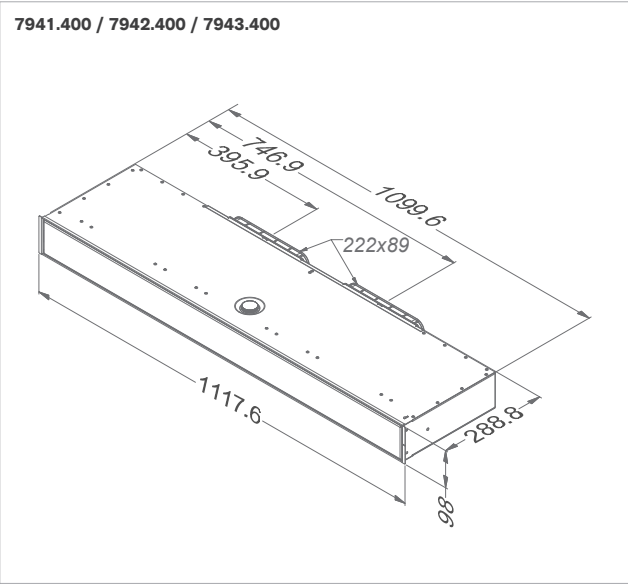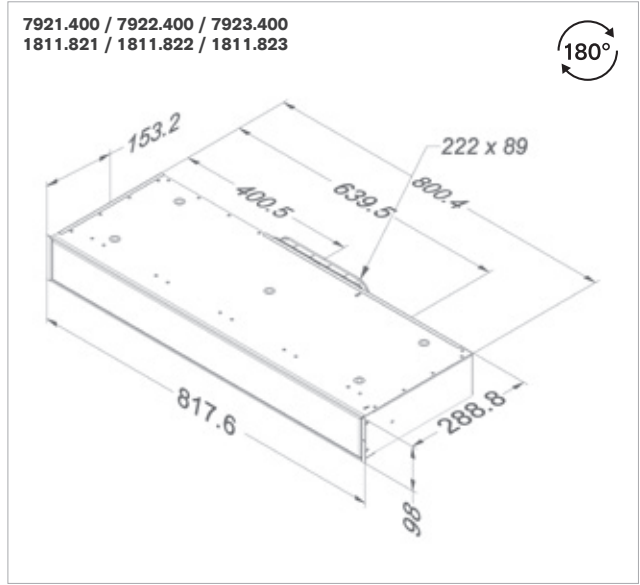

# Motors

## Remote motors

For models without an integrated motor, you have the option of a remote motor. The choice is between installation indoors and various motors for outside installation. This enables you to install a cooker hood in a suspended ceiling with limited height and create absolute silence in the kitchen. When installing a remote motor the sound level depends on the type of motor and installation. If the Novy cooker hood is installed without a Novy motor (or the motor without a Novy cooker hood) the warranty becomes void.

The cooker hood contains as standard a connection cable of approx. 4 m (depending on the model). A 5 m extension cable is optionally available if the distance between the cooker hood and the motor is greater.

## Kit to install remote motors inside

For the models Novy Pureline Pro, Pureline and Mini Pureline the motor can be easily installed remotely inside with an additional installation kit.

This installation kit contains a 5 m connecting cable as standard.

An optional 5 m extension cable is available if the distance between the cooker hood and the motor is greater.

## Technical specifications

Functions
Controls
Number of speed settings
With noise reduction (integrated)
With insulated flat roof uprising
With insulated flat roof uprising and silencer
With automatic return cover
With silencer, connecting piece, wall conduct and aluminium tape
With insulated switch
Minimum/ maximum operating temperature (°C)
Material
Material flat roof motor : aluminium (ALMG3)
Material flat roof motor : aluminium (ALMG3)
Material non-return valve : galvanised
Technical characteristics
Weight cooker hood / motor casing (kg)
Mains voltage (V) / Electrical connection value (W)
Dimensions
Dimensions motorunit (B×D×H) (mm)
Exhaust opening diameter (mm)
Exhaust position
Diameter inlet (tube) (mm)
Diameter inlet (opening roof) (mm)



Remote motor for installation inside  
245.999 Black  
£654



Wall mmotor  
445.999 Stainless steel  
£1,064



Flat roof motor 48,8 cm  
745.999  
£1,784







Flat roof motor 78,4 cm  
755.999  
With noise reduction  
£2,049

In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood
3 + power function	3 + power function	3 + power function	3 + power function
•			•
		•	
	•	•	•
	•		
		•	•
		-25 / 65	-25 / 65

		•	•
		•	•
		•	•

6	11	10,7	13,9
230 / 250	230 / 184	230 / 191	230 / 191

309×280×244	400×130×500	388×388×488	388×388×784
150	150		
Top / right / left / front / rear	Below	Vertical	Vertical
150		150	150
	180	180	180



## Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
245.999	1000	401 / 350	503 / 410	634 / 370	760 / 450	30 / 42	35 / 47	40 / 53	43 / 57
445.999	1400	330 / 380	520 / 450	660 / 520	940 / 660	31 / 43	37 / 49	40 / 52	43 / 56
745.999	1180	855 / 590	975 / 625	1080 / 650	1150 / 670	61	62	63	64
755.999	1180	850 / 590	970 / 625	1075 / 650	1145 / 670	55	56	57	58

Sound level of roof motors measured on the suction side Lwa5 (dB(A)) (DIN 45635-2).





# Installation accessories

The proper functioning of a cooker hood is partly determined by the correct installation of the device and it is important that you take this into consideration at an early stage of the construction process. Novy offers a wide range of installation accessories for your specific situation.

## Flat exhaust ducts

These ducts are very suitable for ceilings with a small overall height.

**906.401**  
Flat duct 1000 mm  
89×222×1000 mm  
(male)  
£49



**906.402**  
Connector  
94×227×80 mm  
(female)  
£24



**906.403**  
Horizontal bend 90°  
with air deflectors  
94×227×290 mm  
(female)  
£59



**906.408**  
Flat flexible tube  
89×222×750 mm  
(male)  
£94



**906.404**  
Vertical bend 90° with  
air deflectors  
94×175×227 mm  
(female)  
£49



**906.405**  
Angle adaptor  
Ø 150 mm with  
air deflectors (male)  
94×227×205 mm (female)  
Heigh 140 mm  
£59



**906.406**  
Transfer  
Ø 150 mm  
94×227×150 mm  
(female)  
£49



**906.407**  
Wall duct stainless steel  
with non-return valve  
222×89 mm  
depth connector  
120 mm  
£264



**906.418**  
Bend 15° for flat duct  
94×227×138 mm  
(male/female)  
£19



## Non-return valves

The use of a non-return valve is advised to prevent cold air flows coming in from outside.

Non-return valve  
**906.431**  
mechanical non-return valve,  
Ø 125 mm (male)  
£49  
**906.432**  
mechanical non-return valve,  
Ø 150 mm (male)  
£59



Electric valve  
**906.270**  
electric valve Ø125 mm, 230 V (male)  
N/C with spring return, to combine  
with kit 990.030 - £294  
**906.271**  
electric valve Ø150 mm, 230 V (male)  
N/C with spring return, to combine  
with kit 990.030 - £309



## Round ducting & accessories


Round tube 1 m (male)  
**906.410**  
Ø 125 mm  
£49  
**906.415**  
Ø 150 mm  
£49




Connector (female)  
**906.412**  
Ø 125 mm  
£14  
**906.417**  
Ø 150 mm  
£14




Bend 90° (with air deflectors  
for a better result) (female)  
**906.411**  
Heigh 187 mm - Ø 125 mm - £34  
**906.416**  
Heigh 212 mm - Ø 150 mm - £49




Aluminium tube  
**906.216**  
Ø 127 mm, lenght 10 m - £94  
**906.218**  
Ø 152 mm, lenght 10 m - £94




Aluminium tube  
**906.219**  
Ø 127 mm, lenght 3 m - £49  
**906.217**  
Ø 152 mm, lenght 3 m - £49  
**906.430**  
Ø 202 mm, lenght 3 m - £59




Flexible silencer, lenght 1 m  
**906.288**  
Ø 127 mm - outer Ø 180 mm - £59  
**906.287**  
Ø 152 mm - outer Ø 210 mm - £59




Y-piece (male)  
**906.299**  
2×Ø 125 mm – Ø 150 mm - £79  
**906.298**  
2×Ø 150 mm – Ø 200 mm - £194  
**906.297**  
elbow 45° Ø 125 mm / stuk - £59



Clamp  
**906.290**  
range Ø 60 – 135 mm - £14  
**906.291**  
range Ø 60 – 215 mm - £14  
**906.292**  
aluminium tape width 50 mm  
(per 50 m) - £34



Installation kit (non-return valve,  
3 m aluminium tape, 3 m aluminium  
tube 906.217 or 906.219)  
**906.300**  
Ø 125 mm - £104  
**906.301**  
Ø 150 mm - £124




## Wall exhaust valve

This valve covers the exhaust duct. It keeps cold air out, but also other weather and natural influences, so that the exhaust does not get blocked.


Wall exhaust valve  
**906.078**  
173×173 mm, aluminium  
for exhaust Ø 125 mm - £79  
**906.178**  
210×210 mm, aluminium  
for exhaust Ø 150 mm - £94  
**906.400**  
210×210 mm, black (RAL9005)  
for exhaust Ø 150 mm - £159  
**906.079**  
246×246 mm, aluminium  
for exhaust Ø 200 mm - £104



Wall conduct kit for  
ducting  
**906.420**  
Ø 150 mm - £494



Wall conduct kit for flat exhaust duct  
**906.425**  
89×222 mm - £494




## Exhaust grill for upper cabinet

Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen.



**906.450**  
Connection diameter Ø 150 mm,  
Cut-out in housing Ø 170 mm  
£159





# Hobs

Induction  
Pro



Induction  
Power



Induction  
Comfort



Induction  
Domino's



Induction  
Multizone



Gas  
Pro



Cooking profile

Intensity	<div><div></div><div></div><div></div></div>	<div><div></div><div></div></div>	<div><div></div></div>	<div><div></div> / <div></div><div></div></div>	<div><div></div></div>	<div><div></div> / <div></div><div></div></div>
-----------	--	-----------------------------------	------------------------	---	------------------------	---

Number of cooking zones

1				<div><div></div></div>		<div><div></div></div>
2				<div><div></div></div>		<div><div></div></div>
3			<div><div></div></div>		<div><div></div></div>	<div><div></div></div>
4	<div><div></div></div>	<div><div></div></div>	<div><div></div></div>		<div><div></div></div>	<div><div></div></div>
5	<div><div></div></div>	<div><div></div></div>	<div><div></div></div>			<div><div></div></div>

Flexzone / Expandable zone

1		<div><div></div></div>		<div><div></div></div>		
2	<div><div></div></div>					

Dimensions cooking zones (mm)

Dimensions	200×240 / Ø280	200×240 / Ø230 / Ø280	Ø175 / Ø210 / Ø260	200×240 / Ø175 / Ø210	Ø175 / Ø210	Ø230 / Ø270
------------	----------------	-----------------------	--------------------	-----------------------	-------------	-------------

p. 232

p. 236

p. 240

p. 244

p. 248

p. 252

Normal use, basic cooking function, different zones with different power

Normal use, extensive cooking functions, different zones with high power

Intensive use, extensive cooking function, equal zones with high power



## NOVY HOBS

# Control at your fingertips

You can cook intuitively. The cooker hood can also be controlled from the hob. InTouch technology combines cooker hood and induction hob into one, without the need for remote control. Wireless, and seamless.

- InTouch connection with cooker hood
- Flexible cooking zones
- Automatic pot detection

## Installation method

Have your induction hob placed on top of the worktop (surface-mounted) or opt for recessed integration (flush-mounted) and go completely seamless.

## Intuitive operation

All our hobs can be operated intuitively. Thanks to the slider and touch control function every temperature change is at your fingertips.

## Minimalist design

A sleek design stripped of all frills - you'll recognise this in every Novy hob. Even the controls remain in the background and only light up when you start cooking.



## Convenient flex zones

Connect two cooking zones into one large cooking zone. Convenient if you have large pots and pans on the hob, or if you want to grill like on the barbecue.



## Pot move function

Move your pot or pan to a new zone without losing the programming of the current zone.



## Pro with the Chef

The Chef function automatically links flex zones into 2 or 3 cooking zones (depending on the type of hob) and divides them into different programmes. Choose between quick power cooking, simmering or keep warm.



## InTouch technology

Operate your cooker hood from your hob with wireless RF communication.





# Induction Pro

- Even more flexibility and cooking surface through the use of octagonal zones
- Professional cooking programs, such as Chef function, Pot Move and Grill function for even more functionality
- White slider touch control operation
- Maximum power of 3,700 W for the octagonal zones and 5,000 W for the round zone
- Surface and flush installation possible



**InTouch**  
Function for controlling the cooker hood from the hob.

**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.

**Keep-warm function**  
Keep-warm function to keep food at a constant temperature.

**Chef function**  
Chef function for activation of programmed zones.



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	4 <div><div><div></div><div></div></div><div><div></div><div></div></div></div>	4 × 240×200	▪	7400	1773	£2,209
80×52	75×49	4 <div><div><div></div><div></div></div><div><div></div><div></div></div></div>	4 × 240×200	▪	7400	<div><div>NOVY</div><div>PREMIUM INNOVATION PRODUCT</div></div> 1775	£1,924
80×52	75×49	5 <div><div><div></div><div></div></div><div><div></div></div><div><div></div><div></div></div></div>	4 × 240×200, 200×300	▪	11100	1776	£3,129
91×41	89×39	4 <div><div><div></div><div></div><div></div><div></div></div></div>	4 × 200×240	▪	7400	1777	£2,839
90×52	85×49	5 <div><div><div></div><div></div></div><div><div></div></div><div><div></div><div></div></div></div>	4 × 240×200, Ø280	▪	11100	1778	£3,254

Video  
Five reasons for choosing a Novy induction hob











# Induction Power

- Great flexibility due to the combination of octagonal and round zones
- Extensive cooking programs for refined cooking
- Red slider touch control operation
- Maximum power of 3,000 W per zone
- Surface and flush installation possible



**InTouch**  
Function for controlling the cooker hood from the hob.



**Flexzone**  
Automatic or manual bridge function of 2 cooking zones.













**Keep-warm function**  
Keep-warm function to keep food at a constant temperature.



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	4	2× 240×200, 2× Ø210	▪	7400	1763	£1,739
80×52	75×49	4	2× 240×200, Ø230, Ø280		7400	1724	£2,049
80×52	75×49	4	2× 240×200, Ø230, Ø280	▪	7400	1726	£2,209
90×52	85×49	5	2× 240×200, Ø280, 2× Ø200	▪	11100	1768	£2,049
100×40	98×38	4	2× 200×240, 2× Ø230	▪	7400	1767	£2,289

Technical specifications

		
	Induction Power 1724	Induction Power 1726
Controls		
Type of controls	Slider touch control	Slider touch control
Colour of controls	Red	Red
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
Functions		
InTouch function		•
Number of power levels	9 + Power + SuperPower	9 + Power + SuperPower
Count-up timer	•	•
Automatic pot detection	•	•
Flexzone	• (×1)	• (×1)
Automatic bridge function Flexzone	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)	70°	70°
Safety lock hob	•	•
Stop & Go	•	•
Automatic cooking	•	•
Cooking zones		
Number of cooking zones	4	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) (W)	230 / 2300 (3000)	230 / 2300 (3000)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) (W)	280 / 2300 (3000))	280 / 2300 (3000)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		
		
Dimensions (Installation details see p. 256-257)		
Dimensions (W×D×H) (mm)	800×520×47	800×520×47
Opening (B×D) (mm)	750×490	750×490
Weight (kg)	13.4	13.4
Technical details		
Total connected load (W)	7400	7400
Multiphase supply voltage	230 V / 400 V – 2N	230 V / 400 V – 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Accessories		
Side profiles <b>1700.092</b> - £69	•	•

		
Induction Power 1763	Induction Power 1767	Induction Power 1768
Slider touch control		
Red		
Round border		
• / •		
•		
•		
9 + Power + SuperPower		
•		
•		
• (×1)		
•		
•		
•		
•		
70°		
•		
•		
•		
4		
Front left		
240×200 / 2100 (3000)		
Rear left		
240×200 / 2100 (3000)		
Right front		
210 / 1400 (2100)		
Back right		
210 / 1400 (2100)		
		
4		
Front left		
200×240 / 2100 (3000)		
Left central		
200×240 / 2100 (3000)		
Right central		
230 / 2300 (3000)		
Back right		
230 / 2300 (3000)		
		
5		
Front left		
240×200 / 2100 (3000)		
Rear left		
240×200 / 2100 (3000)		
Central		
280 / 2300 (3000)		
Right front		
200/ 1400 (2100)		
Back right		
200/ 1400 (2100)		
		
650×520×47		
560×490		
11.1		
1000×400×47		
980×380		
14.8		
900×520×47		
850×490		
15.7		
7400		
230 V / 400 V – 2N		
230 V		
50 – 60		
7400		
230 V / 400 V – 2N		
230 V		
50 – 60		
11100		
230 V / 400 V – 2N / 3N		
230 V		
50 – 60		
•		
•		



# Induction Comfort

- Round zones with different capacities and various sizes
- Red slider touch control operation
- Default cooking programs for easy use
- Surface and flush installation possible



**InTouch**  
Function for controlling the cooker hood from the hob.







**Keep-warm function**  
Keep-warm function to keep food at a constant temperature.










Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	3	2× Ø200, Ø290	•	6400	1752	£1,089
65×52	56×49	4	2× Ø175, 2× Ø210		7400	1753	£1,179
80×52	75×49	4	2× Ø175, 2× Ø210		7400	1754	£1,424
80×52	75×49	4	2× Ø175, 2× Ø210	•	7400	1755	£1,579
80×37	76×34	3	Ø175, 2× Ø210	•	6700	1757	£1,324
90×52	85×49	5	3× Ø175, Ø210, Ø250	•	7400	1758	£1,924



Technical specifications

		
	Induction Comfort 1752	Induction Comfort 1753
Controls		
Type of controls	Touch control	Slider touch control
Colour or controls	Red	Red
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
Functions cooker hood		
InTouch function	•	
Number of power levels	9 + Power	9 + Power
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)		70°
Safety lock hob	•	•
Stop & Go		•
Automatic boiling function		•
Cooking zones		
Number of cooking zones	3	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	200 / 1400 (2000)	210 / 2300 (3000)
Cooking zone 2	Rear left	
Dimensions (mm) / Power (Boost) (W)	200 / 1100 (1400)	175 / 1100 (1400)
Cooking zone 3	Right	Right front
Dimensions (mm) / Power (Boost) (W)	290 / 2300 (3000)	175 / 1100 (1400)
Cooking zone 4		Back right
Dimensions (mm) / Power (Boost) (W)		210 / 2300 (3000)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		
		
Dimensions (Installation details see p. 256-257)		
Dimensions (W×D×H) (mm)	650×520×52	650×520×52
Opening (B×D) (mm)	560×490	560×490
Weight (kg)	10.1	11
Technical details		
Total connected load (W)	6400	7400
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Accessories		
Side profiles 1700.092 - £69	•	•

		
Induction Comfort 1754 / 1755	Induction Comfort 1757	Induction Comfort 1758
Slider touch control		
Red	Red	Slider touch control (round) Red
Round border		
• / •	• / •	• / •
•	•	•
• (only for 1755)	•	•
9 + Power	9 + Power	9 + Power
•	•	•
•	•	•
•	•	•
70°	70°	70°
•	•	•
•	•	•
•	•	•
4		
3	5	
Front left	Left	Front left
210 / 2300 (3000)	210 / 2300 (3000)	175 / 1400 (2000)
Rear left	Central	Rear left
175 / 1100 (1400)	175 / 1100 (1400)	175 / 1100 (1400)
Right front	Right	Central
175 / 1100 (1400)	210 / 2300 (3000)	250 / 2300 (3000)
Back right		Right front
210 / 2300 ( 3000)		175 / 1100 (1400)
		Back right
		210 / 2300 (3000)
		
800×520×52		
800×370×52		
900×520×52		
750×490		
760×340		
850×490		
12.6		
10.9		
16.8		
7400		
6700		
7400		
230 V / 400 V - 2N		
230 V / 400 V - 2N		
230 V		
230 V		
50 – 60		
50 – 60		
50 – 60		
•		
•		

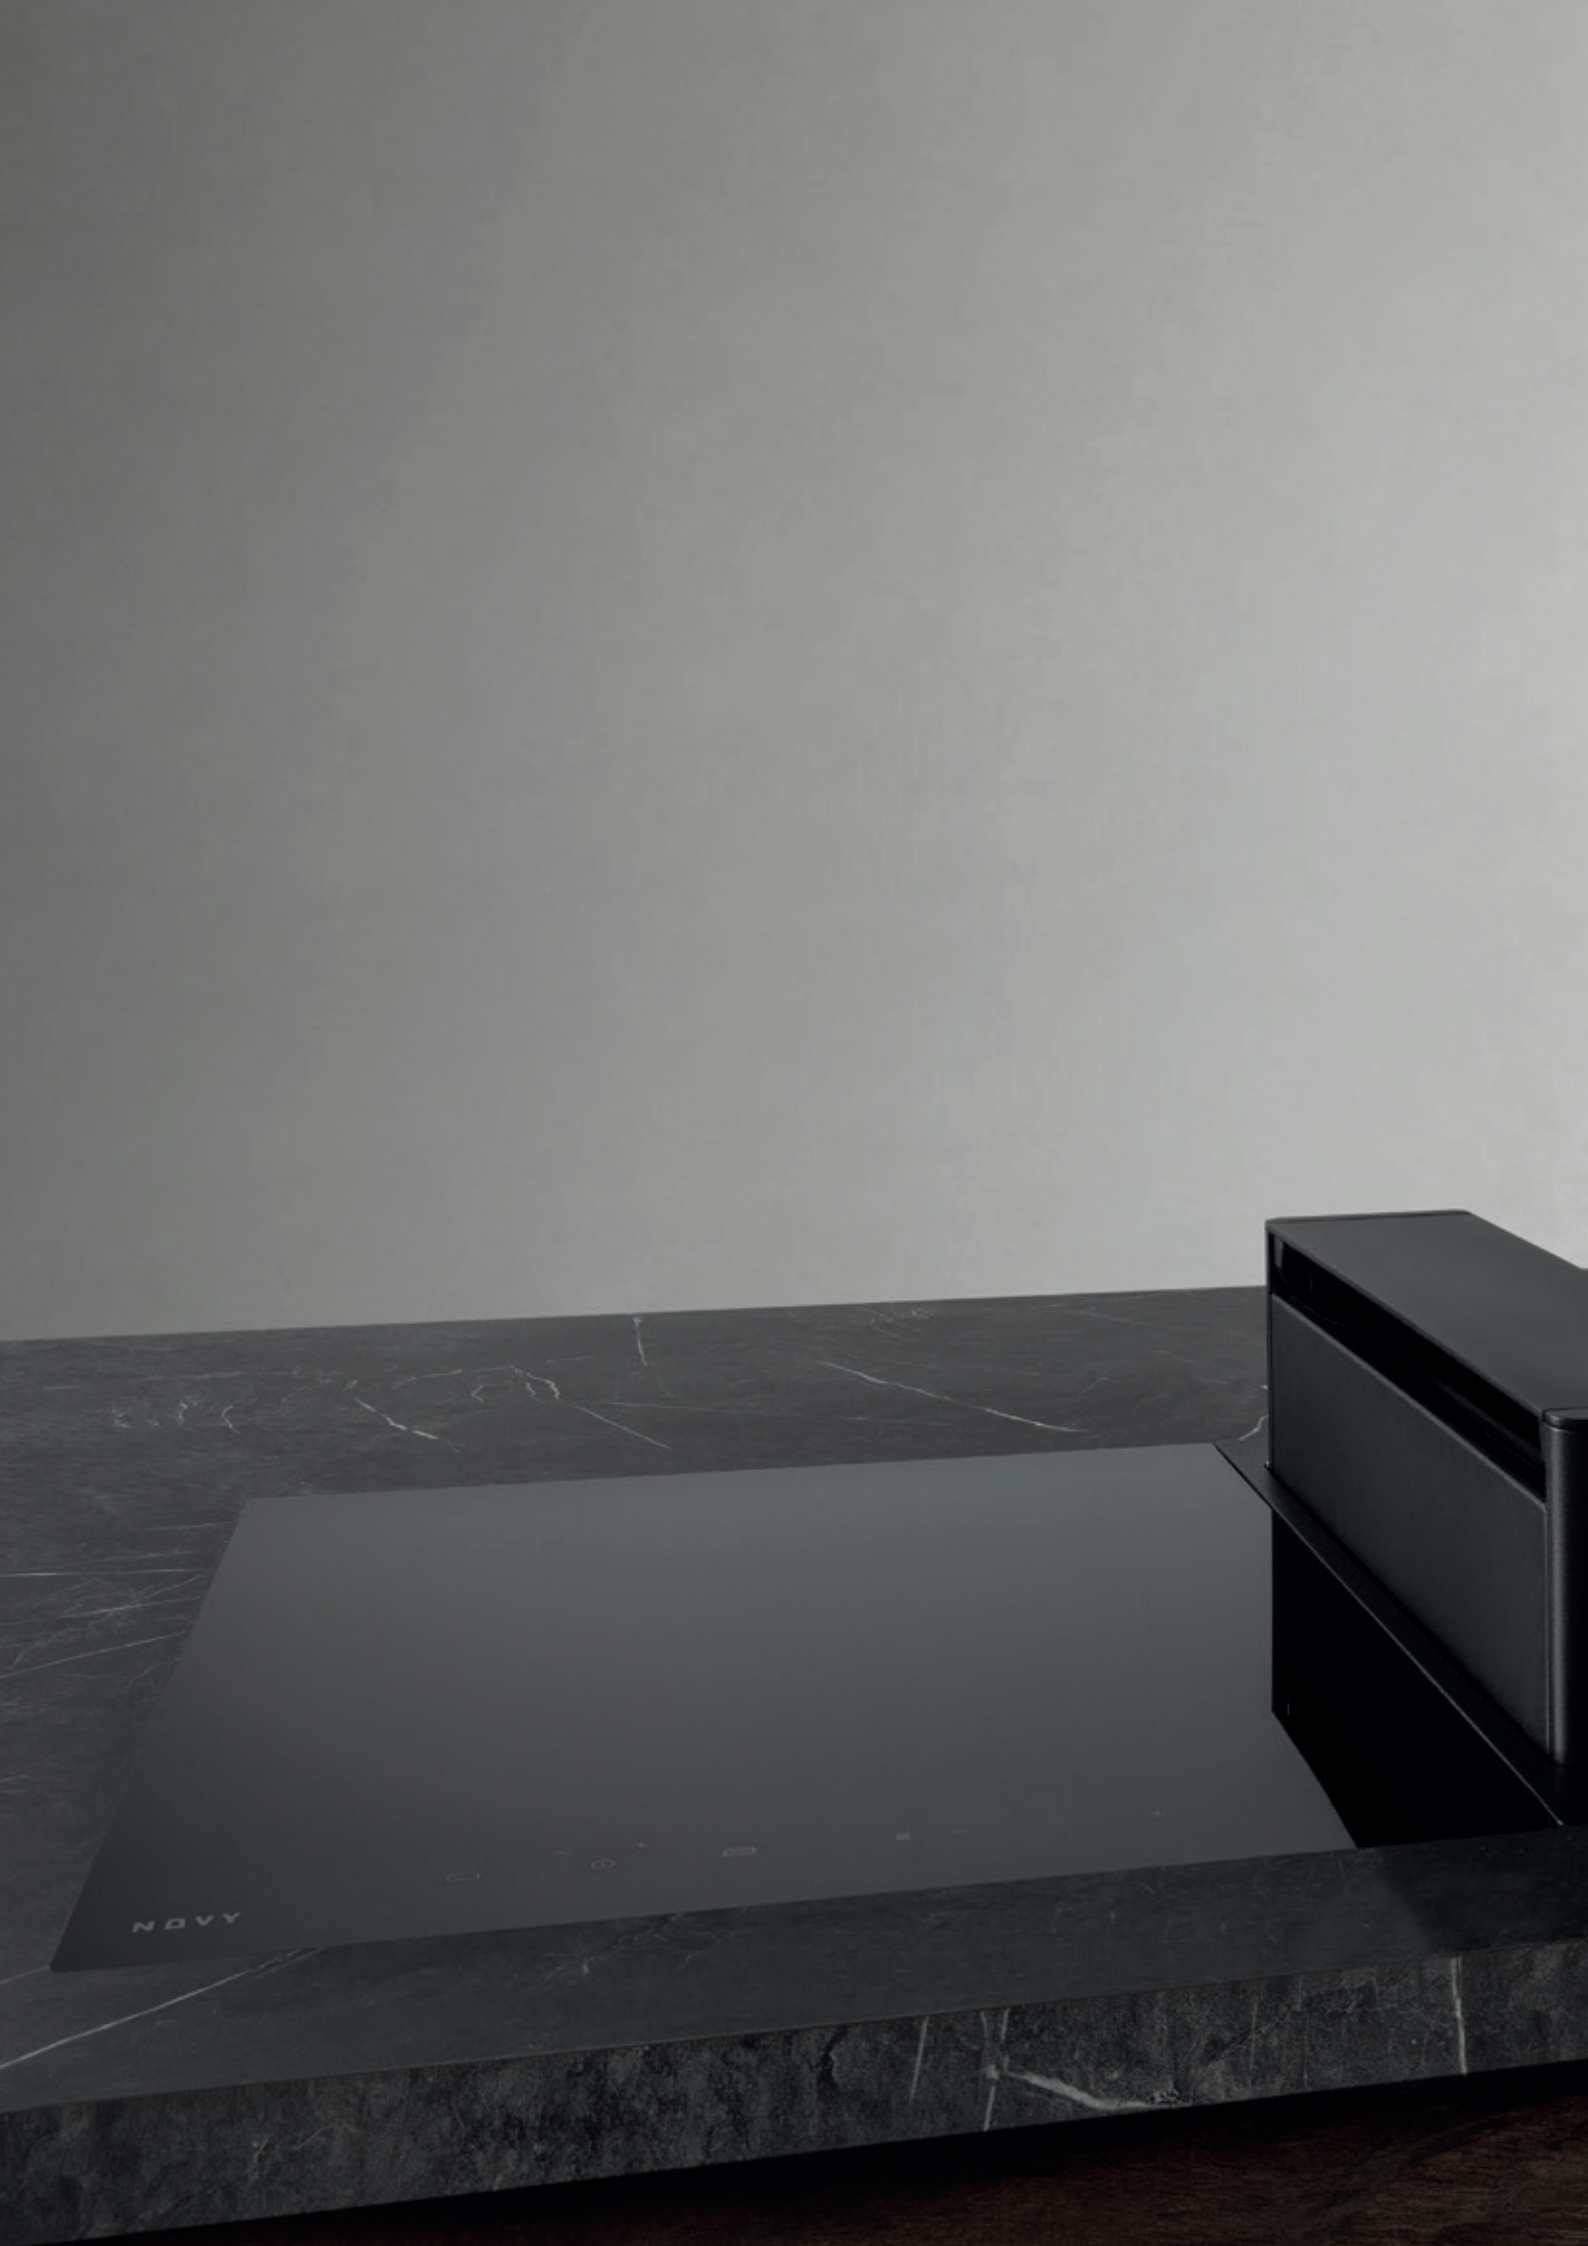

# Induction Domino's


- Create your own ideal setting
- Red slider or touch operation depending on the type of domino
- Rounded edge
- Surface and flush installation possible
- Optimal in combination with the venting hob Novy Up (see p. 72)



Type	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Max. output (W)	Ref.	Price/pc
<b>Induction 38 cm</b>						
Induction Comfort	38×52	2	Ø175, Ø210	3700	3784	£844
Induction Power	38×52	2	2× 240×200	3700	3774	£964
Induction Pro	38×52	2	2× 240×200	3700	3762	£1,569
Teppan yaki	38×52	2		2800	3753	£2,599
Wok <sup>(1)</sup>	38×52	1		3200	3773	£2,289
<b>Induction 58 cm</b>						
Teppan yaki	58×52	4		5600	3754	£3,734
<b>Fryer</b>						
Fryer	29×52			2000	3711	£719

(1) Demeyere wok Ø36 cm included as standard..

Technical specifications

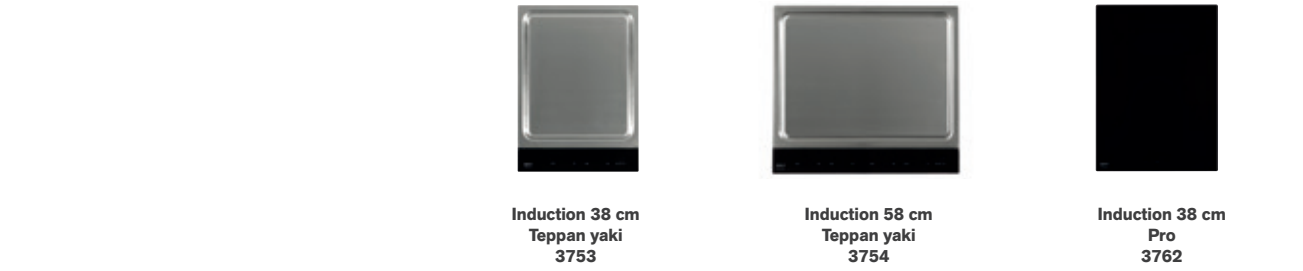

Controls			
Type of controls	Slider touch control	Slider touch control	Slider touch control
Colour or controls	Red	Red	Red

Glass built-in / Finish			
Finish	Round border	Round border	Round border
Surface / Flush	• / •	• / •	• / •
Black opaque glass			•

Functions			
Residual heat indication	•	•	•
Automatic pot detection			•
Flexzone	• (× 1)	• (× 2)	• (× 1)
Manual bridge function Flexzone	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Keep-warm function (°C)	120°, 150° and 180°	120°, 150° and 180°	42°, 70° and 94°
Safety lock hob	•	•	•
Stop & Go	•	•	•
Automatic boiling function			•


Cooking zones			
Number of cooking zones	2	4	2
Cooking zone 1	Front	Front left	Front
Dimensions (mm) / Power (Boost) (W)	1400	1400	240×200 / 2100 (3700)
Cooking zone 2	Back	Rear left	Back
Dimensions (mm) / Power (Boost) (W)	1400	1400	240×200 / 2100 (3700)
Cooking zone 3		Front right	
Dimensions (mm) / Power (Boost) (W)		1400	
Cooking zone 4		Back right	
Dimensions (mm) / Power (Boost) (W)		1400	



Dimensions (Installation details see p. 256-257)			
Dimensions (W×D×H) (mm)	380×520×54	580×520×54	380×520×47
Opening (B×D) (mm)	370×490	560×490	350×490
Weight (kg)	10,4	12,6	7
Content (l)			

Technical details			
Total connected load (W)	2800	5600	3700
Multiphase supply voltage		230 V / 400 V - 2N	
Single-phase supply voltage	230 V	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60	50 – 60
Connection cable	•	•	•

Accessories			
Demeyere Wok (included)			
Profile Domino's <b>3730.020</b> - £34	Optional	Optional	Optional

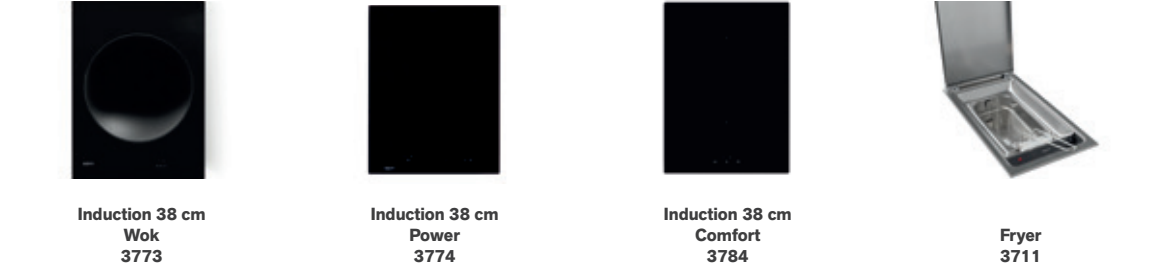

Slider touch control	Touch control	Touch control	Rotating button
Red	Red	Red	

Round border	Round border	Round border	Round border
• / •	• / •	• / •	• / -
•	•	•	

•	•	•	
	• (× 1)		
	•		
•	•	•	
•	•	•	
42°, 70° and 94°			
•	•	•	
•			

1	2	2	
Front	Front	Front	
360 (wok) / 2000 (3200)	240×200 / 1600 (1850)	175 / 1100 (1400)	
	Back	Back	
	240×200 / 2100 (3000)	210 / 2300 (3000)	



380×520×121	380×520×52	380×520×52	290×520×235
370×490	350×490	350×490	270×475
11,6	11,6	7	6,1
			4

3200	3700	3700	2000
230 V	230 V	230 V	230 V
50 – 60	50 – 60	50 – 60	50 – 60
•	•	•	•


•			
Optional	Optional	Optional	





# Induction Multizone



- 3 or 4 loose cooking zones with a seperate control zone to freely design into the worktop
- Extensive cooking functions
- Rounded borders
- Surface or flush mounting is possible
- Maximum power of 1,770 W for zones of 175 mm
- Maximum power of 3,100 W for zones of 210 mm

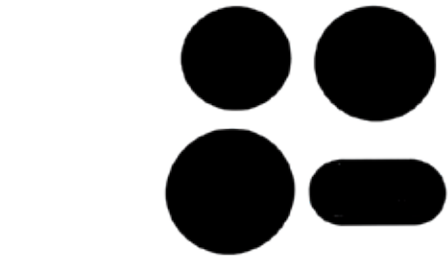


**InTouch**  
Function for controlling the cooker hood from the hob.

**Keep-warm function**  
Keep-warm function to keep food at a constant temperature.



Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
4	 2× Ø175, 2× Ø210	•	7400	1790	£2,049
3	 Ø175, 2× Ø210	•	6800	1791	£2,049

Technical specifications

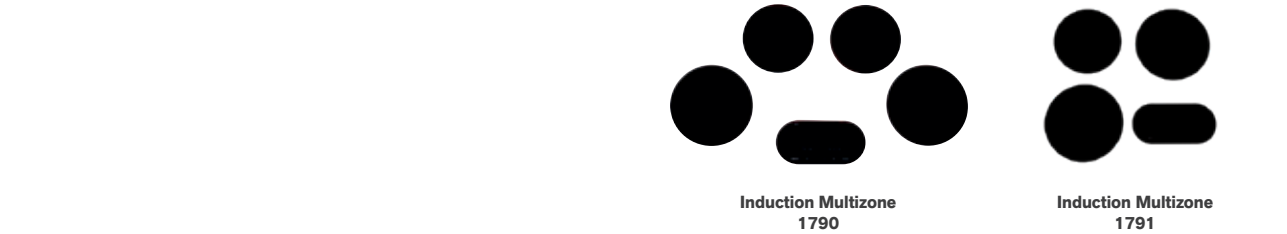

Controls		
Type of controls	Slider touch control	Slider touch control
Colour or controls	Red	Red
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
Functions cooker hood		
InTouch function	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)	70°	70°
Safety lock hob	•	•
Stop & Go	•	•
Cooking zones		
Number of cooking zones	4, zones to be positioned as required	3, zones to be positioned as required
Cooking zone 1	Left	Front left
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	210 / 2300 (3100)
Cooking zone 2	Left central	Rear left
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	175 / 1100 (1770)
Cooking zone 3	Right central	Back right
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	210 / 2300 (3100)
Cooking zone 4	Right	
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	
Dimensions		
Dimensions (W×D×H) (mm)	see p. 251	see p. 251
Opening (B×D) (mm)	see p. 251	see p. 251
Weight (kg)	14.5	12.4
Technical details		
Total connected load (W)	7400	6800
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60

Technical drawing

Dimensions

Diam A	300 mm	Cooking zone 210 mm
Diam A	270 mm	Cooking zone 175 mm

(mm)	A	E	H
Cooking zone 175	Ø 270	Ø 254	57
Cooking zone 210	Ø 300	Ø 284	57
Control panel	326×160– R80	314×150– R75	35

Built-in sketch

Surface

(mm)	E	F	G	K	P
Cooking zone 175	Ø 254	Ø 265	max 20	4	6
Cooking zone 210	Ø 284	Ø 295	max 20	4	6
Control panel	314×150– R75			4	6

Flush

(mm)	E	F	G	K	P	S
Cooking zone 175	Ø 254	Ø 265	max 20	4	6	Ø 274
Cooking zone 210	Ø 284	Ø 295	max 20	4	6	Ø 304
Control panel	314×150– R75			4	6	330×164– R82



NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Gas Pro

- Gas burners are directly integrated in your worktop (gas burners not compatible with wooden worktops)
- Robust, cast iron pot carriers in stylish and timeless look
- Visual control of the flame
- Sufficient space between the burners for large pots and pans
- Choice of various fixed cooking setups



Model	Width (cm)	Number of zones	Max output (W)	Ref.	Price/pc
Altar Top black	30	1	3.000	56002	£1,569
Azuma Top black	30	1	5.000	56004	£1,809
Capital Top black	60	3	2.000, 3.000, 5.000	56006	£3,974
Cusin Top black	90	3	3.000, 2× 5.000	56008	£3,974
Dempo Top black	90	4	2.000, 3.000, 2× 5.000	56010	£4,329
Danau Top black	120	4	2.000, 3.000, 2× 5.000	56012	£4,329
Drum Top black	120	4	2.000, 3.000, 2× 5.000	56014	£4,329
Elbrus Top black	90	5	2× 2.000, 2× 3.000, 5.000	56016	£4,939

Do not use pans with a larger base diameter than the pan support. We recommend for the 2 and 3KW burners a pan with a maximum base diameter of 230 mm and for the 5KW burner a maximum base of 270 mm.

Video  
Discover the stylish range  
of powerful gas burners



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOBS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOBS







DESIGNER  
LIGHTING



INFO







Technische specificaties

				
	Altar top 56002 / black	Azuma Top 56004 / black	Capital Top 56006 / black	Cusin Top 56008 / black
<b>Controls</b>				
Type of controls	Rotating button	Rotating button	Rotating button	Rotating button
<b>Glass built-in / Finish</b>				
Built-in	•	•	•	•
Cast iron pan support	•	•	•	•
Colour	Black	Black	Black	Black
<b>Functions</b>				
Automatic spark ignition	•	•	•	•
Flame protection	•	•	•	•
<b>Cooking zones</b>				
Number of cooking zones	1	1	3	3
Cooking zone 1	Central	Central	Front left	Left
Power (W)	3000	5000	3000	5000
Cooking zone 2			Back left	Central
Power (W)			2000	3000
Cooking zone 3			Right	Right
Power (W)			5000	5000
Cooking zone 4				
Power (W)				
Cooking zone 5				
Power (W)				
<b>Dimensions</b>				
Dimensions (W×D×H) (mm)	213×503×89	213×503×89	533×503×89	853×403×89
Opening (B×D) (mm)	Check technical file	Check technical file	Check technical file	Check technical file
Weight (kg)	5,5	7,5	18,5	20,5
<b>Technical details</b>				
Total connected load	3000	5000	9800	13000
Supply voltage	230 V	230 V	230 V	230 V
Frequency	50	50	50	50
Connection cable	•	•	•	•
<b>Accessories</b>				
Support bar / <b>56 199</b> - £124 (1 set included as standard)	•	•	•	•
Wok ring / <b>93 005</b> - £309 (1 included as standard)		•	•	•

Technical data worktop

	Min. thickness (mm)	Max. thickness (mm)
<b>Worktop material</b>		
Stainless steel, glass	4	35
Ceramic materials	10	35
Quartz composite (e.g. Caesarstone, Diresco, Unistone), Mineral Hybriq Surfaces (e.g. Silestone)	12	35
Ultracompact surface (e.g. Dekton)		
Natural stone (e.g. granite, marble)	30	35
Concrete, (massive) wood, laminate (HPL), solid surface	-	-


You will find detailed information on the installation and handling instructions on the Novy website. The worktop must be supported by all cabinet walls and rest fully on the cabinet structure. The guidelines of the kitchen manufacturer and/or the manufacturer of the kitchen worktop should always be strictly followed.

			
Dempo Top 56010 / black	Danau Top 56012 / black	Drum Top 56014 / black	Elbrus Top 56016 / black
Rotating button	Rotating button	Rotating button	Rotating button
•	•	•	•
Black	Black	Black	Black
•	•	•	•
•	•	•	•
4	4	4	5
Left	Left	Left	Front left
5000	5000	5000	3000
Central for	Center left	Center left	Back left
3000	3000	3000	2000
Center back	Center right	Center right	Central
2000	2000	2000	5000
Right	Right	Right	Front right
5000	5000	5000	3000
			Back right
			2000
853×503×89	1157×403×89	1157×503×89	853×503×89
Check technical file	Check technical file	Check technical file	Check technical file
25,5	25,5	25,5	29,5
14800	14800	14800	14600
230 V	230 V	230 V	230 V
50	50	50	50
•	•	•	•
•	•	•	•




# Installation of a Novy hob


## Dimensions

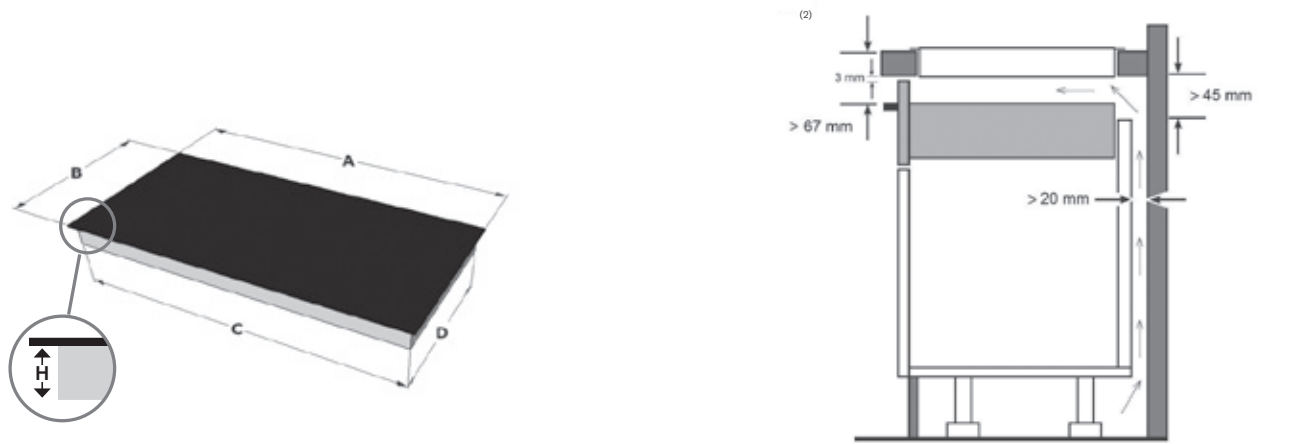

## Surface installation

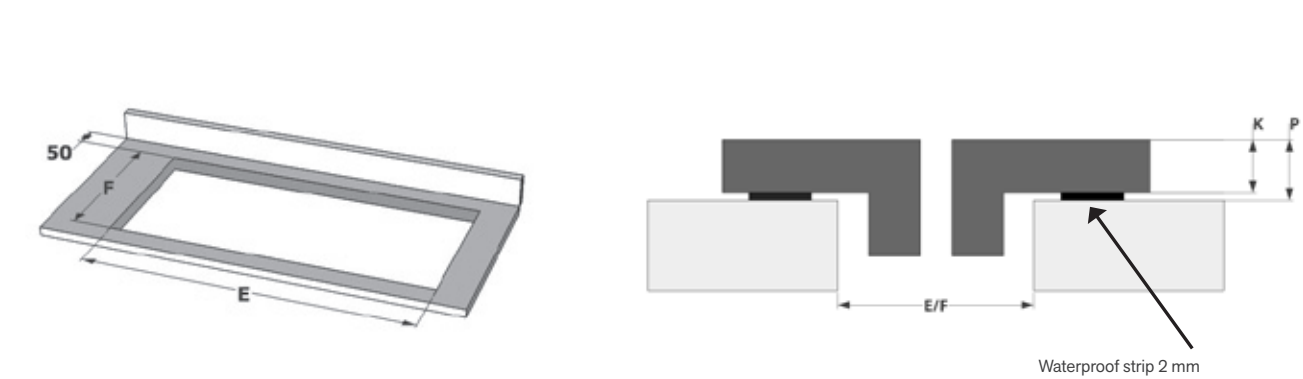

## Flush installation

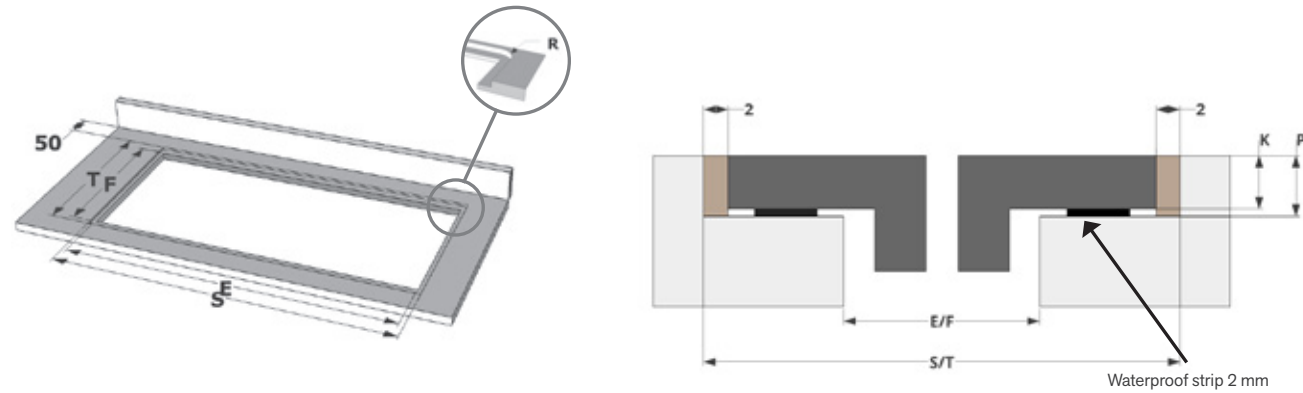

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
<b>Induction Pro</b>										
1773	650	520	560	490	47	7	654	524	4	6
1775	800	520	750	490	47	7	804	524	4	6
1776	800	520	750	490	47	7	804	524	4	6
1777	910	410	890	390	47	7	914	414	4	6
1778	900	520	850	490	47	7	904	524	4	6

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
<b>Induction Power</b>										
1724	800	520	750	490	47	7	804	524	4	6
1726	800	520	750	490	47	7	804	524	4	6
1763	650	520	560	490	47	7	654	524	4	6
1767	1000	400	980	380	47	7	1004	404	4	6
1768	900	520	850	490	47	7	904	524	4	6

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
<b>Induction Comfort</b>										
1752	650	520	560	490	52	7	654	524	4	6
1753	650	520	560	490	52	7	654	524	4	6
1754	800	520	750	490	52	7	804	524	4	6
1755	800	520	750	490	52	7	804	524	4	6
1757	800	370	760	340	52	7	804	374	4	6
1758	900	520	850	490	52	7	904	524	4	6

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
<b>Induction Domino's</b>										
3711	290	520	270	475	235	-	-	-	-	-
3753	380	520	370	490	54	7	384	524	6	8
3754	580	520	560	490	54	7	584	524	6	8
3762	380	520	350	490	47	7	384	524	4	6
3773	380	520	370	490	121	7	384	524	4	6
3774	380	520	350	490	52	7	384	524	4	6
3784	380	520	350	490	52	7	384	524	4	6

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
--	---	---	---	---	---	------------------	---	---	---	---

### Gas Pro

Check technical file

	A	B	E	F	H	R <sup>(1)</sup>	S	T	K	P
<b>Downdraft</b>										
1821, 1831, 1841	880	520	860	500	65	7	884	524	4	6
1871,1881	650	520	560	490	244	7	654	524	4	6
1851, 1861	800	520	750	490	225	7	804	524	4	6
1866	900	520	750	490	225	7	904	524	4	6
40000	491	520	486	500	224	7	495	524	5	7
40002	872	520	852	500	224	7	876	524	5	7
40004	872	520	852	500	224	7	876	524	5	7
40006	872	520	862	500	224	7	876	524	6	8
40008	872	520	862	500	224	7	876	524	5	7
40000 + 40002-8	1364	520	1354	500	224	7	1368	524	6	8
40002-8 + 40002-8	1745	520	1735	500	224	7	1749	524	6	8
42110, 42120	1180	520	1160	490	65	7	1184	524	4	6

(1) This is the standard radius finish. Contact your worktop supplier if you would prefer a smaller radius.

# Designer lighting

Novy Pendant



Novy Wall



Novy Shelf



Novy Shelf Pro



Length				
95 cm	▪	▪	▪	
125 cm	▪	▪	▪	▪
155 cm	▪	▪	▪	▪
185 cm	▪	▪	▪	▪
215 cm	▪	▪	▪	▪
245 cm	▪	▪	▪	▪
275 cm	▪	▪	▪	▪
305 cm	▪	▪	▪	▪

Colour				
Mineral White	▪	▪	▪	▪
Mineral Black	▪	▪	▪	▪

Operation				
Gesture Control	▪	▪	▪	
Gesture Control Pro				▪

Lighting				
Functional light	▪	▪	▪	▪
Ambient light	▪	▪	▪	▪





NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Pendant

- Next-generation hanging lamp with gesture-controlled lighting
- Top and bottom lighting
- Easy to swith between functional light and ambient light
- Adjustable light intensity and colour temperature from 2,700 K to 4,000 K
- Option to set the ambient colour (RGBW)
- Available in Mineral Black and Mineral White

Novy Pendant / Designer lighting



260 – 261



**Gesture Control**  
Lighting equipped with gesture control



**Ambient light**  
Next to functional light, ambient light is also provided



	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Pendant 95	937	Mineral White	36	710101-p3	£1,050
Novy Pendant 125	1237	Mineral White	48	710201-p3	£1,100
Novy Pendant 155	1537	Mineral White	60	710301-p3	£1,150
Novy Pendant 185	1837	Mineral White	72	710401-p3	£1,200
Novy Pendant 215	2137	Mineral White	84	710501-p3	£1,250
Novy Pendant 245	2437	Mineral White	96	710601-p3	£1,300
Novy Pendant 275	2737	Mineral White	108	710701-p3	£1,350
Novy Pendant 305	3037	Mineral White	120	710801-p3	£1,400
Novy Pendant 95	937	Mineral Black	36	710102-p3	£1,050
Novy Pendant 125	1237	Mineral Black	48	710202-p3	£1,100
Novy Pendant 155	1537	Mineral Black	60	710302-p3	£1,150
Novy Pendant 185	1837	Mineral Black	72	710402-p3	£1,200
Novy Pendant 215	2137	Mineral Black	84	710502-p3	£1,250
Novy Pendant 245	2437	Mineral Black	96	710602-p3	£1,300
Novy Pendant 275	2737	Mineral Black	108	710702-p3	£1,350
Novy Pendant 305	3037	Mineral Black	120	710802-p3	£1,400

Technical drawings, see p. 278

Video  
Gesture Control



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOODS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOODS











DESIGNER  
LIGHTING



INFO

Technical specifications

			
	<b>Novy Pendant 95</b> 710101-p3 Mineral White 710102-p3 Mineral Black	<b>Novy Pendant 125</b> 710201-p3 Mineral White 710202-p3 Mineral Black	<b>Novy Pendant 155</b> 710301-p3 Mineral White 710302-p3 Mineral Black
<b>Functions</b>			
Controls	Gesture Control	Gesture Control	Gesture Control
<b>Lighting</b>			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	648	972	1296
Colour ambient light	RGBW	RGBW	RGBW
<b>Technical characteristics</b>			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	937×31×80	1237×31×80	1537×31×80
Weight (kg)	2	2,3	2,7
Power cord position	Left / right	Left / right	Left / right
Power cord length (m)	6	5,7	5,4
Length of suspension cables (m)	4,5	4,5	4,5
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

					
	<b>Novy Pendant 185</b> 710401-p3 Mineral White 710402-p3 Mineral Black	<b>Novy Pendant 215</b> 710501-p3 Mineral White 710502-p3 Mineral Black	<b>Novy Pendant 245</b> 710601-p3 Mineral White 710602-p3 Mineral Black	<b>Novy Pendant 275</b> 710701-p3 Mineral White 710702-p3 Mineral Black	<b>Novy Pendant 305</b> 710801-p3 Mineral White 710802-p3 Mineral Black
	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1620	1944	2268	2592	2916
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1837×31×80	2137×31×80	2437×31×80	2737×31×80	3037×31×80
	3,1	3,5	3,9	4,3	4,7
	Left / right	Left / right	Left / right	Left / right	Left / right
	5,1	4,8	4,5	4,2	3,9
	4,5	4,5	4,5	4,5	4,5
	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120







NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Wall

- Designer wall lighting with Gesture Control
- Ideal lighting above a kitchen worktop
- Top and bottom lighting
- Easy to switch between functional light and ambient light
- Adjustable light intensity and colour temperature from 2,700 K to 4,000 K
- Option to set ambient colour
- Available in Mineral Black and Mineral White

Novy Wall / Designer lighting



264 – 265



**Gesture Control**  
Lighting equipped with gesture control



**Ambient light**  
Next to functional light, ambient light is also provided



	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Wall 95	937	Mineral White	36	740101	£900
Novy Wall 125	1237	Mineral White	48	740201	£950
Novy Wall 155	1537	Mineral White	60	740301	£1,000
Novy Wall 185	1837	Mineral White	72	740401	£1,050
Novy Wall 215	2137	Mineral White	84	740501	£1,100
Novy Wall 245	2437	Mineral White	96	740601	£1,150
Novy Wall 275	2737	Mineral White	108	740701	£1,200
Novy Wall 305	3037	Mineral White	120	740801	£1,250
Novy Wall 95	937	Mineral Black	36	740102	£900
Novy Wall 125	1237	Mineral Black	48	740202	£950
Novy Wall 155	1537	Mineral Black	60	740302	£1,000
Novy Wall 185	1837	Mineral Black	72	740402	£1,050
Novy Wall 215	2137	Mineral Black	84	740502	£1,100
Novy Wall 245	2437	Mineral Black	96	740602	£1,150
Novy Wall 275	2737	Mineral Black	108	740702	£1,200
Novy Wall 305	3037	Mineral Black	120	740802	£1,250

Technical drawings, see p. 278

Video  
Gesture Control



ABOUT  
NOVY



COOKER  
HOOD  
GUIDELINES



VENTING  
HOODS



CEILING  
UNITS



BUILT-IN  
COOKER  
HOODS



TELESCOPIC  
COOKER  
HOODS



WALL-  
MOUNTED  
COOKER  
HOODS



ISLAND  
COOKER  
HOODS



COOKER  
HOOD  
ACCESSORIES



HOBS






DESIGNER  
LIGHTING








INFO



Technical specifications

			
	<b>Novy Wall 95</b> 740101 Mineral White 740102 Mineral Black	<b>Novy Wall 125</b> 740201 Mineral White 740202 Mineral Black	<b>Novy Wall 155</b> 740301 Mineral White 740302 Mineral Black
<b>Functions</b>			
Controls	Gesture Control	Gesture Control	Gesture Control
<b>Lighting</b>			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	972	1296	1620
Colour ambient light	RGBW	RGBW	RGBW
<b>Technical characteristics</b>			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	937×31×80	1237×31×80	1537×31×80
Weight (kg)	1,8	2,1	2,5
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

					
	<b>Novy Wall 185</b> 740401 Mineral White 740402 Mineral Black	<b>Novy Wall 215</b> 740501 Mineral White 740502 Mineral Black	<b>Novy Wall 245</b> 740601 Mineral White 740602 Mineral Black	<b>Novy Wall 275</b> 740701 Mineral White 740702 Mineral Black	<b>Novy Wall 305</b> 740801 Mineral White 740802 Mineral Black
	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1944	2268	2592	2916	3240
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1837×31×80	2137×31×80	2437×31×80	2737×31×80	3037×31×80
	2,8	3,2	3,5	3,9	4,2
	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120






NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Shelf

- A stylish shelf with integrated gesture-controlled (Pro) LED light
- Ideal in a kitchen without upper cabinets
- Top and bottom lighting
- Easy to switch between functional light and ambient light
- Adjustable light intensity and colour temperature from 2,700 K to 4,000 K
- Option to set ambient colour
- Available in Mineral Black and Mineral White

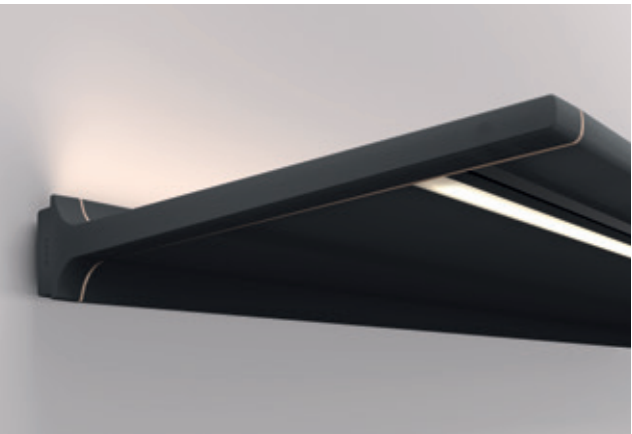

**Gesture Control**  
Lighting equipped with gesture control



**Ambient light**  
Next to functional light, ambient light is also provided






	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Shelf 95	937	Mineral White	36	720101	£1,200
Novy Shelf 125	1237	Mineral White	48	720201	£1,250
Novy Shelf 155	1537	Mineral White	60	720301	£1,300
Novy Shelf 185	1837	Mineral White	72	720401	£1,350
Novy Shelf 215	2137	Mineral White	84	720501	£1,400
Novy Shelf 245	2437	Mineral White	96	720601	£1,500
Novy Shelf 275	2737	Mineral White	108	720701	£1,600
Novy Shelf 305	3037	Mineral White	120	720801	£1,700
Novy Shelf 95	937	Mineral Black	36	720102	£1,200
Novy Shelf 125	1237	Mineral Black	48	720202	£1,250
Novy Shelf 155	1537	Mineral Black	60	720302	£1,300
Novy Shelf 185	1837	Mineral Black	72	720402	£1,350
Novy Shelf 215	2137	Mineral Black	84	720502	£1,400
Novy Shelf 245	2437	Mineral Black	96	720602	£1,500
Novy Shelf 275	2737	Mineral Black	108	720702	£1,600
Novy Shelf 305	3037	Mineral Black	120	720802	£1,700






Technical drawings, see p. 279

Video  
Gesture Control



Technical specifications

	 Novy Shelf 95 720101 Mineral White 720102 Mineral Black	 Novy Shelf 125 720201 Mineral White 720202 Mineral Black	 Novy Shelf 155 720301 Mineral White 720302 Mineral Black
Functions			
Controls	Gesture Control	Gesture Control	Gesture Control
Lighting			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	972	1296	1620
Colour ambient light	RGBW	RGBW	RGBW
Technical characteristics			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	937×320×65	1237×320×65	1537×320×65
Weight (kg)	5,1	7,8	9,3
Maximum load capacity* (kg)	27	36	45
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

	 Novy Shelf 185 720401 Mineral White 720402 Mineral Black	 Novy Shelf 215 720501 Mineral White 720502 Mineral Black	 Novy Shelf 245 720601 Mineral White 720602 Mineral Black	 Novy Shelf 275 720701 Mineral White 720702 Mineral Black	 Novy Shelf 305 720801 Mineral White 720802 Mineral Black
	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1944	2268	2592	2916	3240
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1837×320×65	2137×320×65	2437×320×65	2737×320×65	3037×320×65
	11,1	12,8	14,6	16,3	18
	54	63	72	81	90
	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120

\* Depending on load-bearing wall and fixing material used





red dot winner 2023



NOVY

PREMIUM  
INNOVATION  
PRODUCT

# Novy Shelf Pro

- The Novy Shelf Pro allows to adjust the width of the light beam over its full length
- A stylish shelf with integrated gesture-controlled (Pro) LED light
- Ideal in a kitchen without upper cabinets
- Top and bottom lighting
- Easy to swith between functional light and ambient light
- Adjustable light intensity and colour temperature from 2,700 K to 4,000 K
- Option to set ambient colour
- Available in Mineral Black and Mineral White

Novy Shelf Pro / Designer lighting



272 – 273



**Gesture Control Pro**  
Extension to Gesture Control to adjust beam width



**Ambient light**  
Next to functional light, ambient light is also provided










	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Shelf Pro 125	1237	Mineral White	65	730201	£1,500
Novy Shelf Pro 155	1537	Mineral White	65	730301	£1,600
Novy Shelf Pro 185	1837	Mineral White	77	730401	£1,700
Novy Shelf Pro 215	2137	Mineral White	90	730501	£1,800
Novy Shelf Pro 245	2437	Mineral White	104	730601	£1,900
Novy Shelf Pro 275	2737	Mineral White	115	730701	£2,000
Novy Shelf Pro 305	3037	Mineral White	128	730801	£2,100
Novy Shelf Pro 125	1237	Mineral Black	65	730202	£1,500
Novy Shelf Pro 155	1537	Mineral Black	65	730302	£1,600
Novy Shelf Pro 185	1837	Mineral Black	77	730402	£1,700
Novy Shelf Pro 215	2137	Mineral Black	90	730502	£1,800
Novy Shelf Pro 245	2437	Mineral Black	104	730602	£1,900
Novy Shelf Pro 275	2737	Mineral Black	115	730702	£2,000
Novy Shelf Pro 305	3037	Mineral Black	128	730802	£2,100

Technical drawings, see p. 279

Video  
Gesture Control Pro



Technical specifications

	 Novy Shelf Pro 125 730201 Mineral White 730202 Mineral Black	 Novy Shelf Pro 155 730301 Mineral White 730302 Mineral Black	 Novy Shelf Pro 185 730401 Mineral White 730402 Mineral Black	 Novy Shelf Pro 215 730501 Mineral White 730502 Mineral Black	 Novy Shelf Pro 245 730601 Mineral White 730602 Mineral Black	 Novy Shelf Pro 275 730701 Mineral White 730702 Mineral Black	 Novy Shelf Pro 305 730801 Mineral White 730802 Mineral Black
Functions							
Controls	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro
Lighting							
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	4232	5290	6348	7406	8464	9522	10580
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95	≥95	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	1296	1620	1944	2268	2592	2916	3240
Colour ambient light	RGBW	RGBW	RGBW	RGBW	RGBW	RGBW	RGBW
Technical characteristics							
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	1237×320×65	1537×320×65	1837×320×65	2137×320×65	2437×320×65	2737×320×65	3037×320×65
Weight (kg)	7,8	9,3	11,1	12,8	14,6	16,3	18
Maximum load capacity* (kg)	36	45	54	63	72	81	90
Mains voltage (V) / Elektrical connection value (W)	230 / 65	230 / 65	230 / 77	230 / 90	230 / 104	230 / 115	230 / 128

\* Depending on load-bearing wall and fixing material used





Novy Pendant 305 - Novy Panorama 90


Novy Shelf 275



## Technical drawings

## Novy Shelf / Novy Shelf Pro

720101 / 720201 / 720301 / 720401 / 720501 / 720601 / 720701 / 720801  
720102 / 720202 / 720302 / 720402 / 720502 / 720602 / 720702 / 720802  
730201 / 730301 / 730401 / 730501 / 730601 / 730701 / 730801  
730202 / 730302 / 730402 / 730502 / 730602 / 730702 / 730802

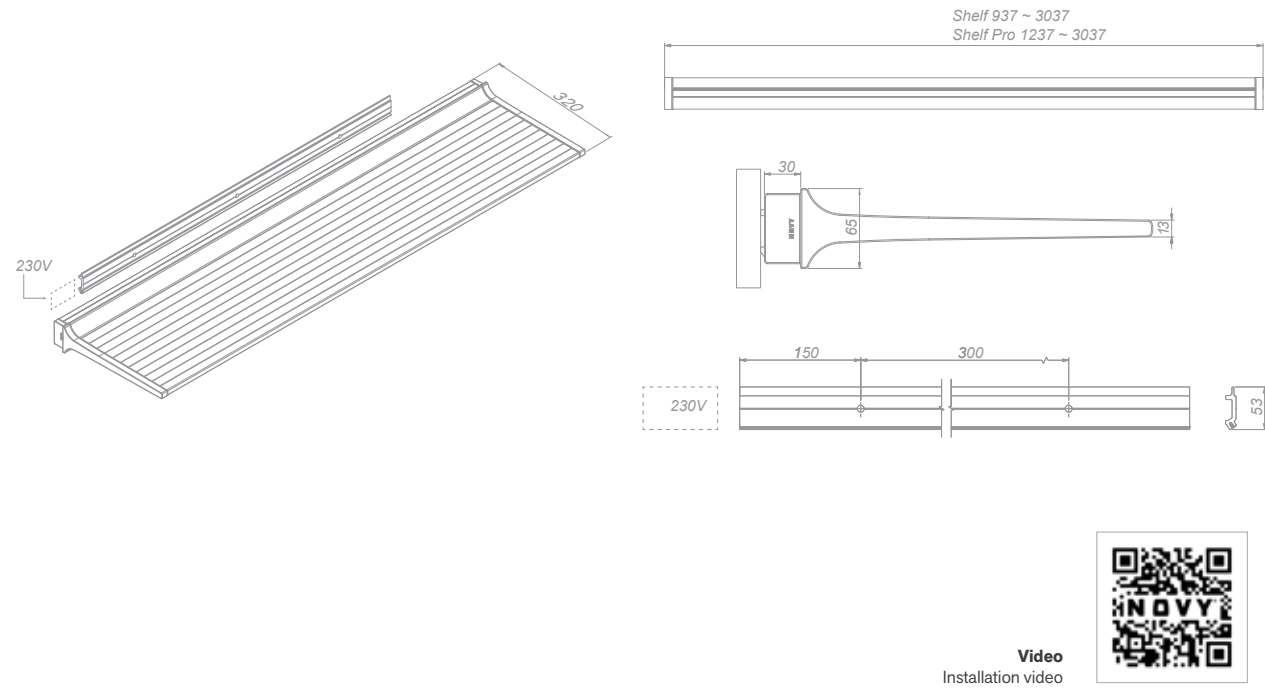



# Info

## Premium Innovation Products

p. 282

## Cooker hoods

p. 284

## Hobs

p. 285

## Lighting

p. 287



# Premium Innovation Products

Novy's dedication to innovation has led to a new generation of products. Technologically sophisticated, they set the tone in relation to aesthetics, ease of use, simplicity and, of course, silence.



Novy Cloud



















Due to their innovative and progressive features, these products are known as Novy Premium Innovation Products. This catalogue presents: Novy Panorama, Easy (Prestige), Cloud, Pureline Pro (Compact), Fusion Pro, Phantom, Pureline Frame, Mood, Gas Pro, induction hobs 1775 and 1768 and Novy Pendant, Wall, Shelf and Shelf Pro. You can recognise these products from the **Premium Innovation logo**.

## Novy Premium Partners












To support these products, Novy has decided to collaborate with **a selection of partners**. They receive extensive training and can offer you the expertise and advice you need to make the right choices. This is how Novy and its Premium Partners guarantee maximum comfort for your dream kitchen.







# Cooker hood icons






	<b>Ecosmart</b> Extra quiet, super-efficient, longlasting and energy friendly products.		<b>Design filter</b> A filter with a modern and elegant design.
	<b>Cooker hoods with a motor (direct extraction)</b> The most common model is a cooker hood with an exhaust to the outside.		<b>Perimeter extraction</b> Placing a base plate under the cooker hood concentrates the extraction around the edges. This small gap speeds up the extraction. The smaller the area, the faster the airflow. This acceleration enhances the efficiency of the extraction system.
	<b>Remote control</b> These models come with a remote control, the other cooker hoods can also be fitted with them, by ordering an extra kit.		
	<b>InTouch</b> InTouch allows you to control your Novy cooker hood from your Novy induction hob.		<b>Click&amp;Fix</b> A simple construction using a click system whereby the cooker hood can be clicked into place, after which only 4 screws need to be tightened.
	<b>Installation height</b> The installation height is the distance between the hob and the cooker hood. This height is extremely important for the optimum operation of the cooker hood. The advised installation heights are shown for each model.		<b>Cubic Motor</b> A square motor housing which can be installed remotely. The housing can be turned in any direction so that the exhaust direction can be chosen depending on the situation. This motor is designed for inside use.
	<b>Tower exhaust system</b> Optimal extraction at the height of the pots.		<b>Recirculation</b> Sometimes a cooker hood with an external exhaust isn't possible for technical reasons or isn't permitted. A recirculation cooker hood is one which returns the filtered cooking fumes back into the room. The grease in the fumes is filtered by the grease filter and the odours are absorbed by a filter with activated carbon (a monoblock filter). Damp air is not eliminated in the filter, but can be removed by the room's ventilation system. Most cooker hoods can be fitted with a recirculation accessory.
	<b>Tower exhaust system</b> Optimal extraction at the height of the pots, extraction on both sides of the tower.		
	<b>Integrated extraction</b> Powerful extraction by intergrated cooker hood.		
	<b>Automatic speed control</b> The Novy Sense sensor provides automatic speed control when cooking fumes and odour are detected.		
	<b>Novy Connect</b> Thanks to the Novy Connect App you can control your Novy device via your smartphone or tablet. With the Novy Connect App you can not only record your preferences, but also consult information and indication for the maintenance of your grease and/or carbon filter.		<b>Ambient light</b> In addition to the functional light that is provided on all cooker hoods (with the exception of Maxi Pureline and Pureline without lighting), extra ambient light is also provided on the following models: Mood, Cloud, Phantom, Pureline Pro (Compact). This light is dimmable and the colour temperature can be adjusted to the atmosphere you desire (with the exception of Phantom).

# Hob icons

	<b>Chef function</b>  The cream of the crop is the Chef function, allowing you to link the Bridge zones automatically at the push of a button. The right-hand zone in setting 9 is for intensive cooking or baking. The centre zone in setting 6 is for simmering and the left-hand zone in setting 4 is to keep dishes warm.		<b>Grill function</b>  When using this function the Flexzone function is automatically activated to create a larger cooking surface. This function allows you to grill in the most ideal conditions. See Induction Pro and Power.
	<b>Power and Super Power</b>  Each zone has its own Power function, which boosts power considerably. This function is ideal for f.e. boiling large quantities of water.		<b>Pot Move function</b>  By engaging the Pot Move function in the Pro range, you can move pots and pans to another zone, while the settings are automatically maintained.
	<b>Keep warm function</b>  The keep warm function makes it very easy to maintain a constant temperature of 70°C (or 94°C on specific models).		<b>Timer and independent cooking timer</b>  Each zone has a separate timer and the hob is also fitted with an independent cooking timer.
	<b>Stop &amp; Go</b>  Stop & Go can make sure that the power supply can be temporarily switched off. If you touch this control within 10 minutes, all the previously set levels are reinstated.		<b>Count-up timer</b> In the Pro range, each zone has a separate count-up timer which starts counting when a zone is switched on. It serves as an additional reminder whenever you choose not to set a timer yourself.
	<b>Flexzone</b>  The bridge function allows you to link two adjoining zones so that you can control them in one movement. Very handy for large pots and pans.		<b>Automatic boiling function</b> The contents of the pan are first brought to the boil for a set time and then the cooking process continues at a set lower level.

# Lighting

	<b>Black opaque glass</b> The glass lets no light pass through, which results in an even black cooking surface without being able to see inside the device.		<b>Wipe Guard</b> Lock your controls with Wipe Guard, so that the hob can be cleaned easily.
	<b>Touch Control</b> All induction hobs are simple and discreet to operate. Most of the hobs have a combination of Touch Control and slider control.		<b>Slider control</b> With the slider control you only need to slide your finger over the control to achieve the desired level. The level can also be directly selected.
	<b>Cooking zone layout</b> Cooking zone layout, zones of different power and sizes.		<b>Safe</b> When the pan is removed only the contact heat of the pan remains. The residual heat cools down very quickly. If a zone is accidentally turned on but there is no pan on the zone, nothing happens. The hob is also equipped with additional safety features: <ul style="list-style-type: none"><li>- residual heat indicator</li><li>- overheating safety</li><li>- boil over safety</li><li>- safety shut-off (when the device is left on for a long time)</li><li>- child lock</li></ul>
	<b>Cooking zone layout</b> Cooking zone layout, where there are 2 octagonal zones on the left side for more flexibility and 2 powerfull round		
	<b>Cooking zone layout</b> Cooking zone layout, with octagonal zones for maximum flexibility and cooking area.		

	<b>Gesture Control</b>  Our lights with Gesture Control (GC) are fitted with a single sensor. The location of the sensor is indicated with an icon in the centre of the fitting. You can switch the light on and off, dim it or adjust the atmosphere by changing the direction of the light (upwards or downwards) using a simple gesture under the sensor. You can also change the colour when the light is in ambient mode.		<b>Ambient light</b> In addition to the functional light, extra ambient light is also provided. This ambient light is dimmable and the colour temperature can be adjusted to the atmosphere you desire.
	<b>Gesture Control Pro</b>  The light objects equipped with Gesture Control Pro have smart sensors fitted along the length of the Shelf to enable you to alter the width and position of the light beam in addition to all of the features of the standard Gesture Control (GC). What if you don't want the light to shine along the entire length of the lamp but only where you are drinking your wine, working or reading your newspaper? Simply drag the light beam with your hand to where you want it.		



**Novy Ltd**

c/o AGA Rangemaster Ltd  
Meadow Lane, Long Eaton  
Derbyshire NG10 2GD

**Appliance Sales**

Tel: 0115 946 4000  
Email: [appliancesales@agarangemaster.co.uk](mailto:appliancesales@agarangemaster.co.uk)

**Premier Partner Aftersales**

Tel: 01952 642013 option 1 for NOVY

[www.novy.com/en-gb](http://www.novy.com/en-gb)

**Footnotes**

The prices mentioned are recommended retail prices, from 01.01.2025 to 31.12.2025. Prices only for sales in the UK, installation not included. Novy reserves the right to adjust pricing without prior notice and change model design.

Characteristics of the products on condition of changes or printing errors. All colors in this catalogue can only be represented approximately. The copy is not binding.





